MONOGRAM
Series

600x1200mm

TECHNICAL **SPECIFICATION**

LONG DURABILITY

EASY TO CLEAN

IMPACT RESISTANCE

HYGIENIC SURFACE

FIRE RESISTANCE

CHEMICAL RESISTANCE

FROST RESISTANCE

LOW WATER ABSORPTION

DIMENSIONAL STABILITY

EASY INSTALLATION

THERMAL RESISTANCE

CRAZING RESISTANCE

SUITABLE **APPLICATIONS**

RESIDENTIAL

COMMERCIAL BUILDING

HOTEL, RESTAURANT

HOSPITAL

AIRPORT

SCHOOL, COLLEGE

GYMNASIUM

HALL & CORRIDOR

MALL & SUPER MARKET

INDUSTRY

SPA

RELIGIOUS PLACE

Comfort with living life

MONOGRAM
Series


INDEX



MONOGRAM FOREST



MONOGRAM OCEAN

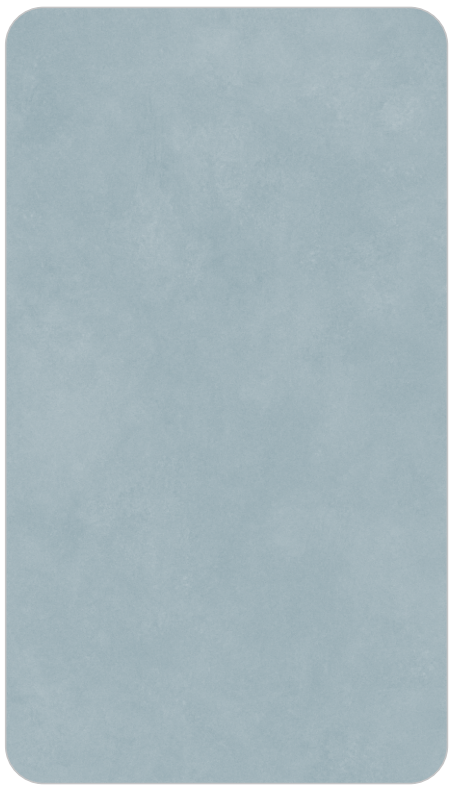

MONOGRAM DUSK



MONOGRAM GRIS



MONOGRAM BLANCO




MONOGRAM CLOUD



MONOGRAM DOVE



MONOGRAM SUEDE

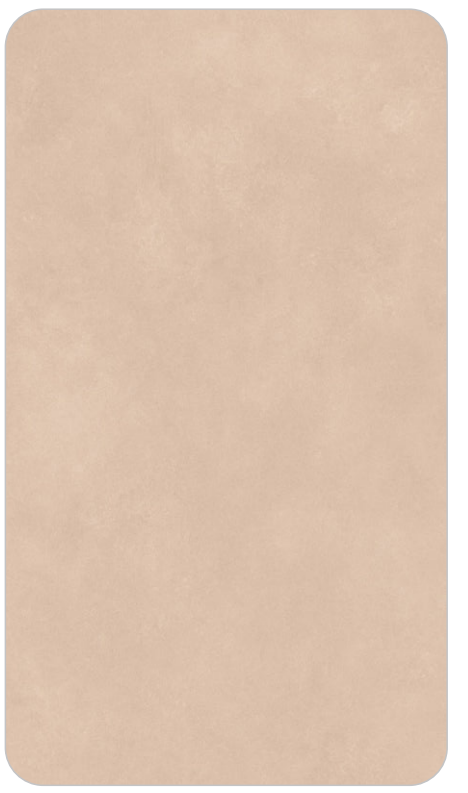

MONOGRAM MANILA




MONOGRAM CAMELLO

INDEX




MONOGRAM IVORY

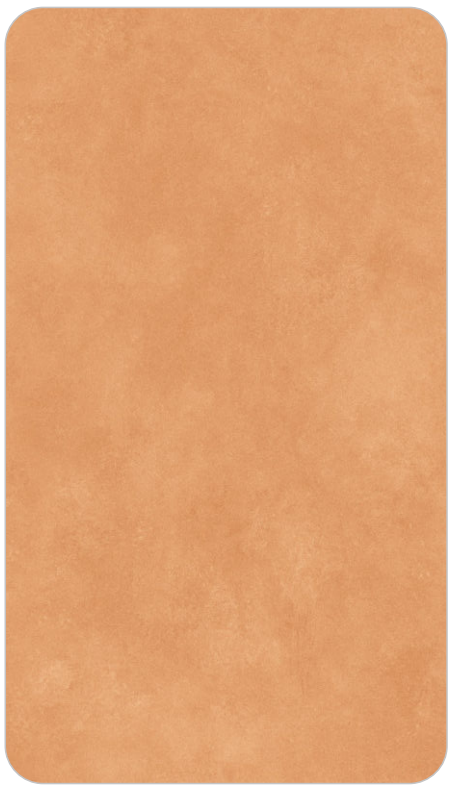

MONOGRAM BROWN



MONOGRAM TERRA

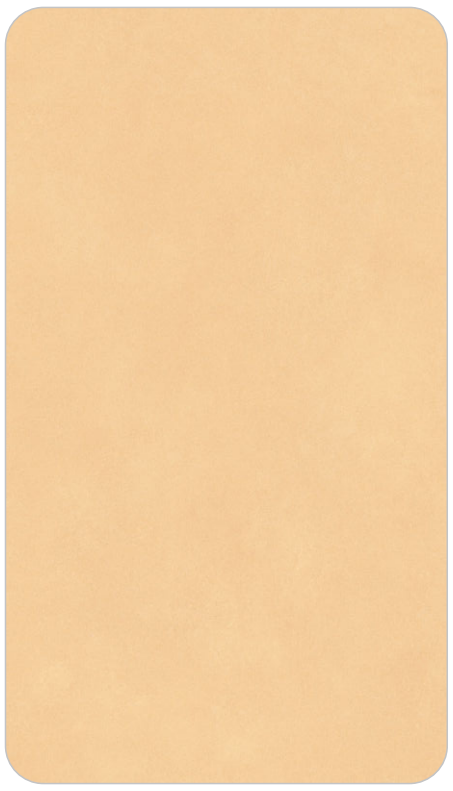

MONOGRAM CANARY



600x
1200mm

MONOGRAM SERIES




MONOGRAM FOREST R1



R2



R3





600x
1200mm


MONOGRAM SERIES




MONOGRAM OCEAN R1



R2

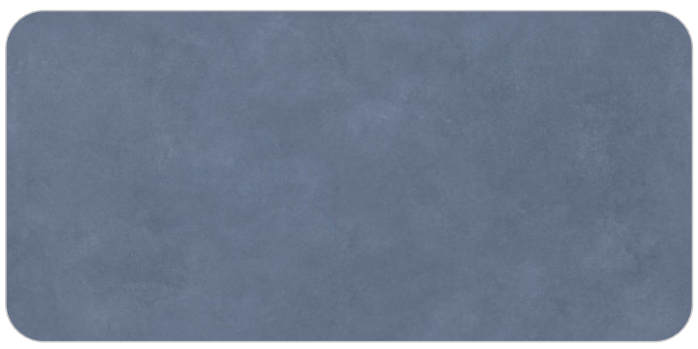

R3

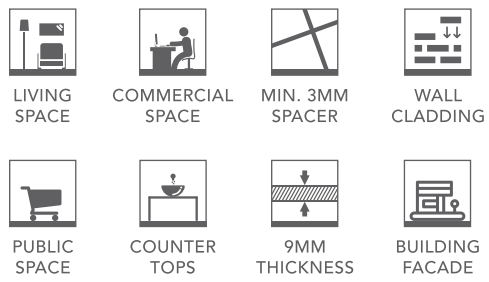



600x
1200mm


MONOGRAM SERIES



MONOGRAM DUSK R1



R2

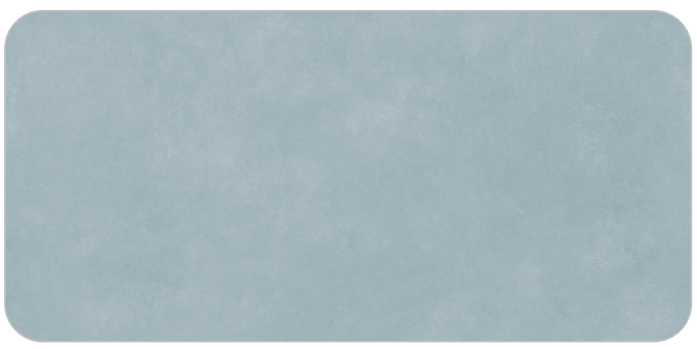

R3

LIVING SPACE
COMMERCIAL SPACE
MIN. 3MM SPACER
WALL CLADDING
PUBLIC SPACE
COUNTER TOPS
9MM THICKNESS
BUILDING FACADE



600x
1200mm

MONOGRAM SERIES




MONOGRAM GRIS R1



R2




R3

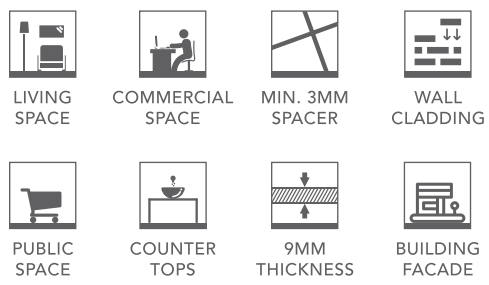



600x
1200mm

MONOGRAM SERIES

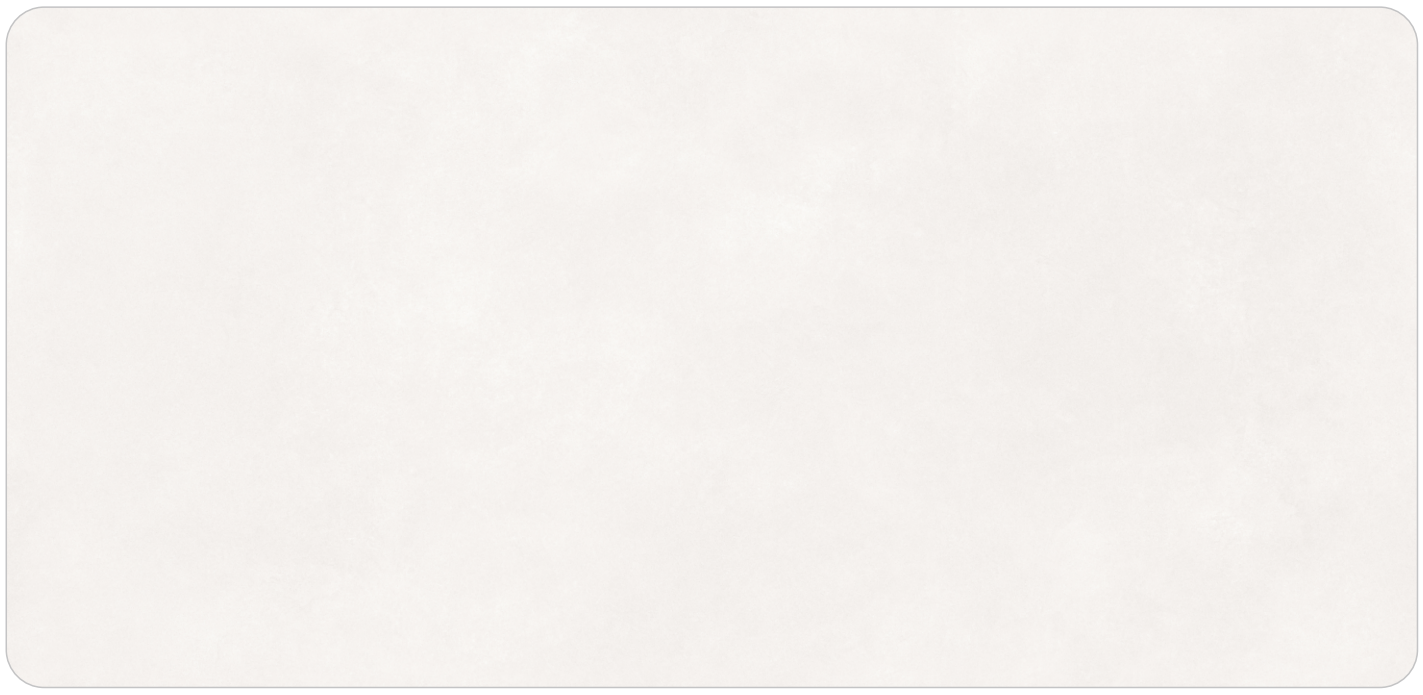

MONOGRAM BLANCO R1



R2



R3


LIVING SPACE


COMMERCIAL SPACE


MIN. 3MM SPACER


WALL CLADDING


PUBLIC SPACE


COUNTER TOPS


9MM THICKNESS


BUILDING FACADE



600x
1200mm

MONOGRAM SERIES



MONOGRAM CLOUD R1



R2



R3


LIVING SPACE


COMMERCIAL SPACE


MIN. 3MM SPACER


WALL CLADDING


PUBLIC SPACE


COUNTER TOPS


9MM THICKNESS


BUILDING FACADE



600x
1200mm

MONOGRAM SERIES




MONOGRAM DOVE R1



R2



R3

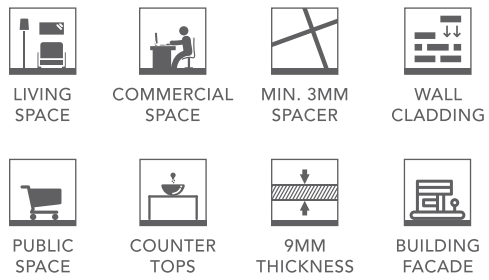



600x
1200mm

MONOGRAM SERIES



MONOGRAM SUEDE R1



R2



R3

LIVING SPACE
COMMERCIAL SPACE
MIN. 3MM SPACER
WALL CLADDING
PUBLIC SPACE
COUNTER TOPS
9MM THICKNESS
BUILDING FACADE



600x
1200mm


MONOGRAM SERIES




MONOGRAM MANILA R1



R2

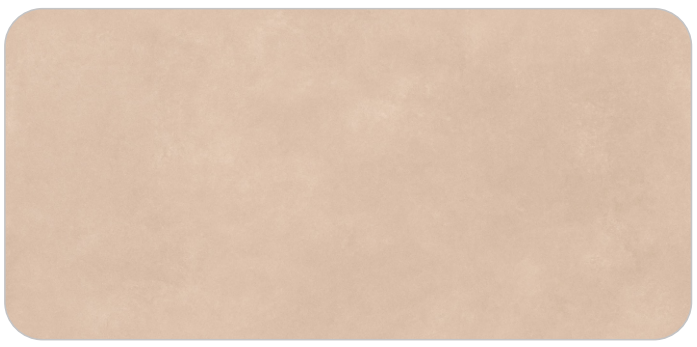


R3

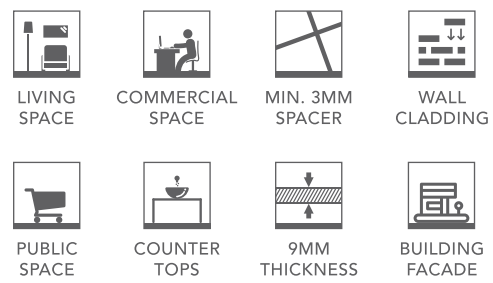



600x
1200mm

MONOGRAM SERIES

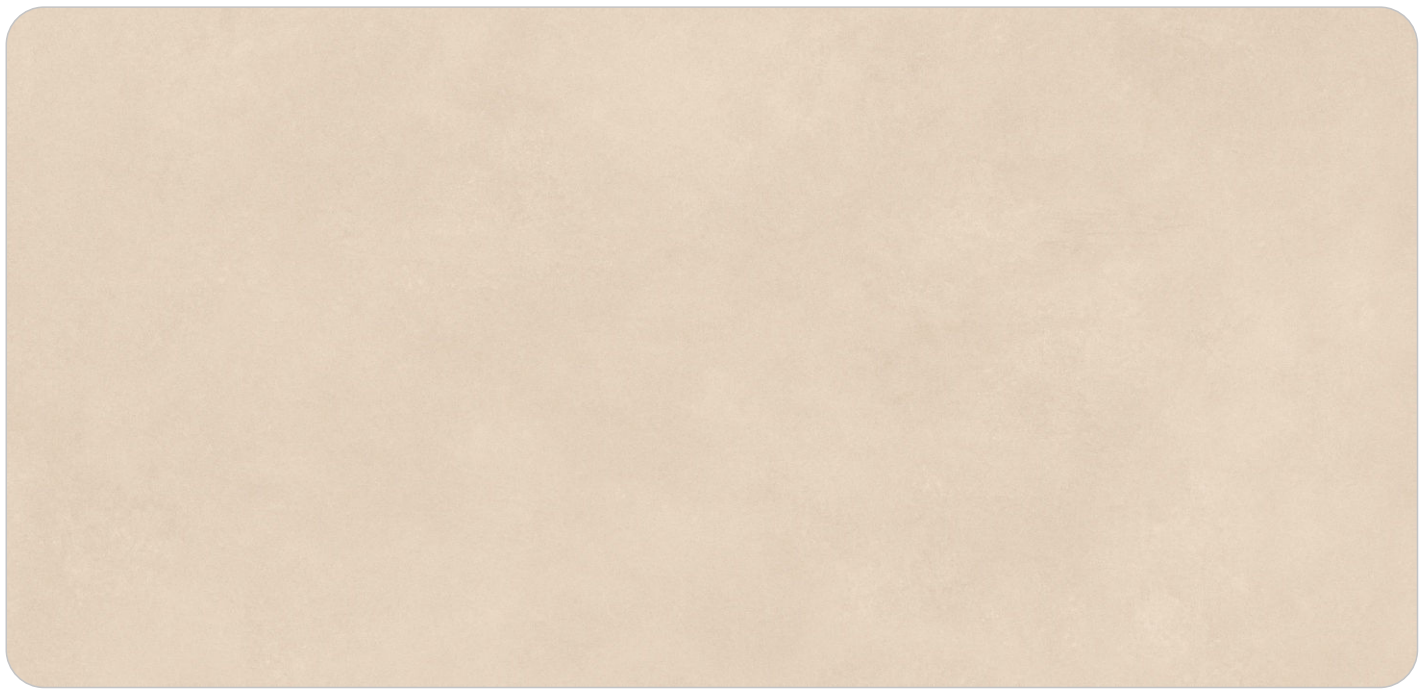


MONOGRAM CAMELLO R1



R2



R3

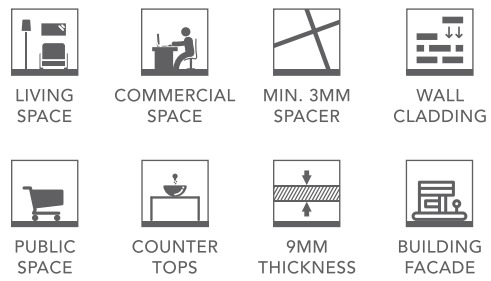



600x
1200mm

MONOGRAM SERIES



MONOGRAM IVORY R1



R2



R3


LIVING SPACE


COMMERCIAL SPACE


MIN. 3MM SPACER


WALL CLADDING


PUBLIC SPACE


COUNTER TOPS


9MM THICKNESS


BUILDING FACADE




600x
1200mm

MONOGRAM SERIES




MONOGRAM BROWN R1

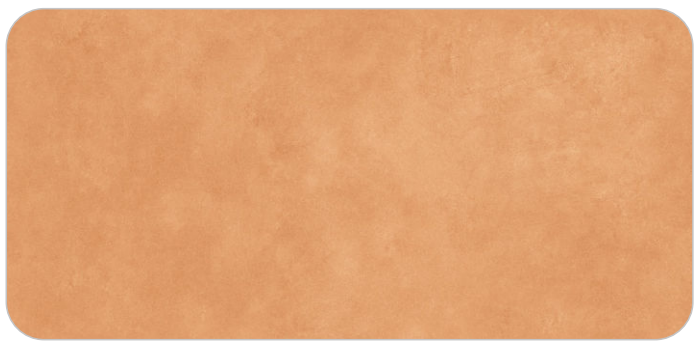

R2



R3

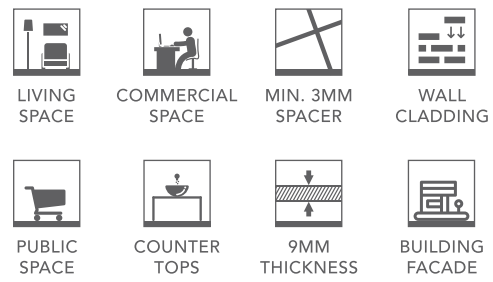



600x
1200mm

MONOGRAM SERIES




MONOGRAM TERRA R1



R2




R3

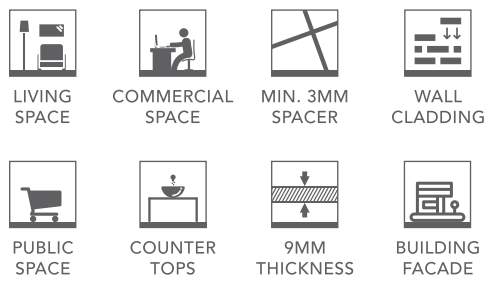



600x
1200mm

MONOGRAM SERIES

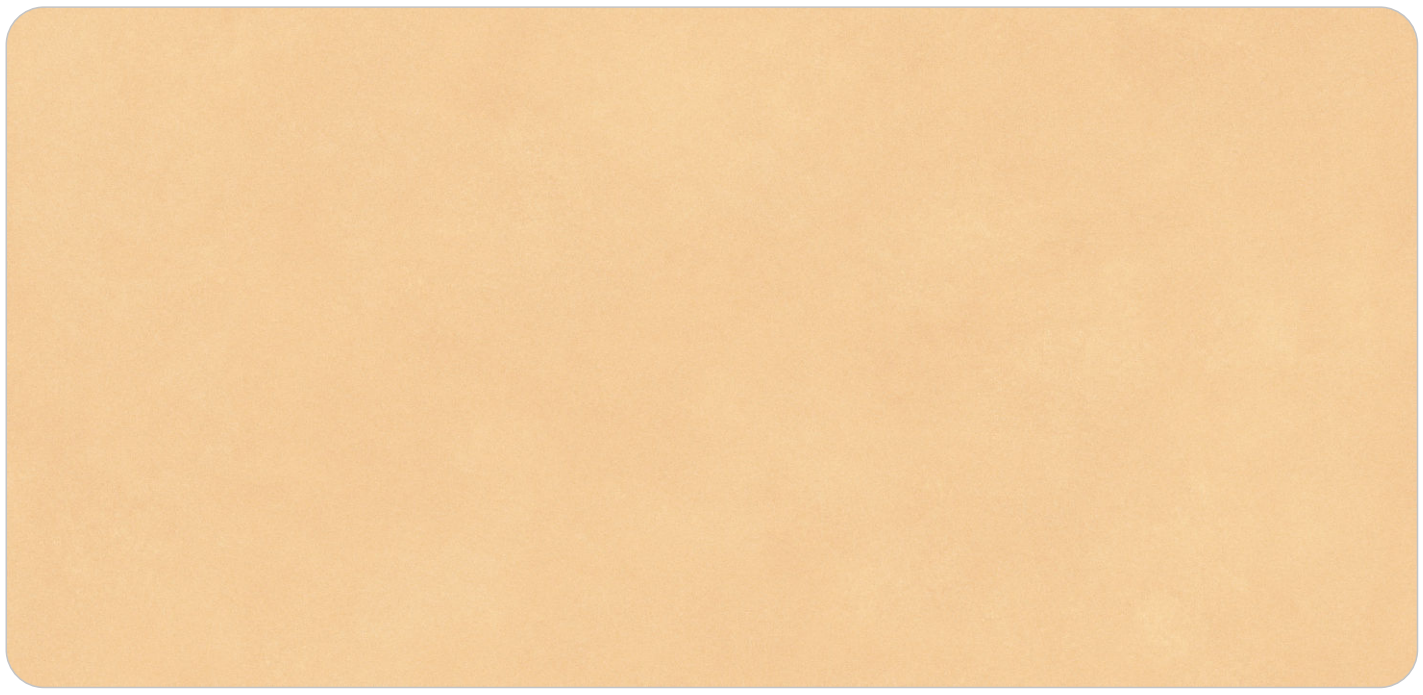

MONOGRAM CANARY R1



R2



R3

LIVING SPACE

COMMERCIAL SPACE

MIN. 3MM SPACER

WALL CLADDING

PUBLIC SPACE

COUNTER TOPS

9MM THICKNESS

BUILDING FACADE



CLEANING & MAINTENANCE

Our products are non porous (due to their high quality raw materials, stringent production parameters and state of the art technology), hence any dust or deposited waste cannot penetrate the surface.

For most cases only a damp cloth is sufficient for cleaning.

Regular cleaning highlights the aesthetic features of the surface and gives it exceptional shine.

For highly aggressive cleaning caused by some common food and substances follow the table below.

TYPE OF STAIN	CHEMICAL PRODUCT	EXAMPLE
Grease	Alkaline - Solvent	Detergent
Oil	Solvent	Ammonia, Baking Soda
Ink	Oxidant - Solvent	Alcohol, Liquid Bleach, Nail Paint Remover
Rust	Acid	Hydrochloric Acid, Vinegar, Red Harpic
Lime	Acid	Descaling Agents, Hydrochloric Acid
Cement	Acid	Hydrochloric Acid
Wine	Alkaline	Ammonia, Liquid Bleach
Coffee	Alkaline - Solvent	Ammonia, Liquid Bleach
Rubber	Solvent	Alcohol, Thinner
Plaster	Acid	Hydrochloric Acid
Candle Wax	Solvent	Alcohol, Thinner
Iodine	Oxidant	Liquid Bleach
Blood	Oxidant	Liquid Bleach
Ice Cream	Alkaline	Liquid Bleach

Note: It is recommended that any kind of stain needs to be cleaned immediately, as soon as possible.

TECHNICAL SPECIFICATIONS

CHARACTERISTICS	STANDARD AS PER ISO-13006/2018 En14411 gr.bla	OUR VALUE	TEST METHOD
Regulatory Properties			
Deviation in Length & Width	+0.5%	+0.2%	ISO 10545-2
Deviation in Thickness	+5%	+5%	ISO 10545-2
Straightness of Sides	+0.5%	+0.2%	ISO 10545-2
Rectangularity	+0.5%	+0.2%	ISO 10545-2
Surface Flatness	+0.5%	+0.3%	ISO 10545-2
Colour Difference	ΔE<1.00	ΔE<0.30	ISO 10545-16
Glossiness	As per Mfg.	>90%	Gloss Meter 60'
Structural Properties			
Water Absorption	<0.5 %	<0.3%	ISO 10545-3
Apparent Density	As Per Mfg.	>2.20 g/cc	ISO 10545-3
Massive Mechanical Properties			
Modulus of Repture	Min.35N/mm^2	Min.40N/mm^2	ISO 10545-4
Breaking Strength	Min. 1300 N	Min. 2000 N	ISO 10545-4
Impact Resistance	As per Mfg.	Min. 0.55	ISO 10545-4
Surface Mechanical Properties			
Surface Abrasion Resistance	As per Mfg.	Min. class 3	ISO 10545-7
Mohs Hardness	As per Mfg.	Min. class 4	BS EN 15771
Thermo Hygrometric Properties			
Frost Resistance	As Per Mfg.	Frost Proof	ISO 10545-12
Thermal Shock Resistance	Min. 10 Cycle	Min. 10 Cycle	ISO 10545-9
Moisture Expansion	Max. 0.6mm/m	Max. 0.02mm/m	ISO 10545-10
Thermal Expansion	Max. 9.0 x 10^{-6}	Max. 6.0x10^{-6}	ISO 10545-8
Chemical Properties			
Chemical Resistance	As Per Mfg.	No Damage	ISO 10545-13
Stain Resistance	Resistant	Resistant	ISO 10545-14
Safety Properties			
Slip Resistance	As per Mfg.	N. A.	DIN 51130
Fire Resistance	As per Mfg.	Fire Proof	N. A.

PACKING DETAILS

Dimension (mm)	No. of Pcs/Box	Square Feet
600x1200mm	2 Pcs.	15.5 Sq. ft