

MURAL
COLLECTION
100X100MM
(GLOSSY & MATT)
GLAZED PORCELAIN TILES

MURAL
COLLECTION


(4"X4") 100X100MM
GLAZED PORCELAIN TILES

GLOSSY MATT 8MM


03 MURAL DESIGNS **05** BASE DESIGNS

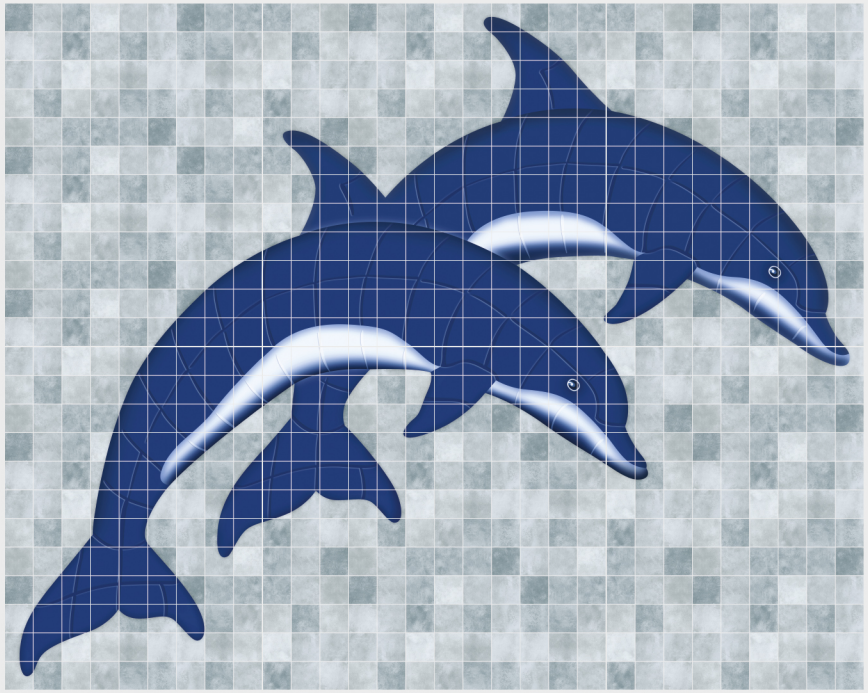

DOLPHINS
Length : 8 feet
Width : 10 feet

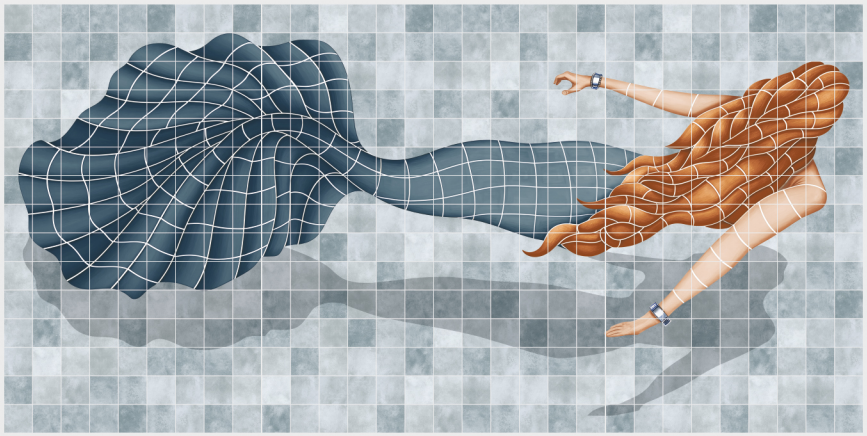


MERMAID
Length : 5 feet
Width : 10 feet



TURTLE
Length : 2 feet
Width : 2 feet

306X306MM
AVAILABLE IN NET
(9 PCS)



100X100MM



The Mural Collection brings artistic expression to swimming pools with detailed mosaic like compositions, creating visually captivating underwater designs that combine durability, precision, and lasting beauty for a more elegant pool environment.


MURAL
COLLECTION

(4"X4") 100X100MM
GLAZED PORCELAIN TILES

LOW WATER
ABSORTION E≤0.5%


GLOSSY

8MM

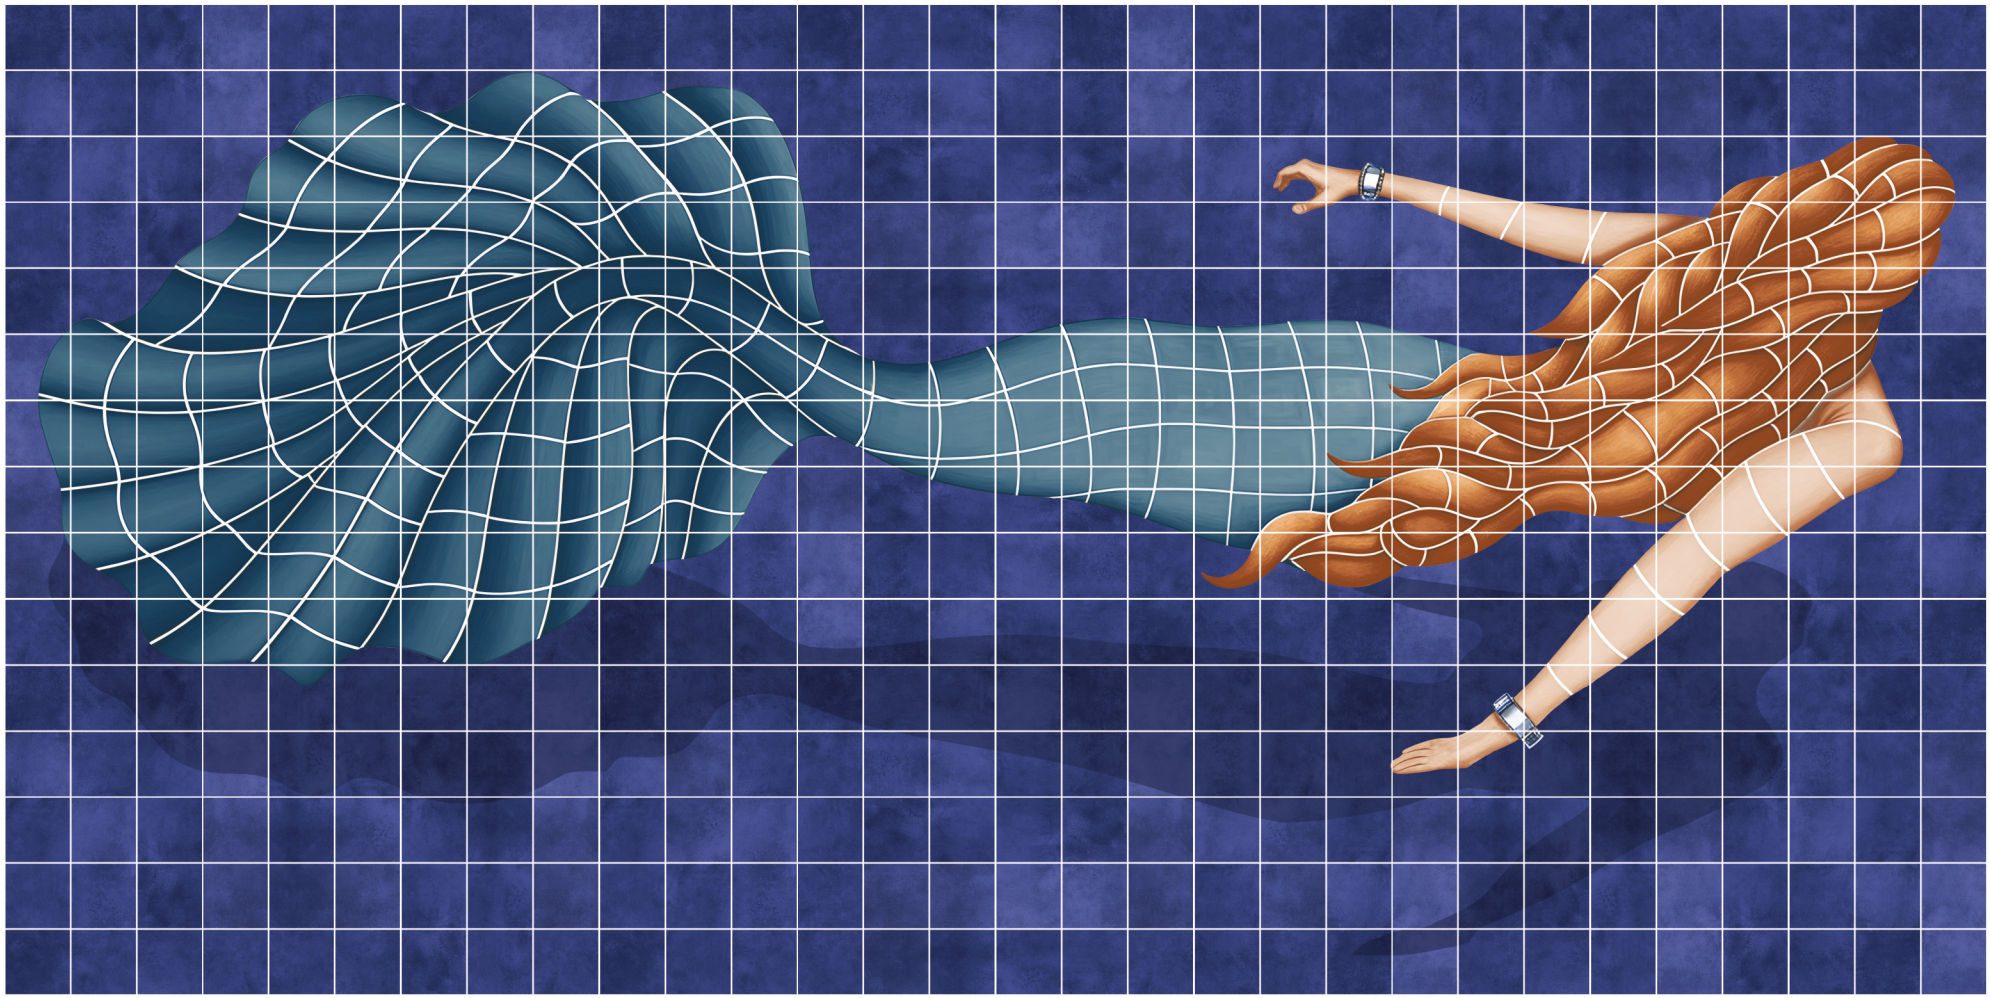

40013 MERMAID | **40013 BASE**

TOTAL POSTER SIZE : **5**(Length)**X10**(Width) **FEET**

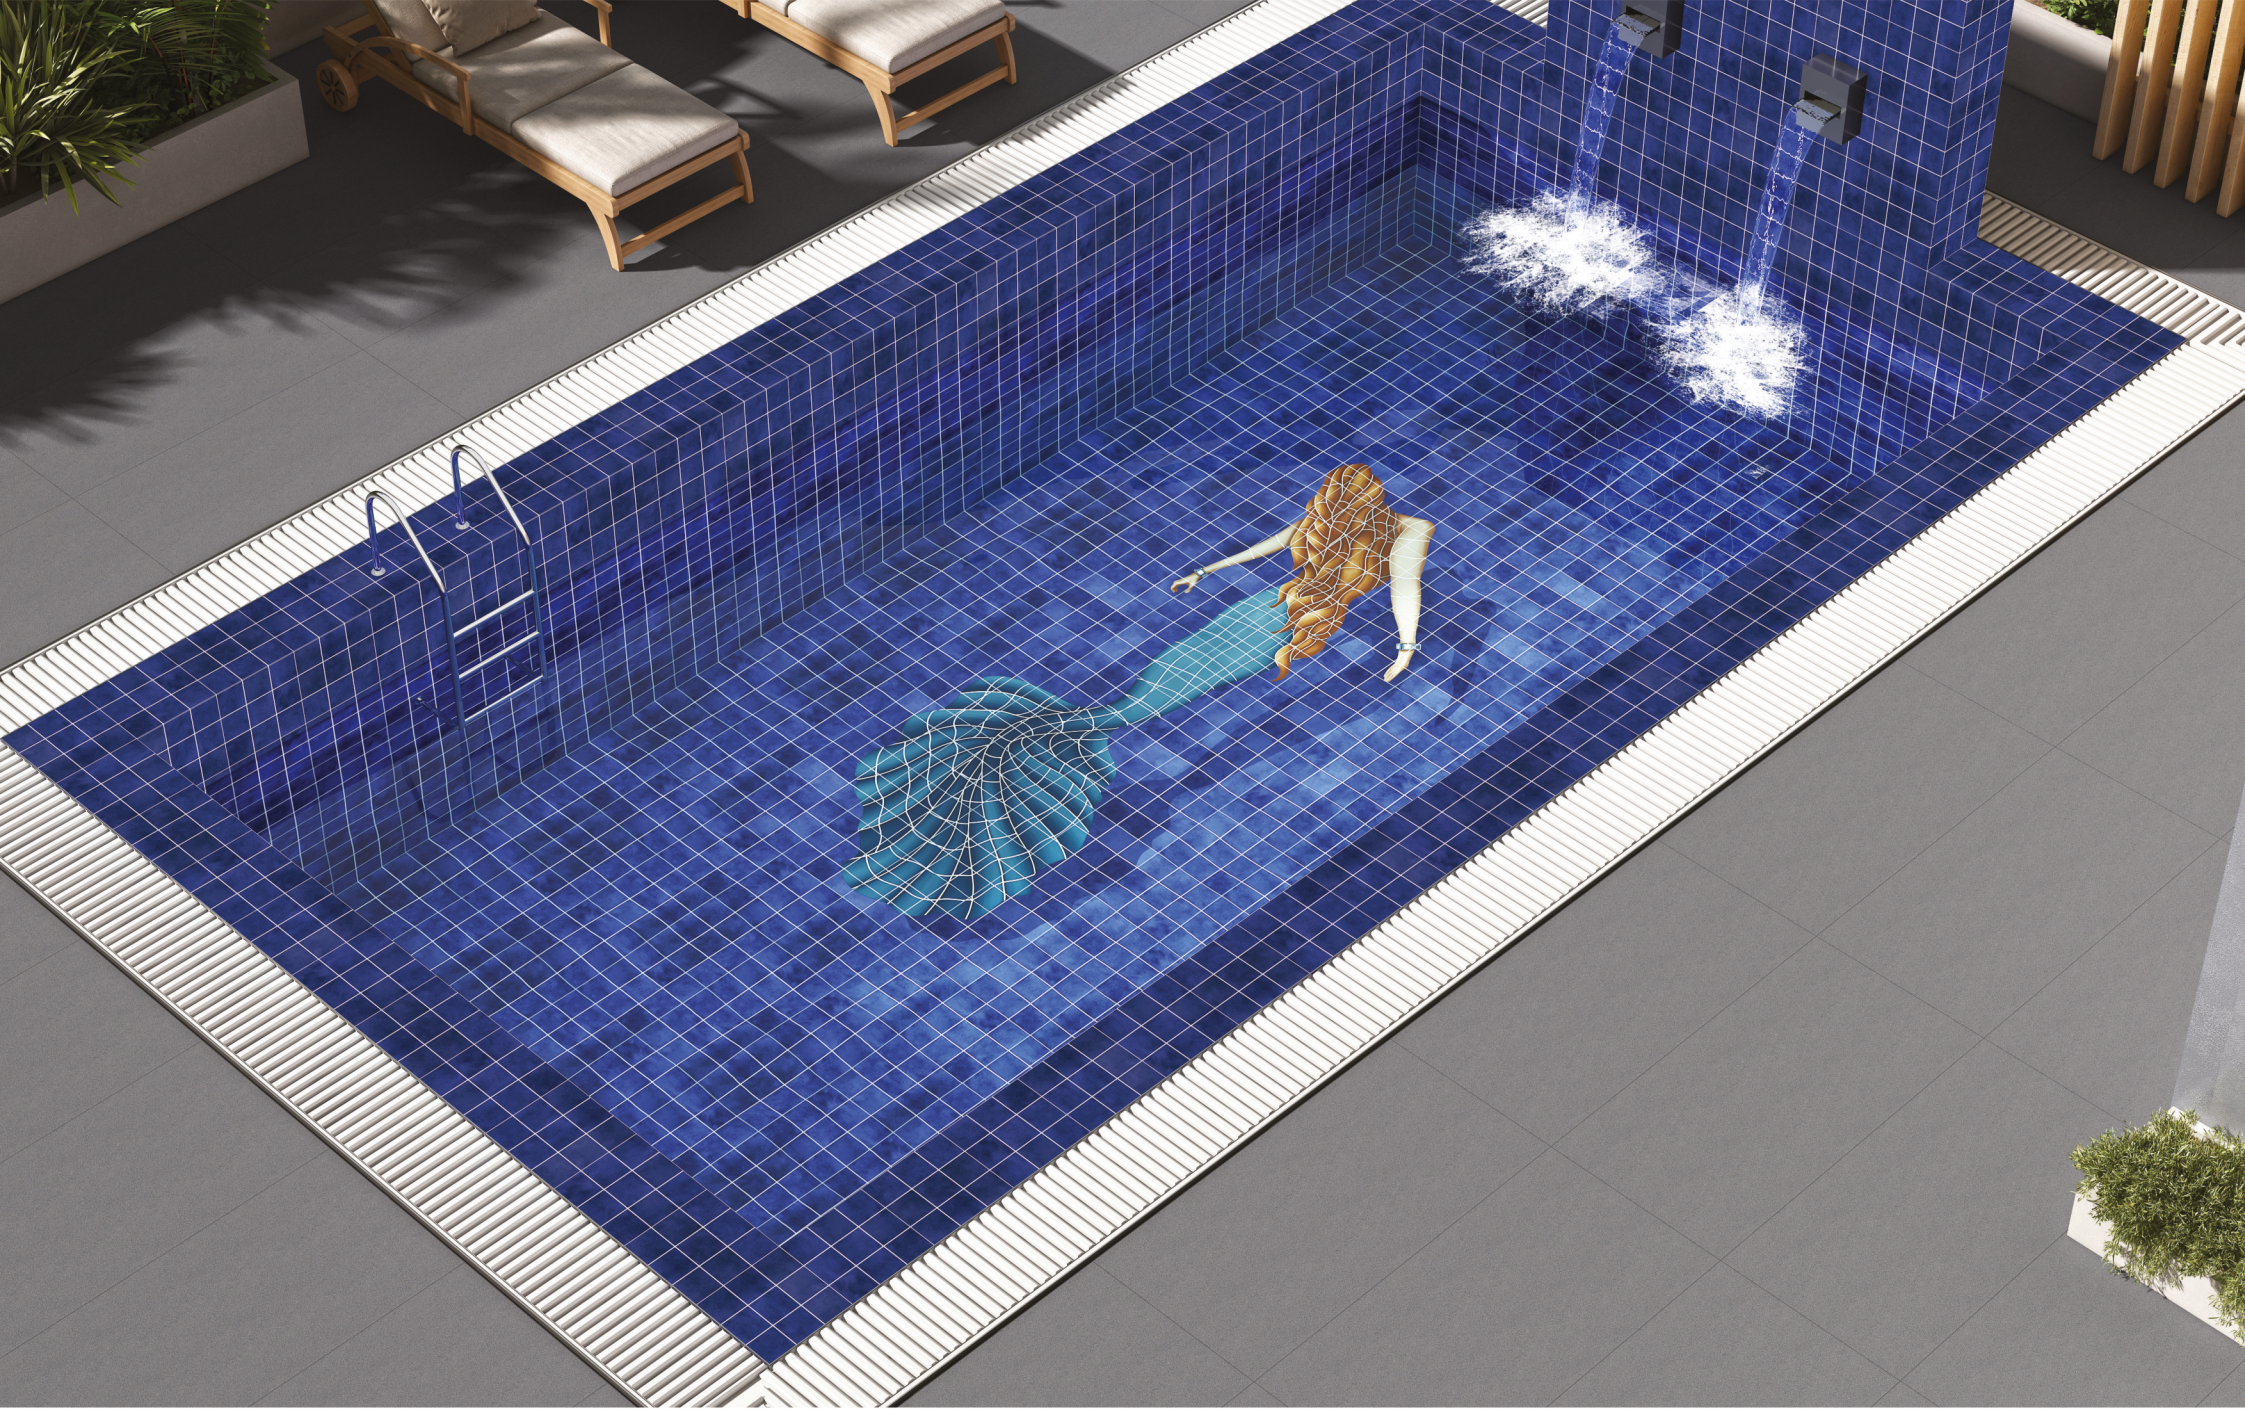

40013 MERMAID | 40013 BASE


MURAL
COLLECTION

(4"X4") 100X100MM
GLAZED PORCELAIN TILES

LOW WATER
ABSORTION E≤0.5%

GLOSSY


8MM

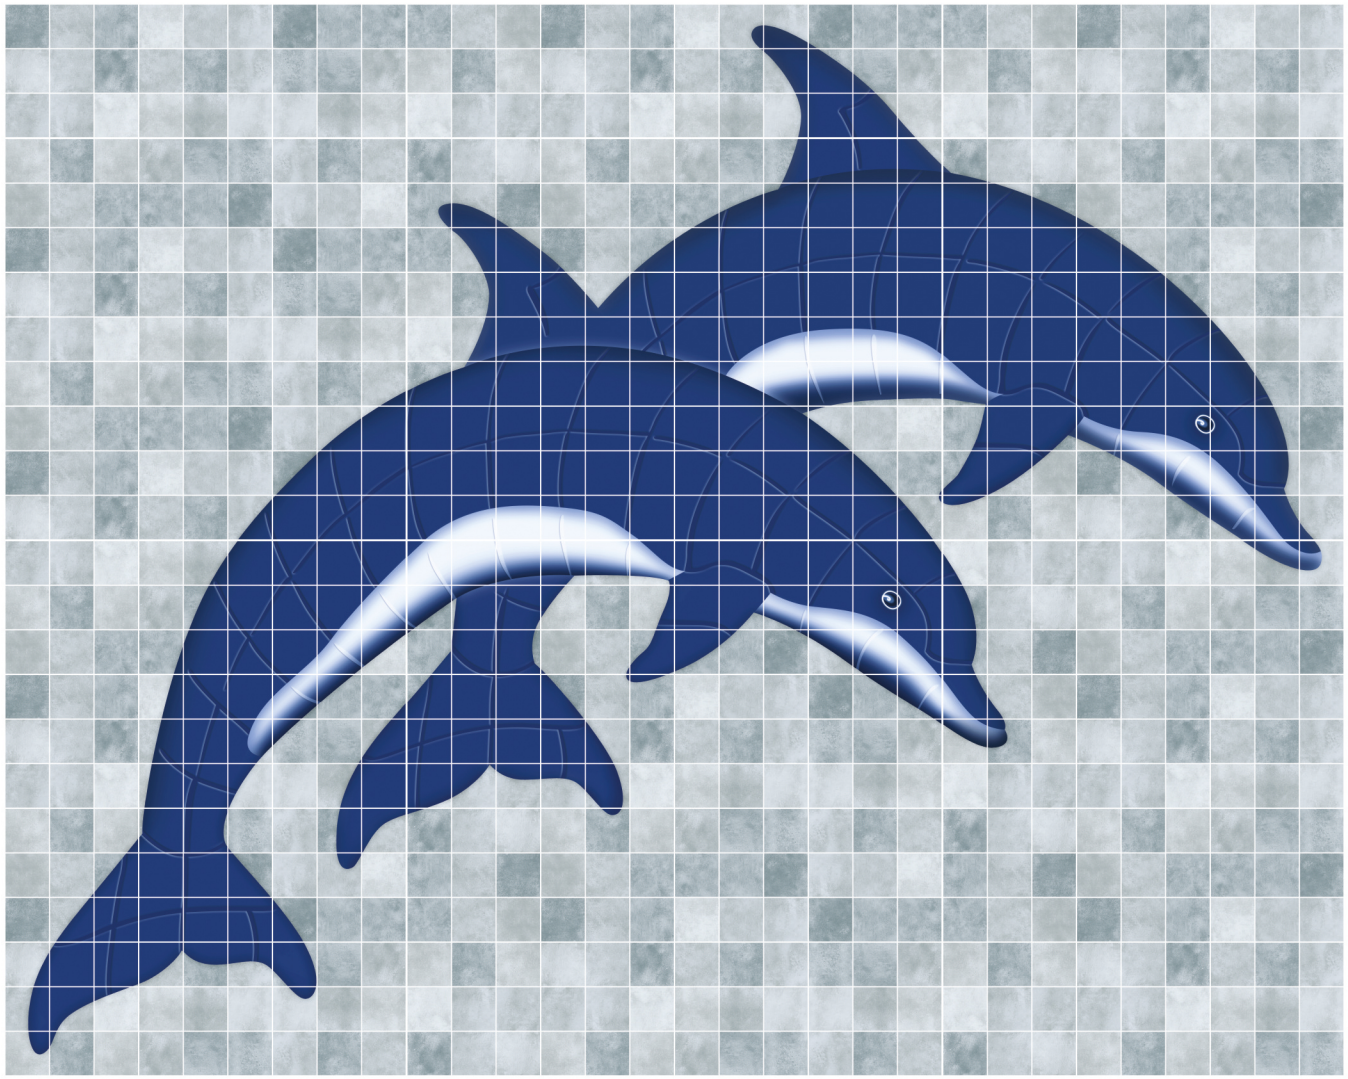

40017 DOLPHINS | 40017 BASE

TOTAL POSTER SIZE : **8**(Length)**X10**(Width) **FEET**

TOTAL POSTER SIZE :
2(Length)**X2**(Width) **FEET**



40017 TURTLE


MURAL
COLLECTION

(4"X4") 100X100MM
GLAZED PORCELAIN TILES

LOW WATER
ABSORTION E≤0.5%

GLOSSY

8MM

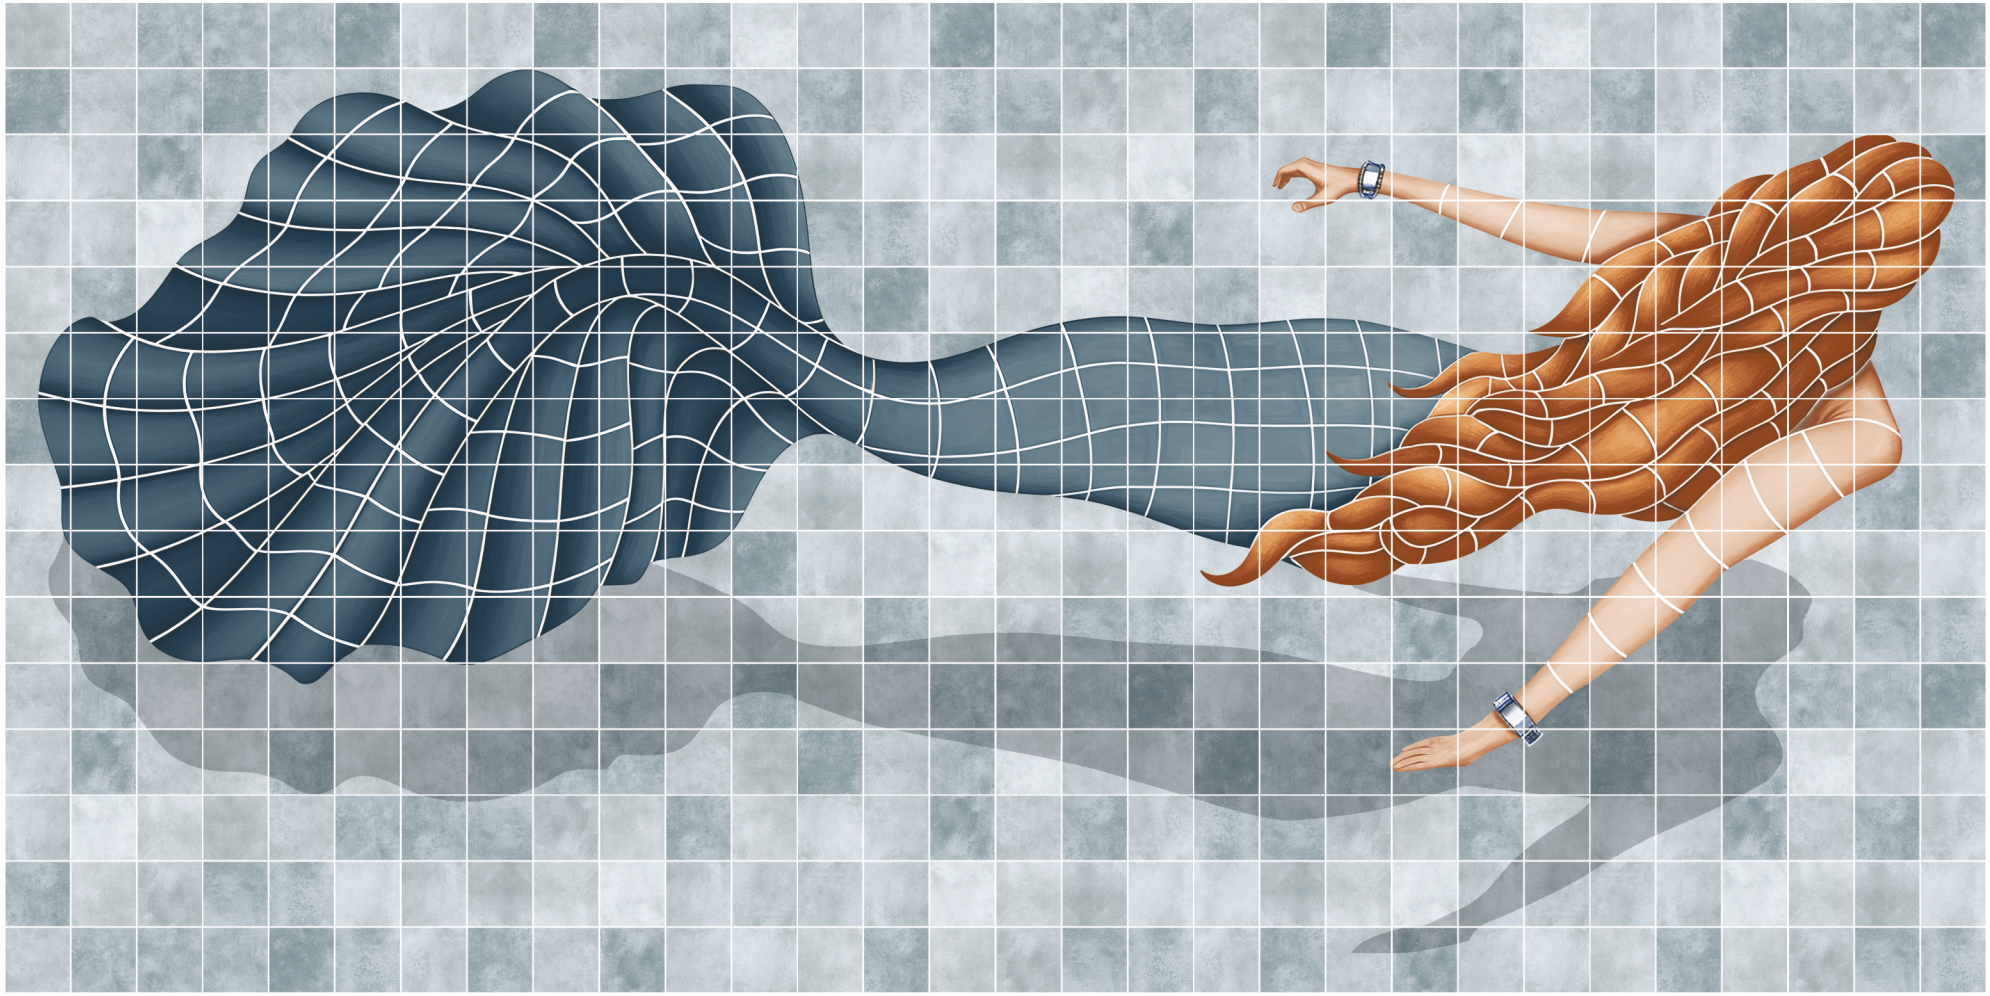

40017 MERMAID | 40017 BASE

TOTAL POSTER SIZE : **5**(Length)**X10**(Width) **FEET**



40017 DOLPHINS | 40017 TURTLE | 40017 MERMAID | 40017 BASE


MURAL
COLLECTION

(4"X4") 100X100MM
GLAZED PORCELAIN TILES

LOW WATER
ABSORTION E≤0.5%

GLOSSY

8MM

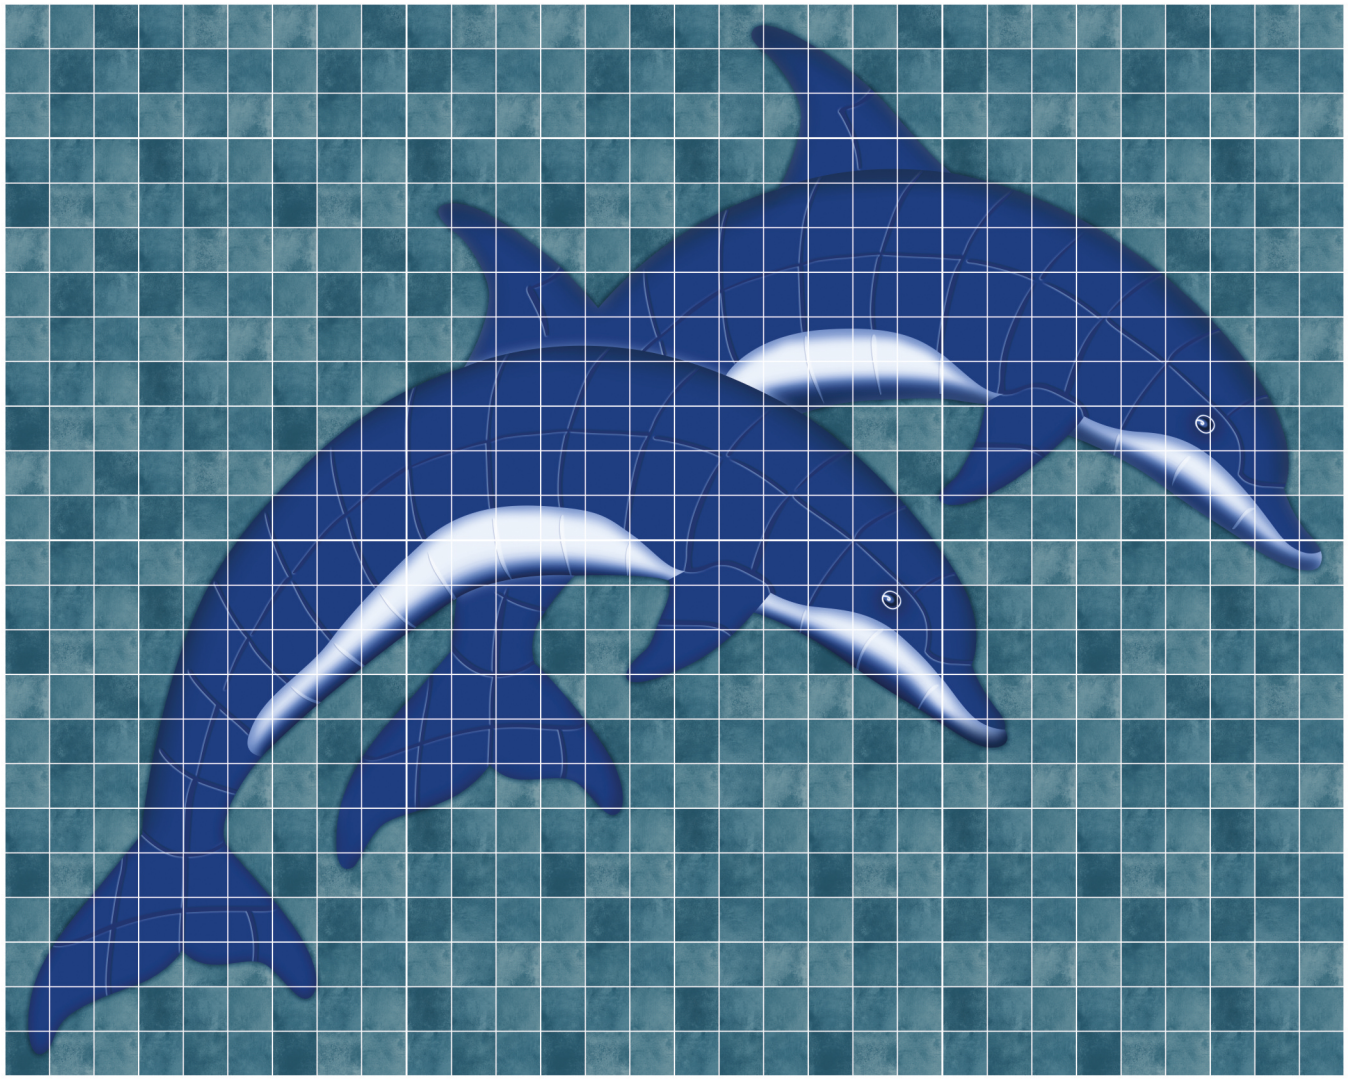


40018 DOLPHINS | 40018 BASE

TOTAL POSTER SIZE : **8**(Length)**X10**(Width) **FEET**

TOTAL POSTER SIZE :
2(Length)**X2**(Width) **FEET**



40018 TURTLE

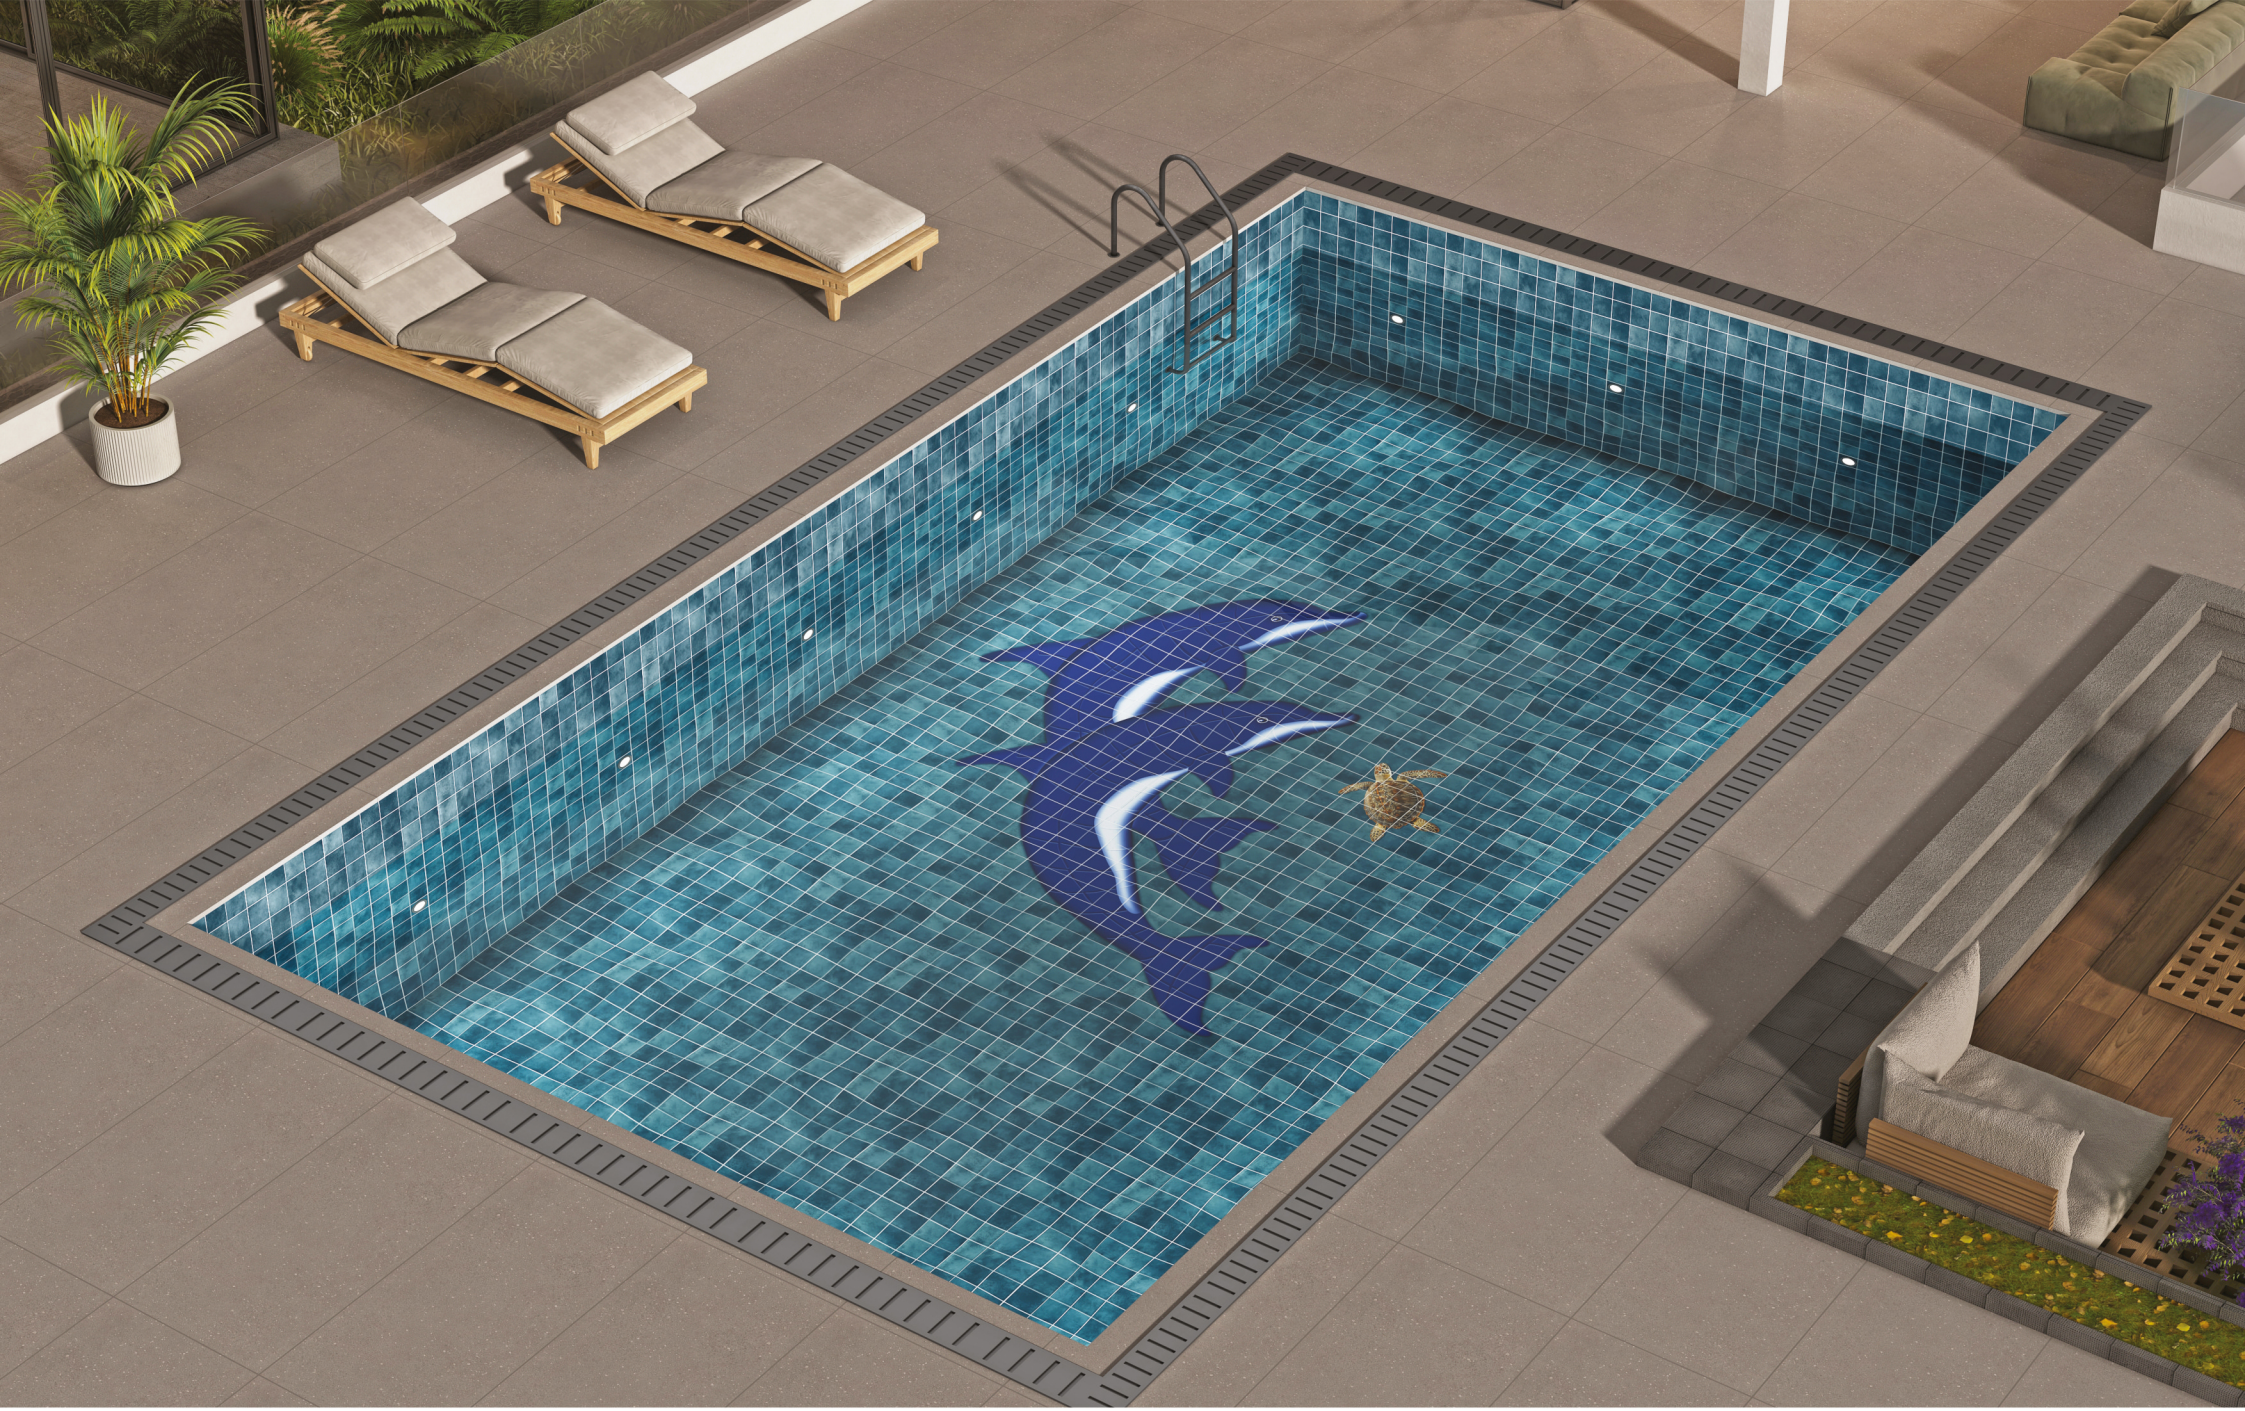

40018 DOLPHINS | 40018 TURTLE | 40018 BASE


MURAL
COLLECTION

(4"X4") 100X100MM
GLAZED PORCELAIN TILES

LOW WATER
ABSORTION E≤0.5%


MATT

8MM

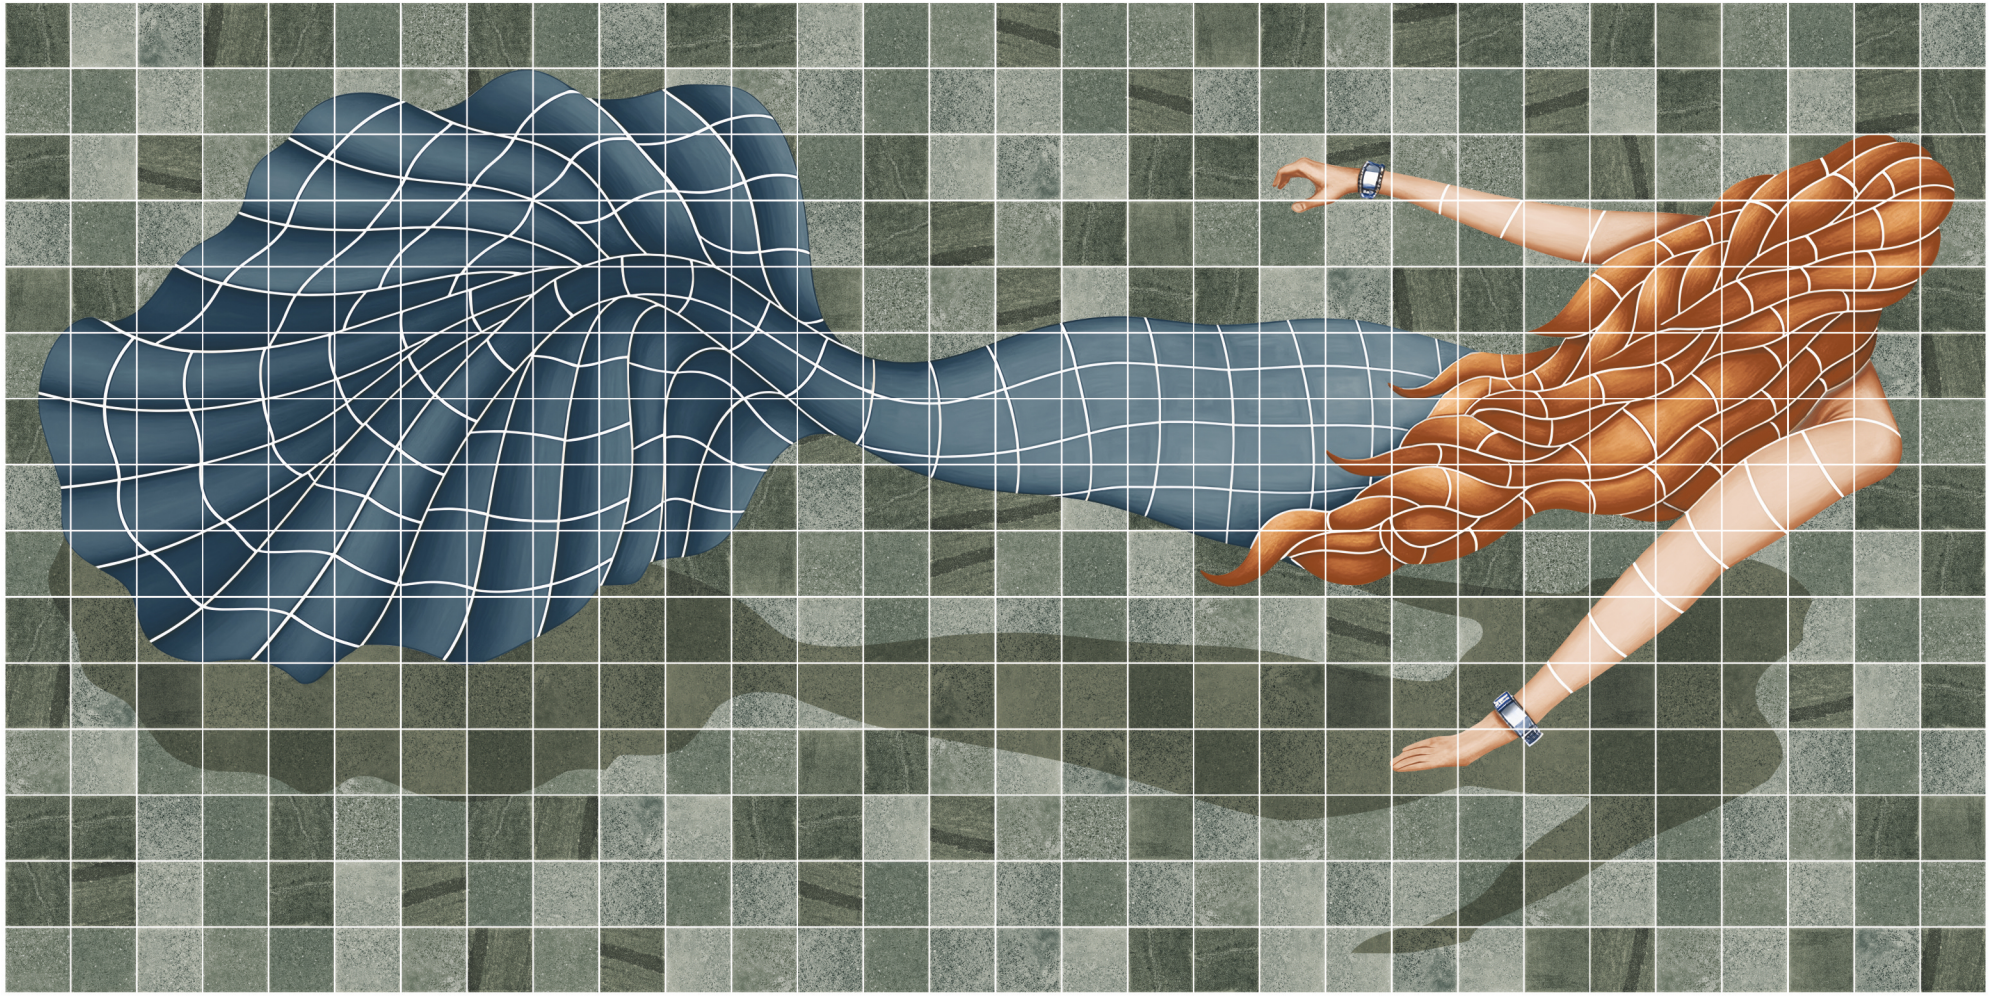

40621 MERMAID | 40621 BASE

TOTAL POSTER SIZE : **5**(Length)**X10**(Width) **FEET**

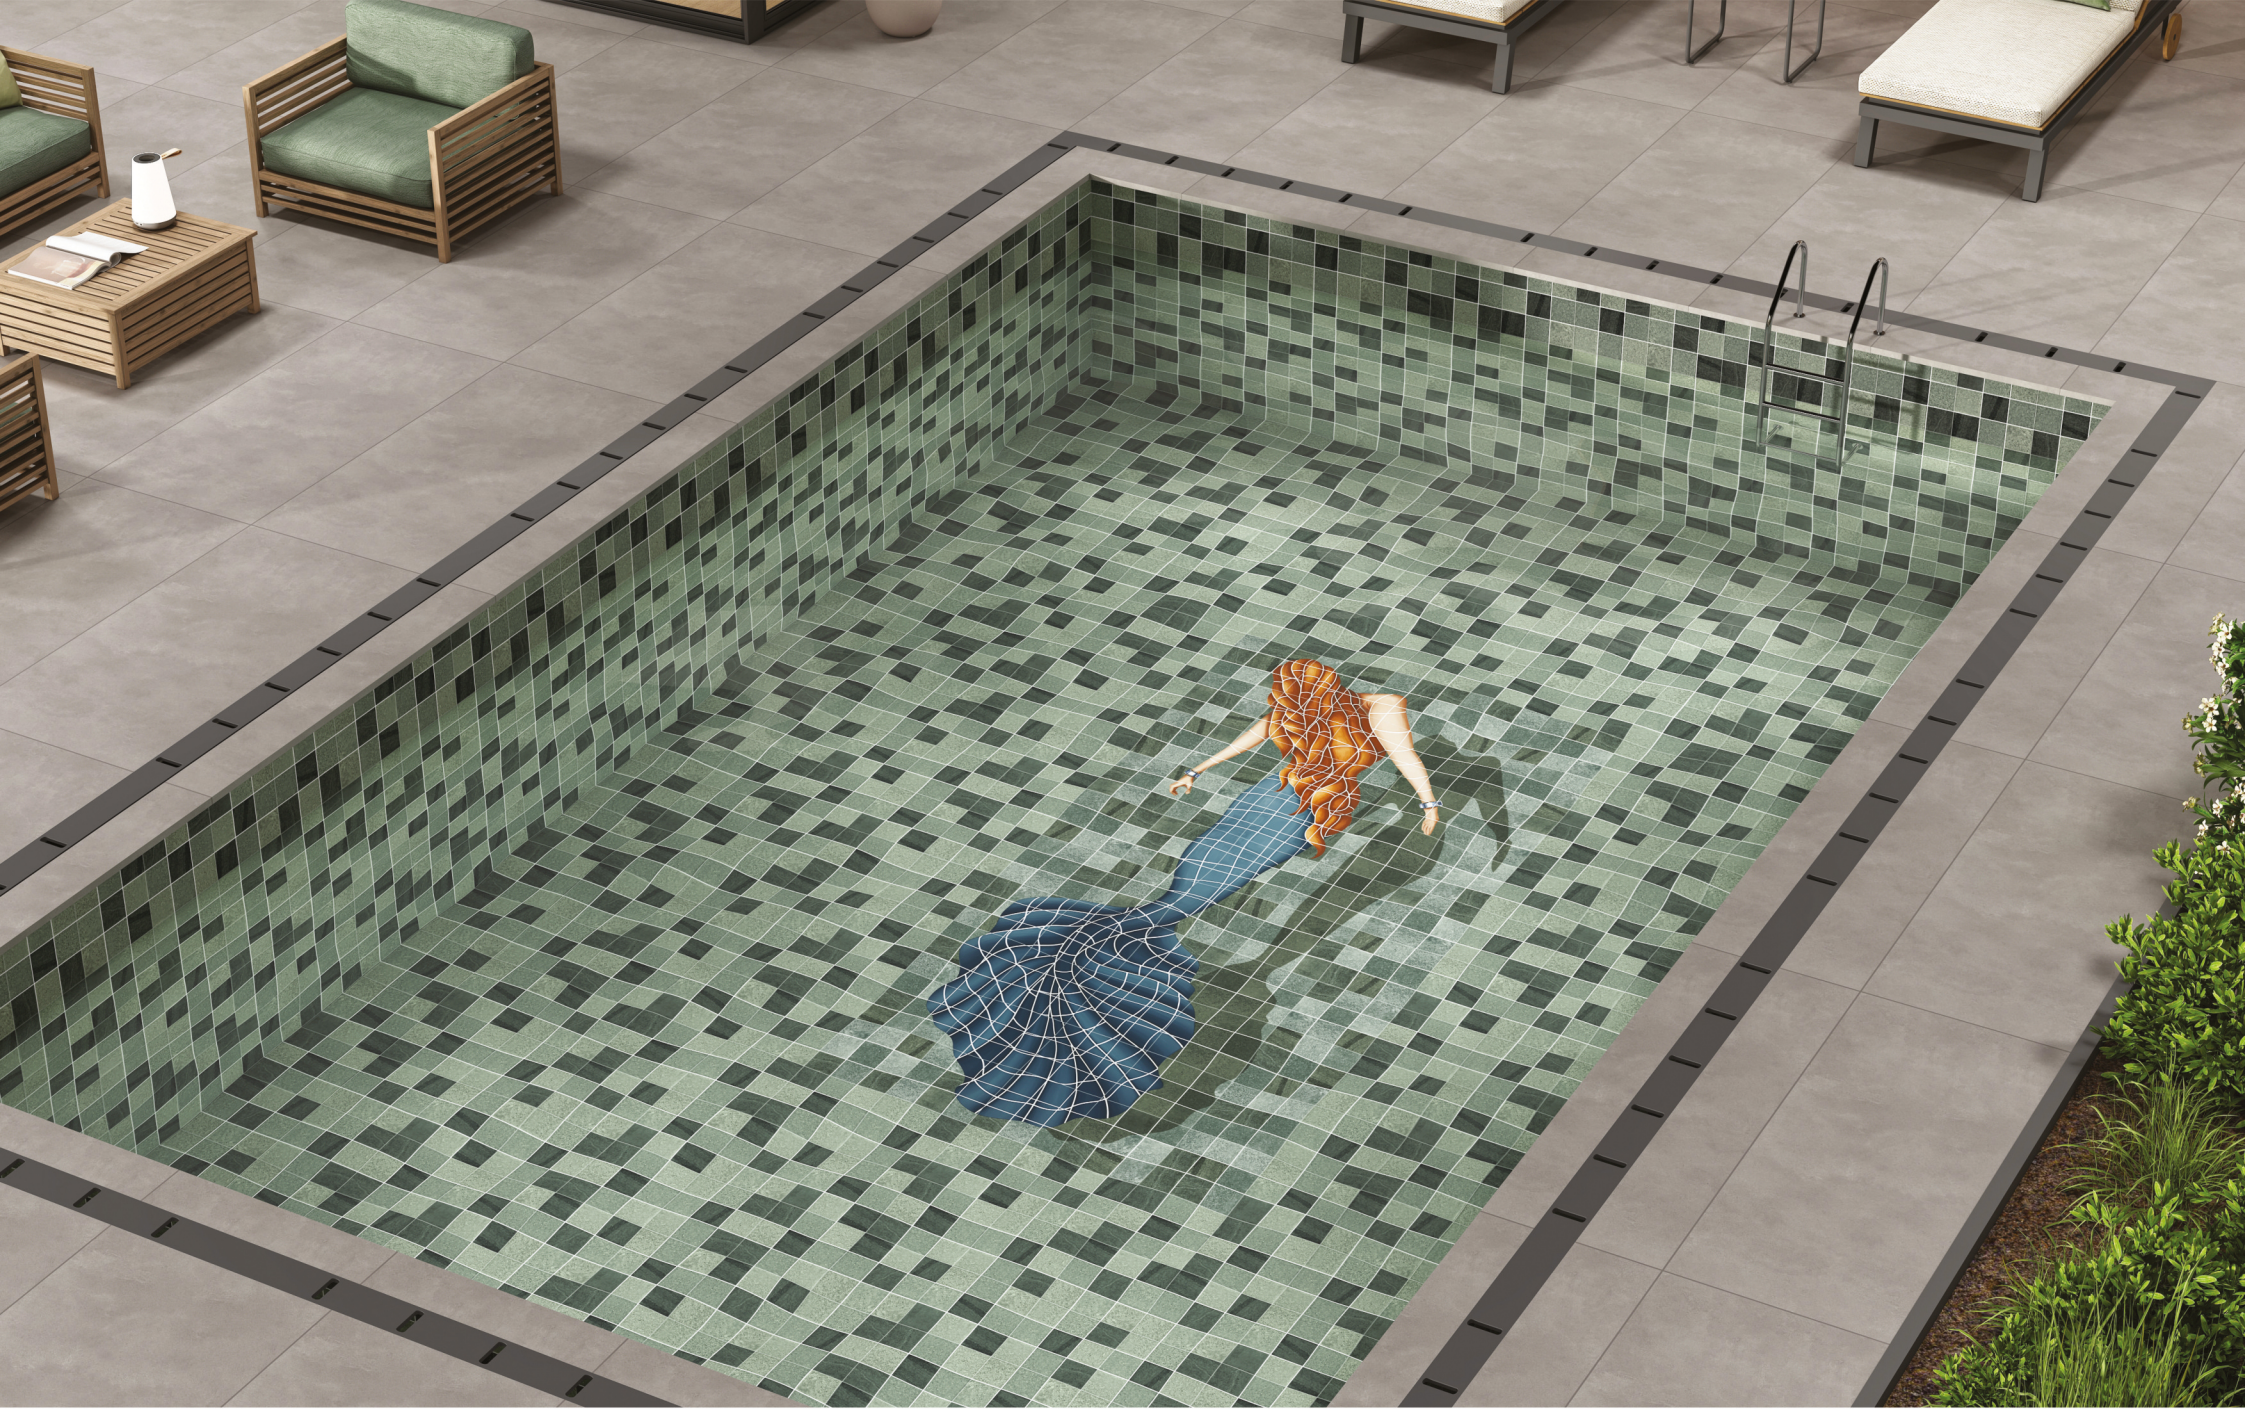

40621 MERMAID | 40621 BASE


MURAL
COLLECTION

(4"X4") 100X100MM
GLAZED PORCELAIN TILES

LOW WATER
ABSORTION E≤0.5%


MATT

8MM

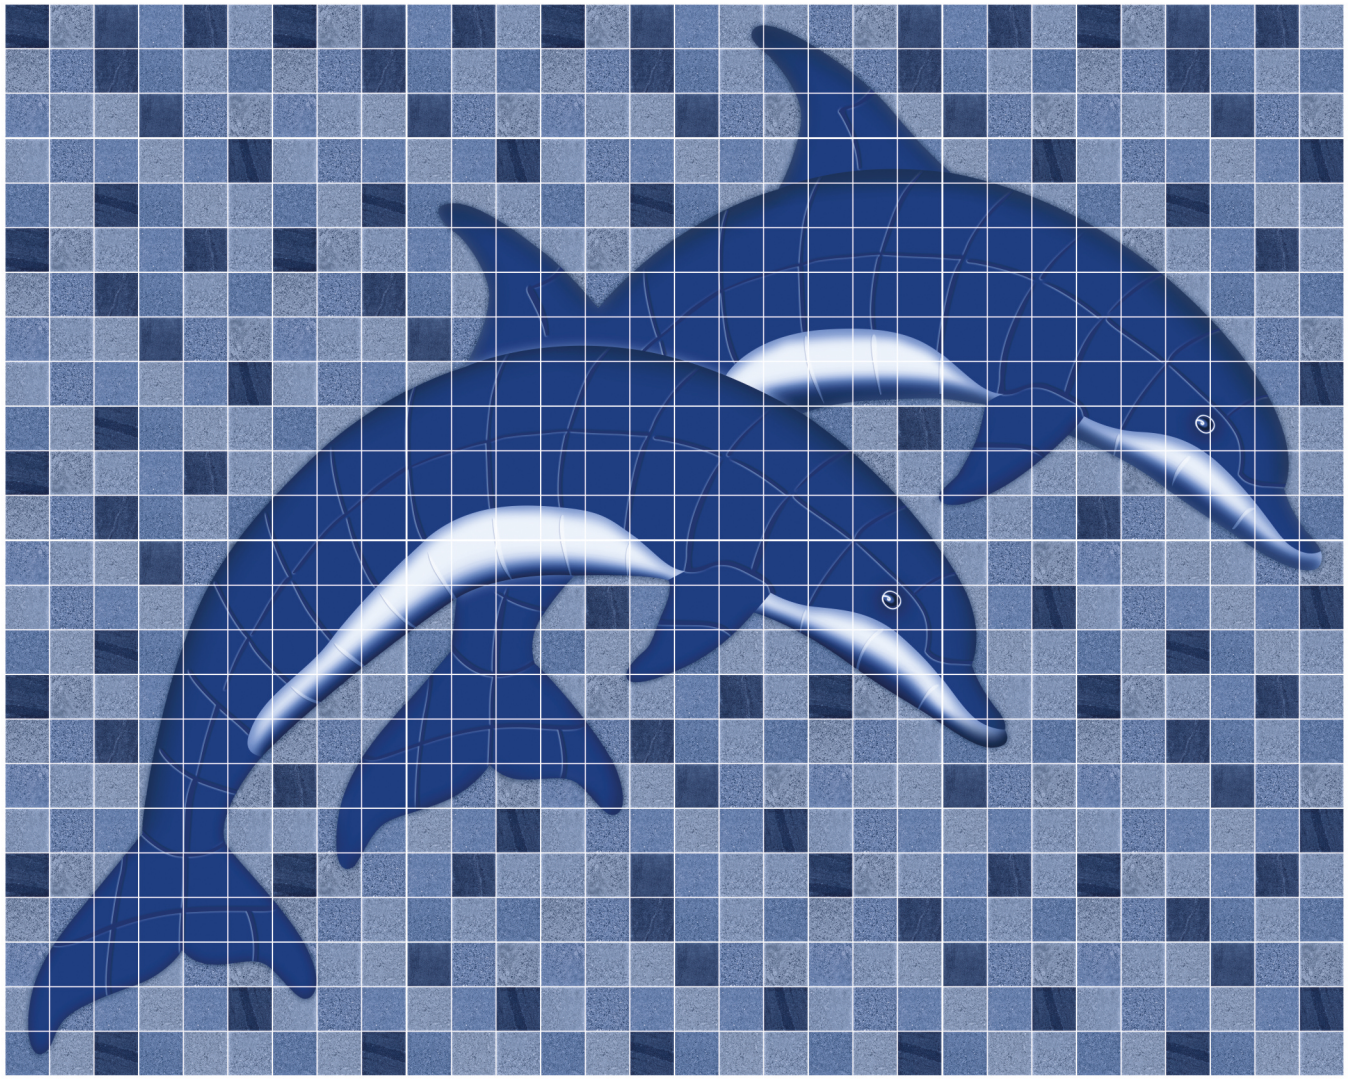

40622 DOLPHINS | 40622 BASE

TOTAL POSTER SIZE : **8**(Length)**X10**(Width) **FEET**

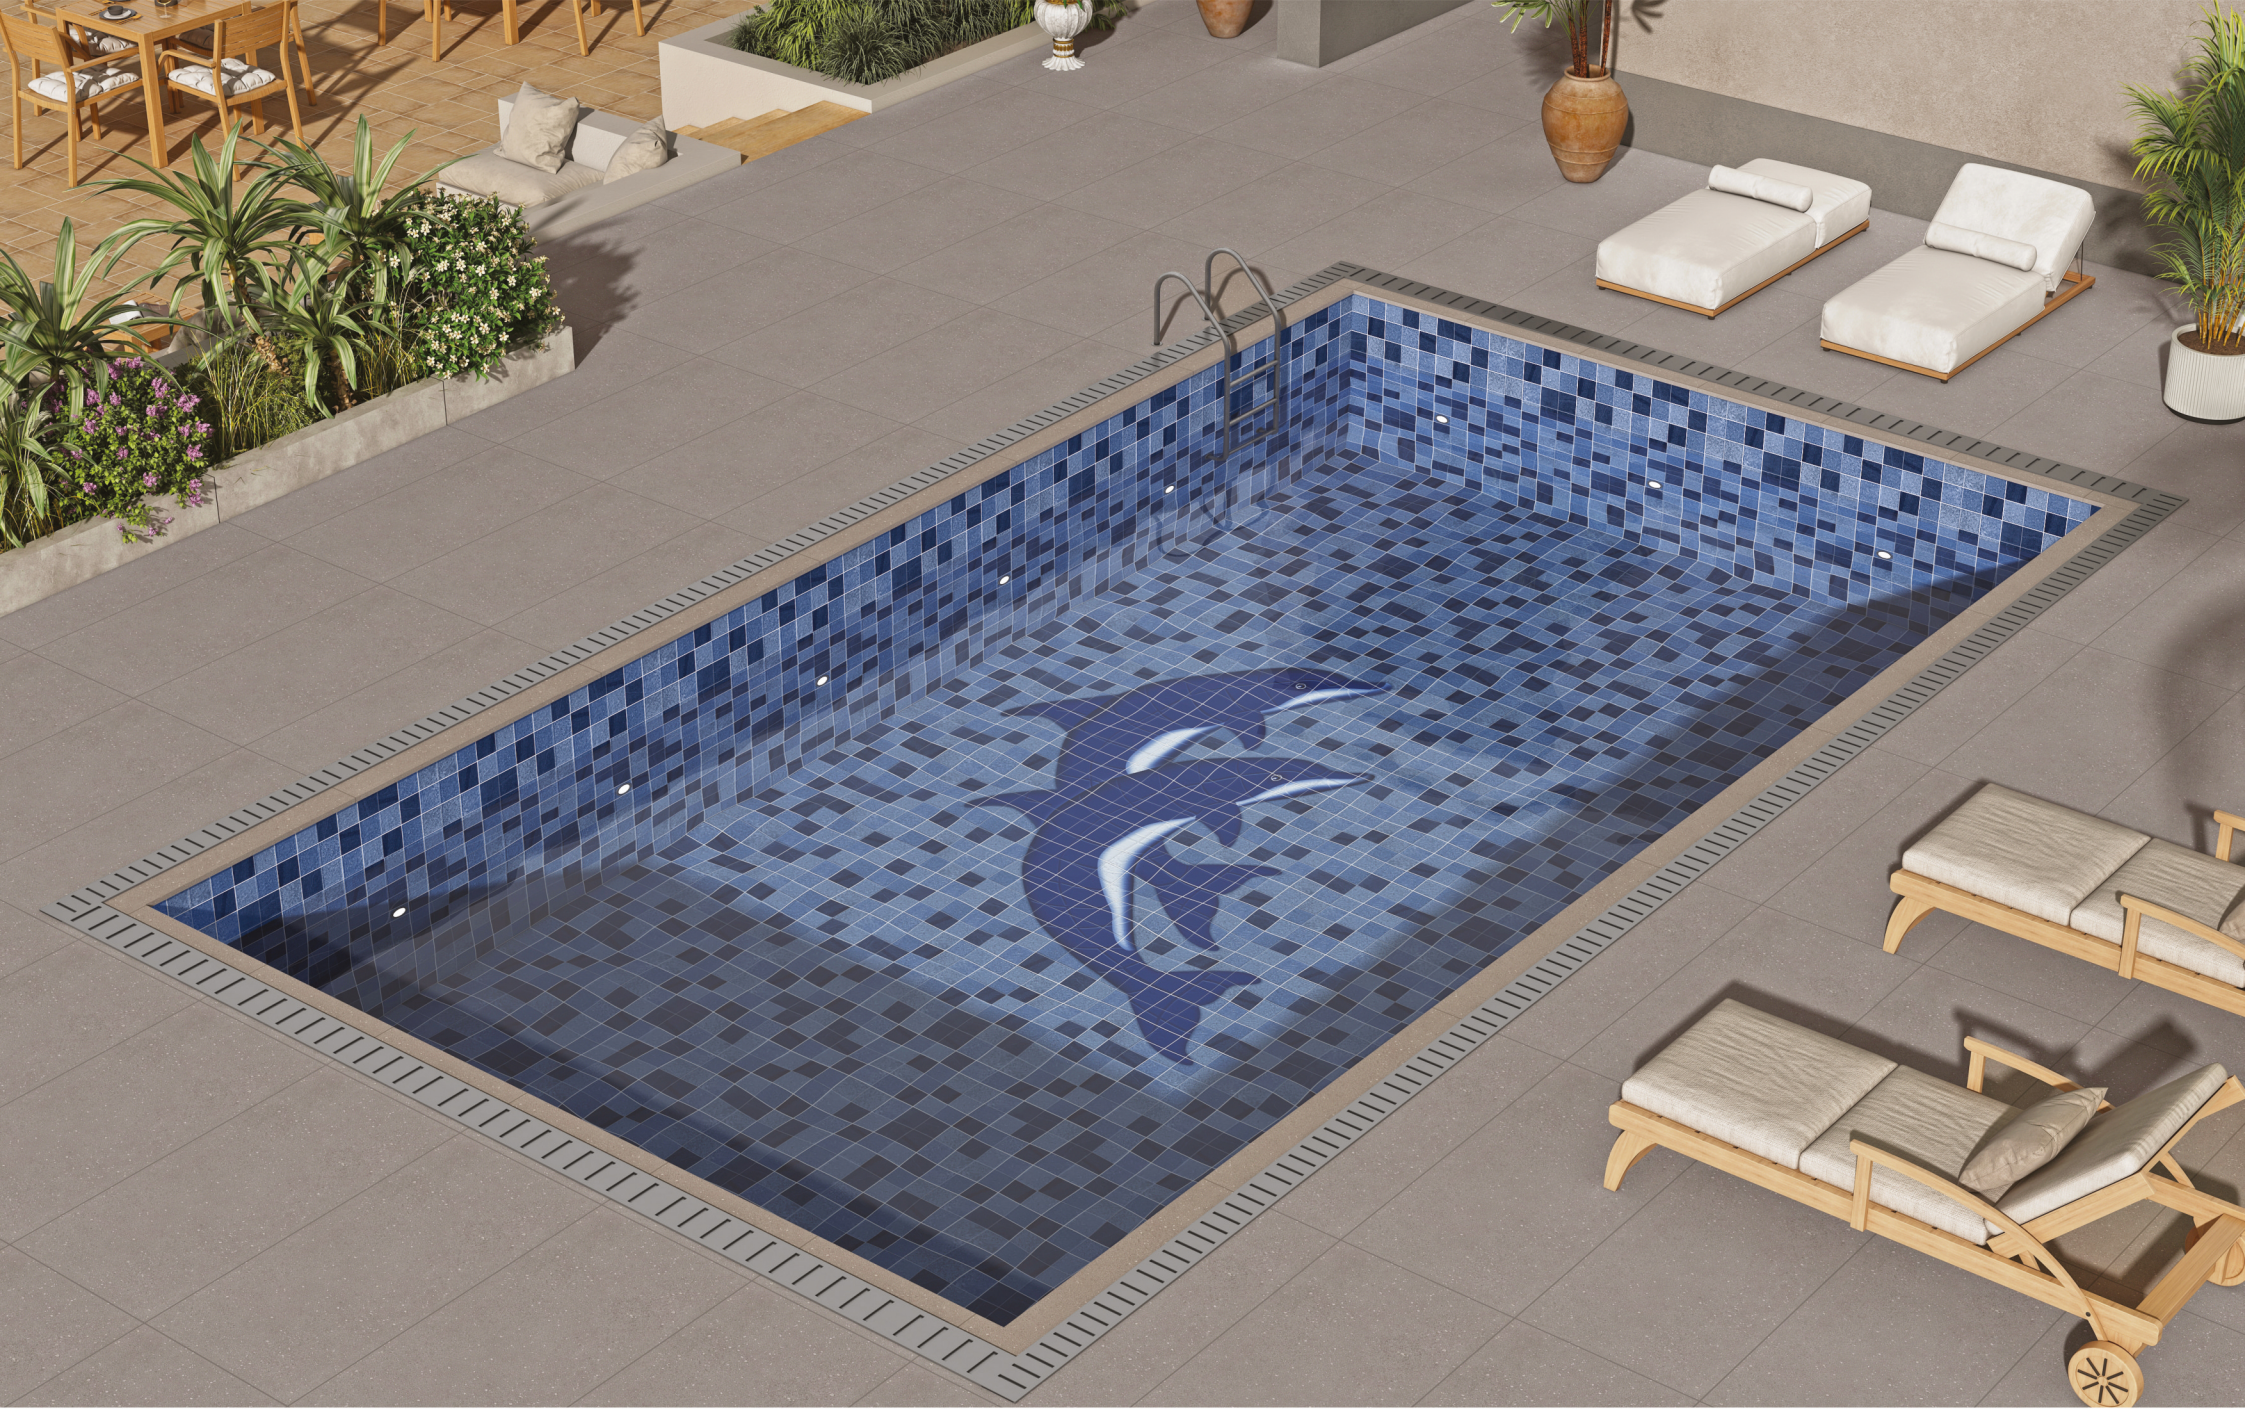

40622 DOLPHINS | 40622 BASE

GLAZED PORCELAIN TILES TECHNICAL SPECIFICATION

Test/Standard	Requirement	Test Result	Test/Standard	Requirement	Test Result
Length / Width EN ISO 10545-2	± 0.6% ≤ ± 2mm	**Pass**	**Modulus of Rupture** EN ISO 10545-4	Min. 35N/mm²	**≥ 35N/mm²**
Thickness EN ISO 10545-2	± 5% ≤ ± 0.5mm	**Pass**	**Thermal Shock** EN ISO 10545-9	Pass	**Pass**
Straightness of Side EN ISO 10545-2	± 0.5% ≤ ± 1.5mm	**Pass**	**Frost Resistance** EN ISO 10545-12	Resistant	**Resistant**
Rectangularity EN ISO 10545-2	± 0.5% ≤ ± 2mm	**Pass**	**Chemical Resistance** EN ISO 10545-13	Min. Class B	**Class A**
Surface Flatness EN ISO 10545-2	± 0.5% ≤ ± 0.5mm	**Pass**	**Stain Resistance** EN ISO 10545-14	Min. Class 3	**Pass**
Water Absorption EN ISO 10545-3	≤ 0.5%	**≤ 0.5%**	**Fire Rating**	-	**Class A I $_{FL}$ Non Combustible**

PACKAGING DETAILS

SIZE	TEXTURE	THICKNESS	PIECES/BOX	SQM./BOX	SQFT./BOX	KG/BOX
100X100MM	PUNCH	8.00MM	70	0.70	7.53	13.00

SHEET SIZE	TEXTURE	THICKNESS	PIECES/NET	SHEET/BOX	SQM./BOX	SQFT./BOX	KG/BOX
306X306MM	PUNCH	8.00MM	9	9	0.84	9.04	15.00

Note :

- Size / shade variation is inherent in porcelain tiles , in case of any complain its should be brought to our dealer's notice before laying the tiles.
- Colour shown are indicative only. Check actual tiles for exact colour.
- The information contained in this catalogue are accurate as possible, but cannot be considered as legally binding.
- Customers are advised to inspect a sample of the tile before ordering.
- The company reserves the right to change the specifications without prior notice.

TILE FIXING INSTRUCTIONS

It is necessary to use an appropriate adhesive and grouting material for each product An initial approach must be made before starting the installation and take into account the type of joint, structural, perimeter, expansion and installation that must be used for each use. We advise that to obtain an optimal result a 3 mm joint should be used

Once the placement is finished: it is recommended to remove the remains of adhesive material and specific grouting for each material, following the manufacturer's instructions for these products.

In general, powder detergents and aggressive scouring pads should not be used for cleaning. It is enough to clean the tiles with a sponge, warm water and a neutral liquid soap. Finally, rinse with clean water.



360 DEGREE INTEGRATED APPROACH FOR CUSTOMIZATION MURAL PROJECTS

Every project that we do involves a 360° approach of workmanship without which the art remains just a product.

1. **Project Layout**
   Every project starts with understanding the layout of the area where the pool tiles needs to be installed. It can be provided simply in form of a sketch with dimensions.
2. **Design Inspiration**
   The next step is to identify the design. It can be selected either from the exclusive range of mural catalogue or can be custom made referring from any inspiration - a digital image file, a photograph, a sketch.
3. **Presentation**
   The design along with the project layout then moves to our Studio wherein our inhouse designers work with thousands of tiles tesserae, then they will create presentation for our customer's approval.
4. **Design Production**
   Upon approval from the customer on the presentation and samples, the design is taken up for production. During design production, the tiles are assembled as per the unique production plan since each project is custom made in respect to size, look and colour of the tile / design space.
5. **Design Execution**
   Every project, holding thousands of tiles tesserae, is assembled and dispatched in multiple of 30x30cm sheets which are carefully numbered. An assembling plan layout is also sent along with the project. This enables a simpler and quicker installation.

CHECK POINTS

1. Measure the floor area of the swimming pool and confirm that the length and width are greater than the size of the mural selected from the brochure before placing or dispatching the order.
2. Once the order is received at the site, please confirm that all mural boxes have been received in sequence as per the mural design. (Example: The Mermaid mural will have 5 boxes numbered M1 to M5, each box containing 10 nets. The Dolphin mural will have 8 boxes numbered D1 to D8, each box containing 10 nets.)
3. Please ensure that you have received the complete mural layout in both PDF format and a hard copy poster format, which is dispatched along with the mural order materials.
4. Do not start laying the mural vertically, as the tile sheets are packed in boxes according to the horizontal laying method. If any confusion or misunderstanding occurs during the installation of the mural design, kindly contact our coordinator to clarify your queries.

STEPS TO INSTALL MURAL DESIGN IN SWIMMING POOL

Step 1 :
First, mark the reference lines and create sufficient space equal to the size of the mural that needs to be installed in the pool.

Step 2 :
After confirming that you have received all the boxes for the selected mural in proper numerical order, open each box accordingly. Each box contains 10 nets, which correspond to one row of the mural.
For example, the first box contains all the nets for the first row. Each net has a number marked on the backside, which matches the number mentioned in the mural layout PDF or poster provided.

Step 3 :
After laying the nets from the first box (covering the first row of the mural), follow the same method for the second box to complete the second row. Continue this process sequentially for all boxes in numerical order.