RIOS
COLLECTION

SWIMMING POOL TILES
100x100mm | 4"x4"




Aqualuxe
Splash with Serene Style



RIOS
COLLECTION

Witness a range of designs in this collection. There are 10 different designs and shades in a glossy finish that truly enrich your swimming experience and giving a top resort like feel.

306X306MM
AVAILABLE IN NET
(9 PCS)




100X100MM






Sizzling
Pick

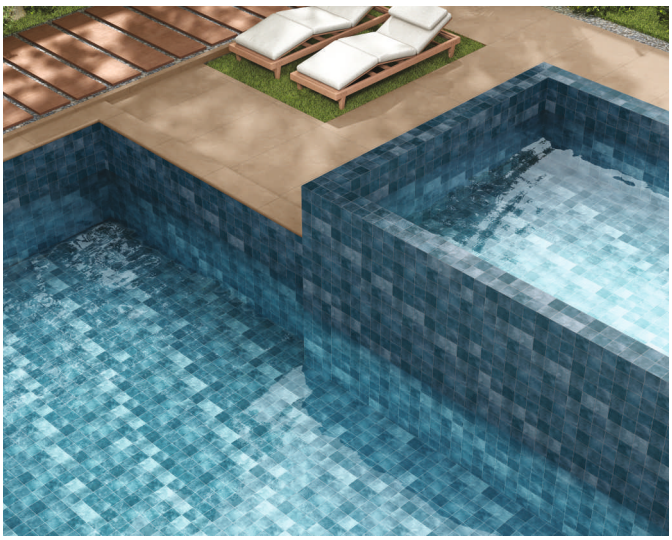


Spectacular
Beauty

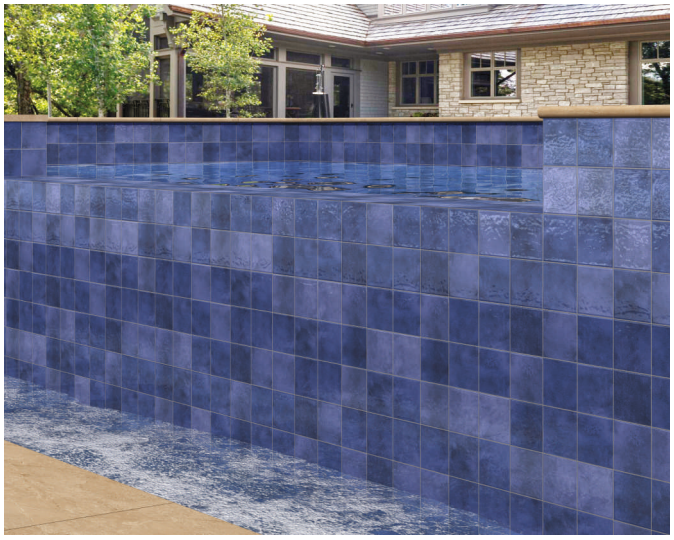

Ravishing
Retreat



Outstanding
Vibe

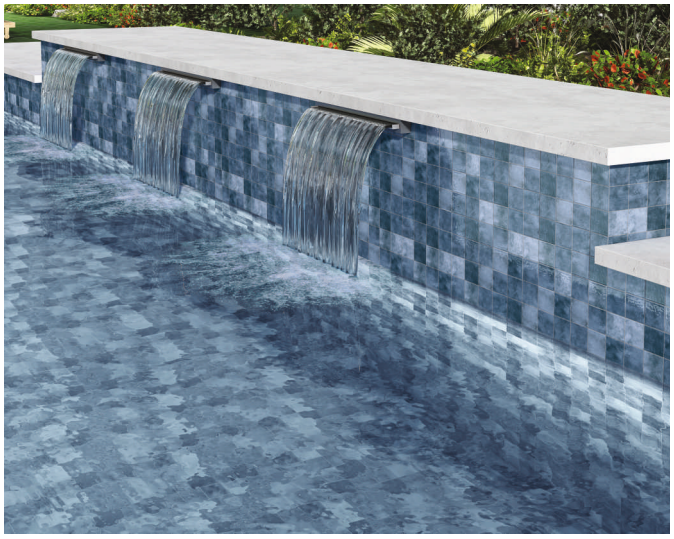

Sensational
Shade




Relaxing
Oasis



40011 RIOS ALPINE BLUE




40012 RIOS SKY BLUE

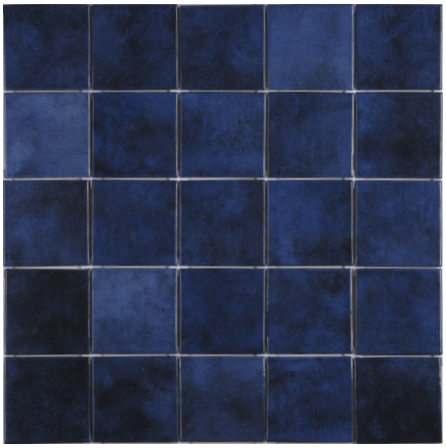


40013 COBALT BLUE



40014 RIOS SPACE BLUE

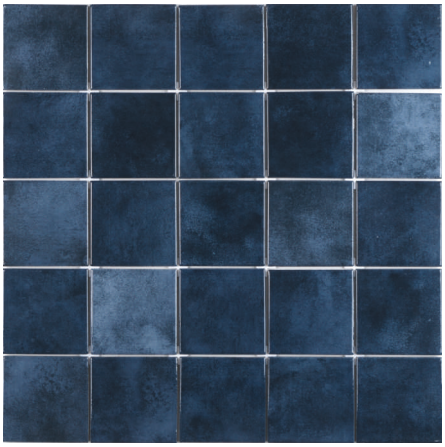

40015 RIOS PRUSSIAN BLUE

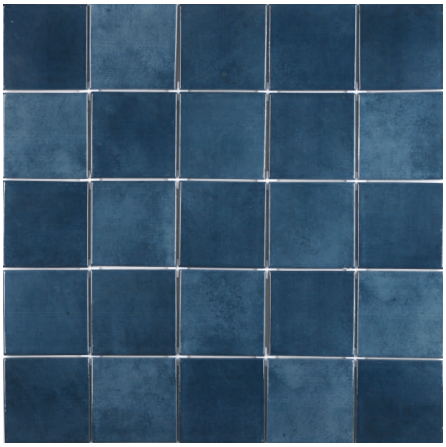


40016 RIOS LAKE AQUA BLUE




40017 RIOS AQUA SEA



40018 RIOS AQUA MARINE

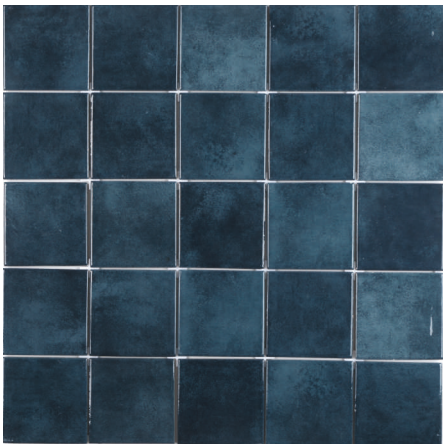

40019 RIOS CRYPTIE AQUA

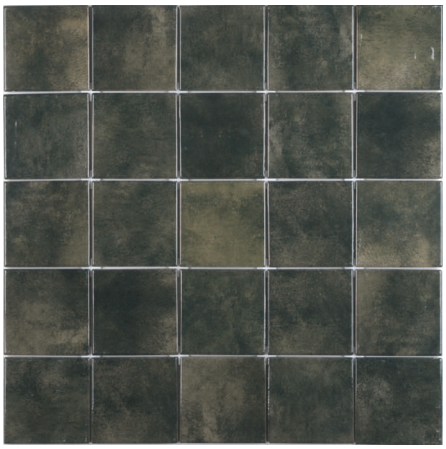

40020 RIOS FOREST GREEN

RIOS
COLLECTION

100X100MM | 4"X4"
GLAZED PORCELAIN TILES

40011
ALPINE BLUE



PUNCH

GLOSSY

RANDOM

LOW WATER
ABSORTION E≤0.5%



40011 ALPINE BLUE

RIOS
COLLECTION

100X100MM | 4"X4"
GLAZED PORCELAIN TILES

40012
SKY BLUE



PUNCH GLOSSY RANDOM

LOW WATER
ABSORTION E≤0.5%




40012 SKY BLUE

RIOS
COLLECTION


100X100MM | 4"X4"
GLAZED PORCELAIN TILES

40013
COBALT BLUE

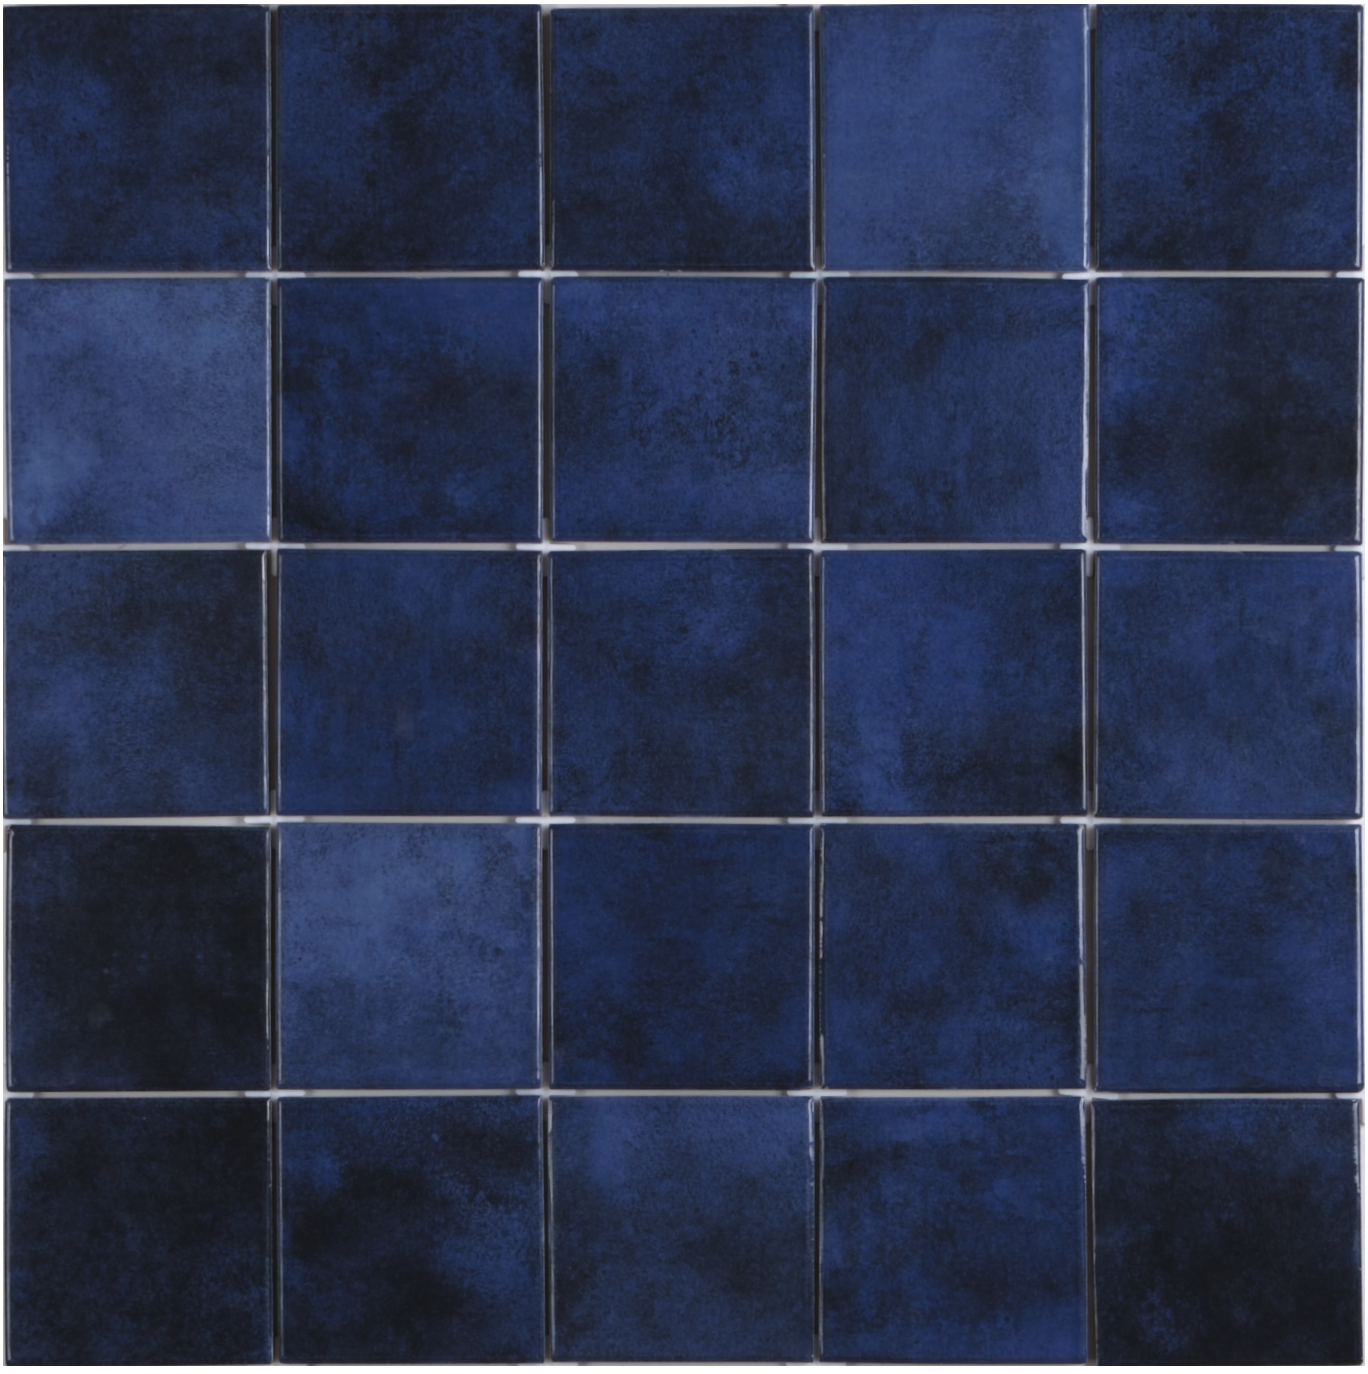

PUNCH GLOSSY RANDOM

LOW WATER
ABSORTION E≤0.5%

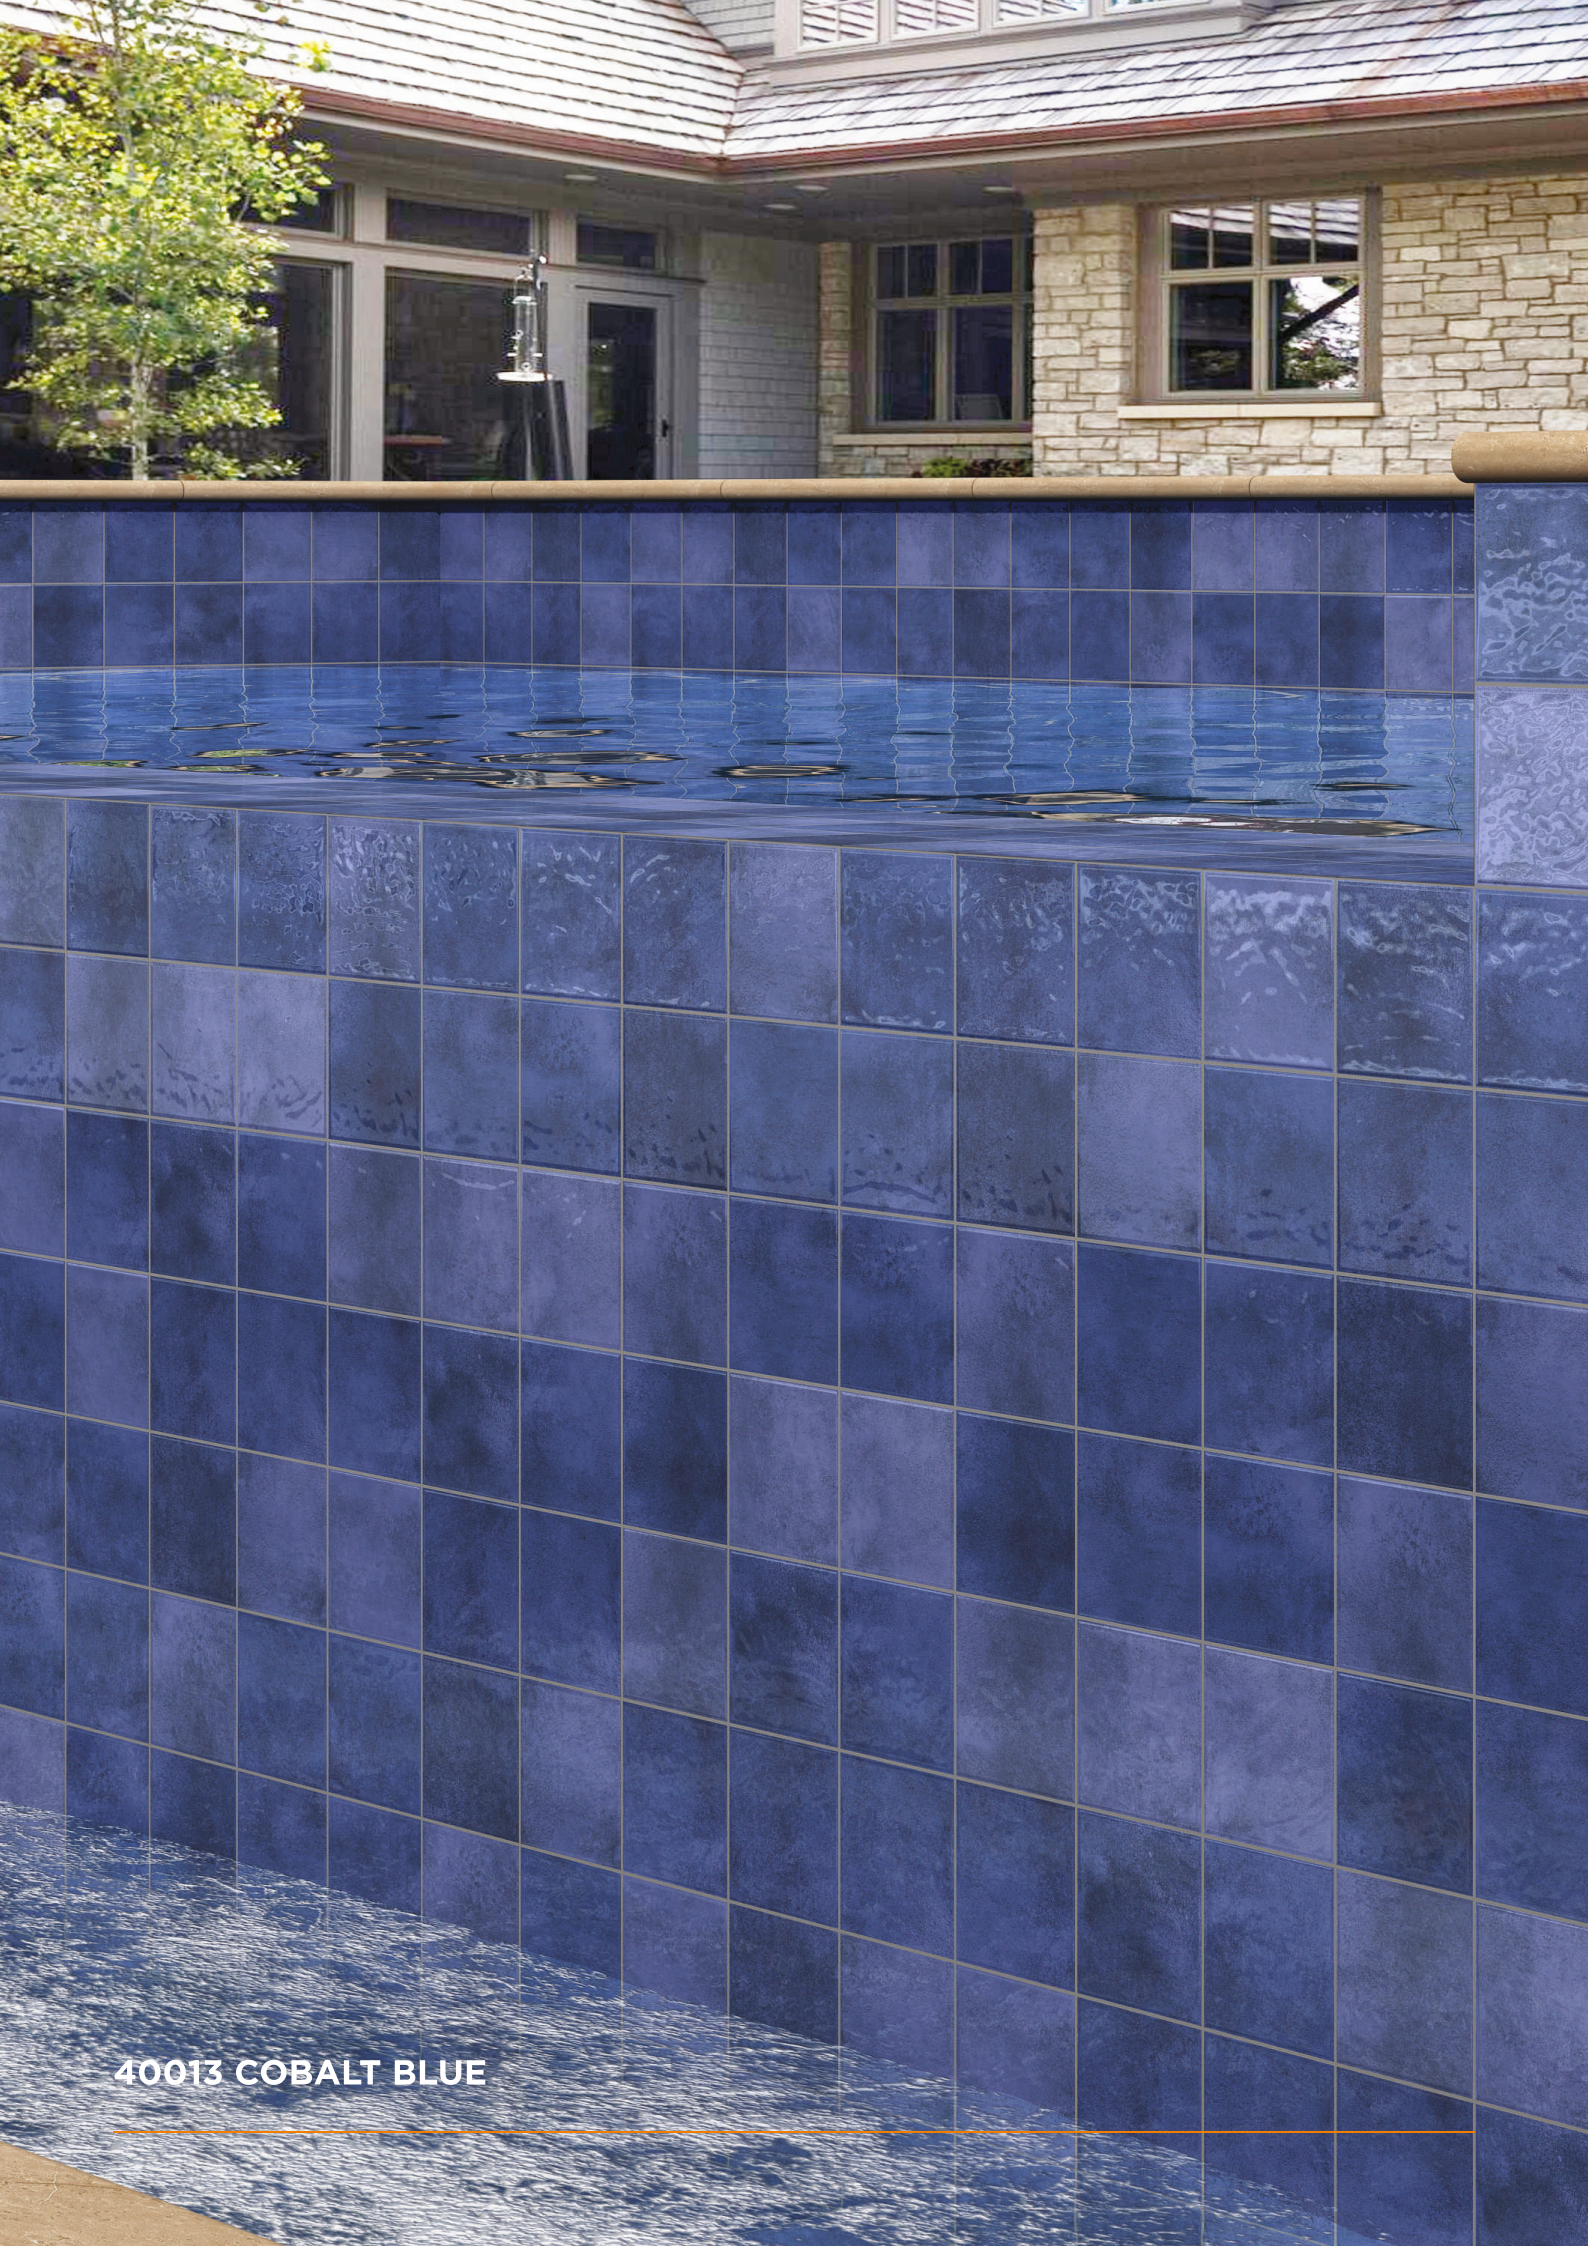


40013 COBALT BLUE

RIOS
COLLECTION

100X100MM | 4"X4"
GLAZED PORCELAIN TILES

40014
SPACE BLUE





PUNCH



GLOSSY



RANDOM

LOW WATER
ABSORTION E≤0.5%




40014 SPACE BLUE

RIOS
COLLECTION


100X100MM | 4"X4"
GLAZED PORCELAIN TILES

40015
PRUSSIAN BLUE

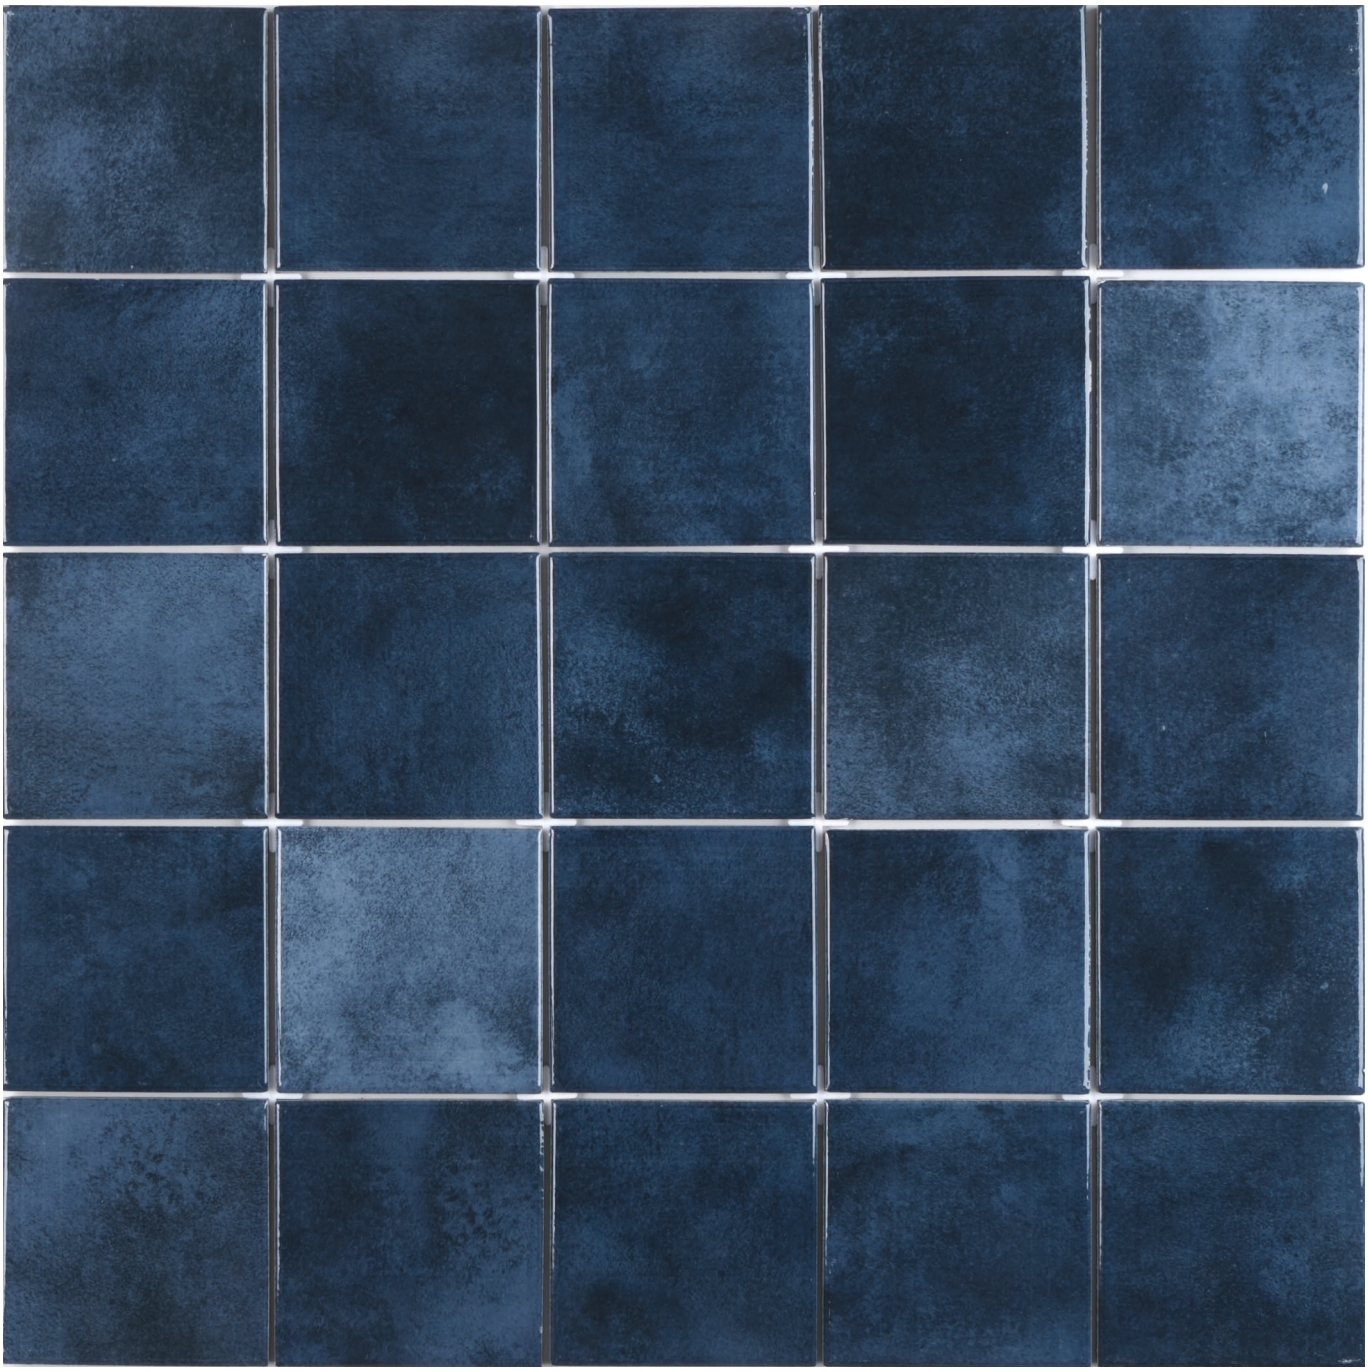

PUNCH GLOSSY RANDOM

LOW WATER
ABSORTION E≤0.5%

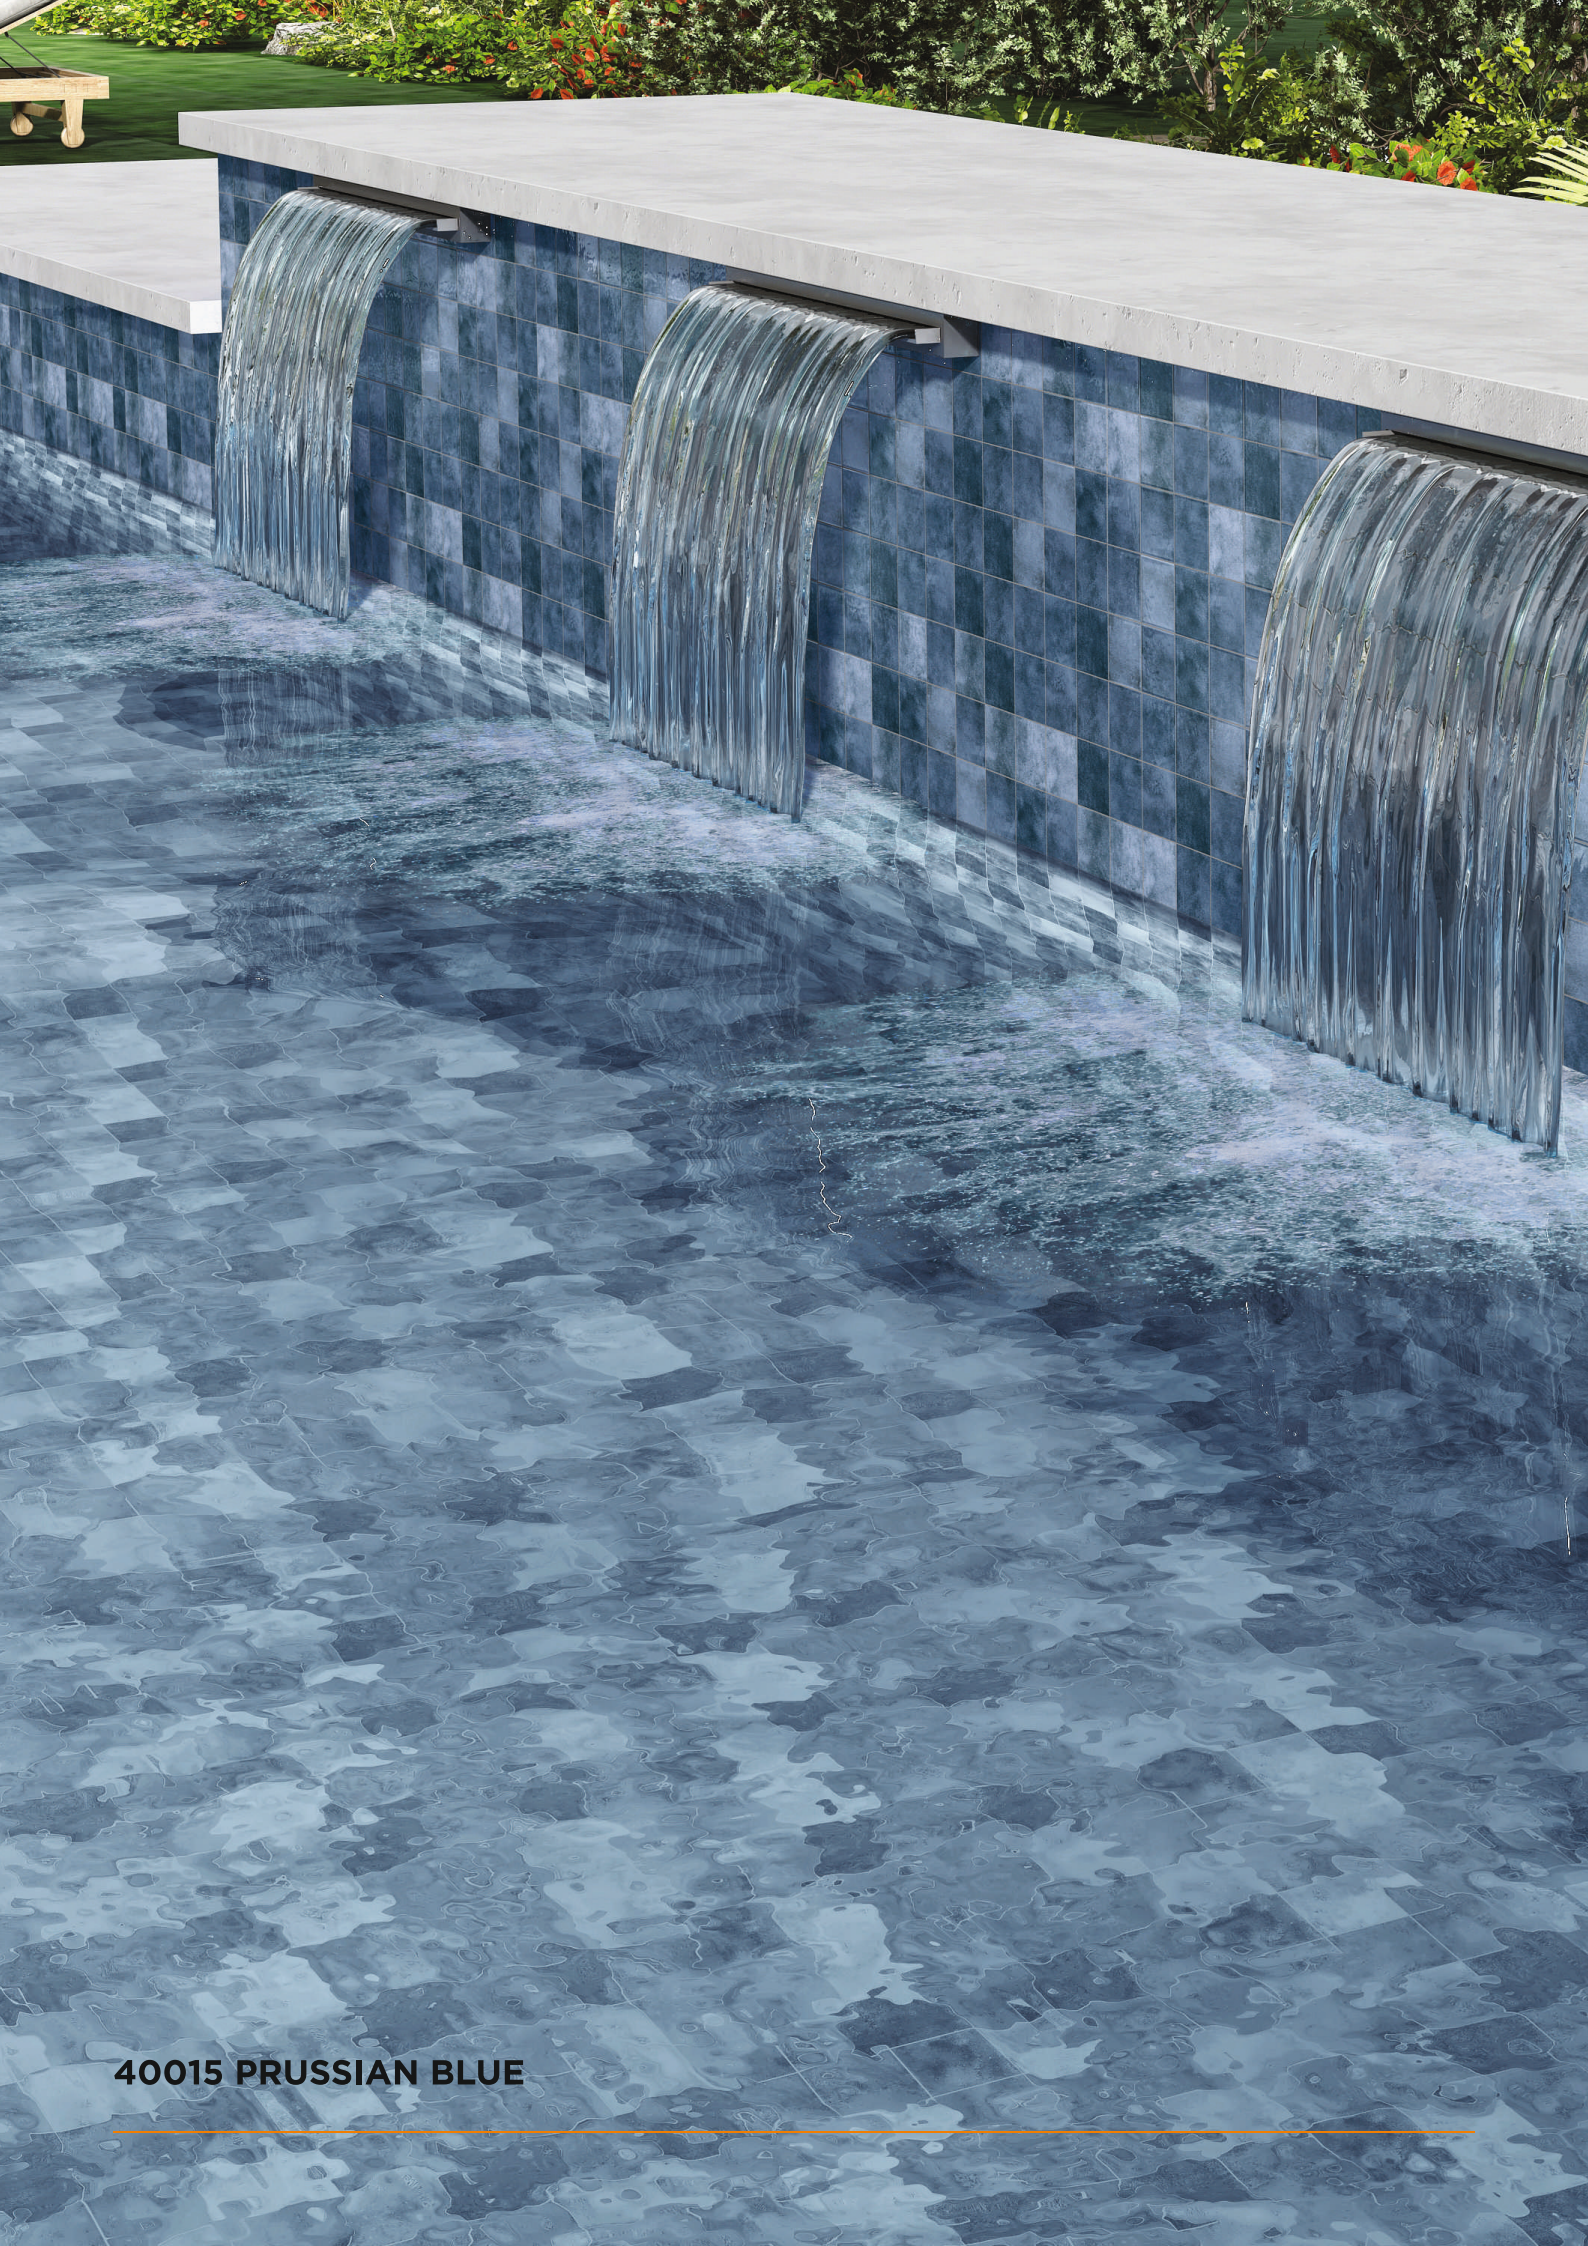


40015 PRUSSIAN BLUE

RIOS
COLLECTION

100X100MM | 4"X4"
GLAZED PORCELAIN TILES

40016
LAKE AQUA BLUE

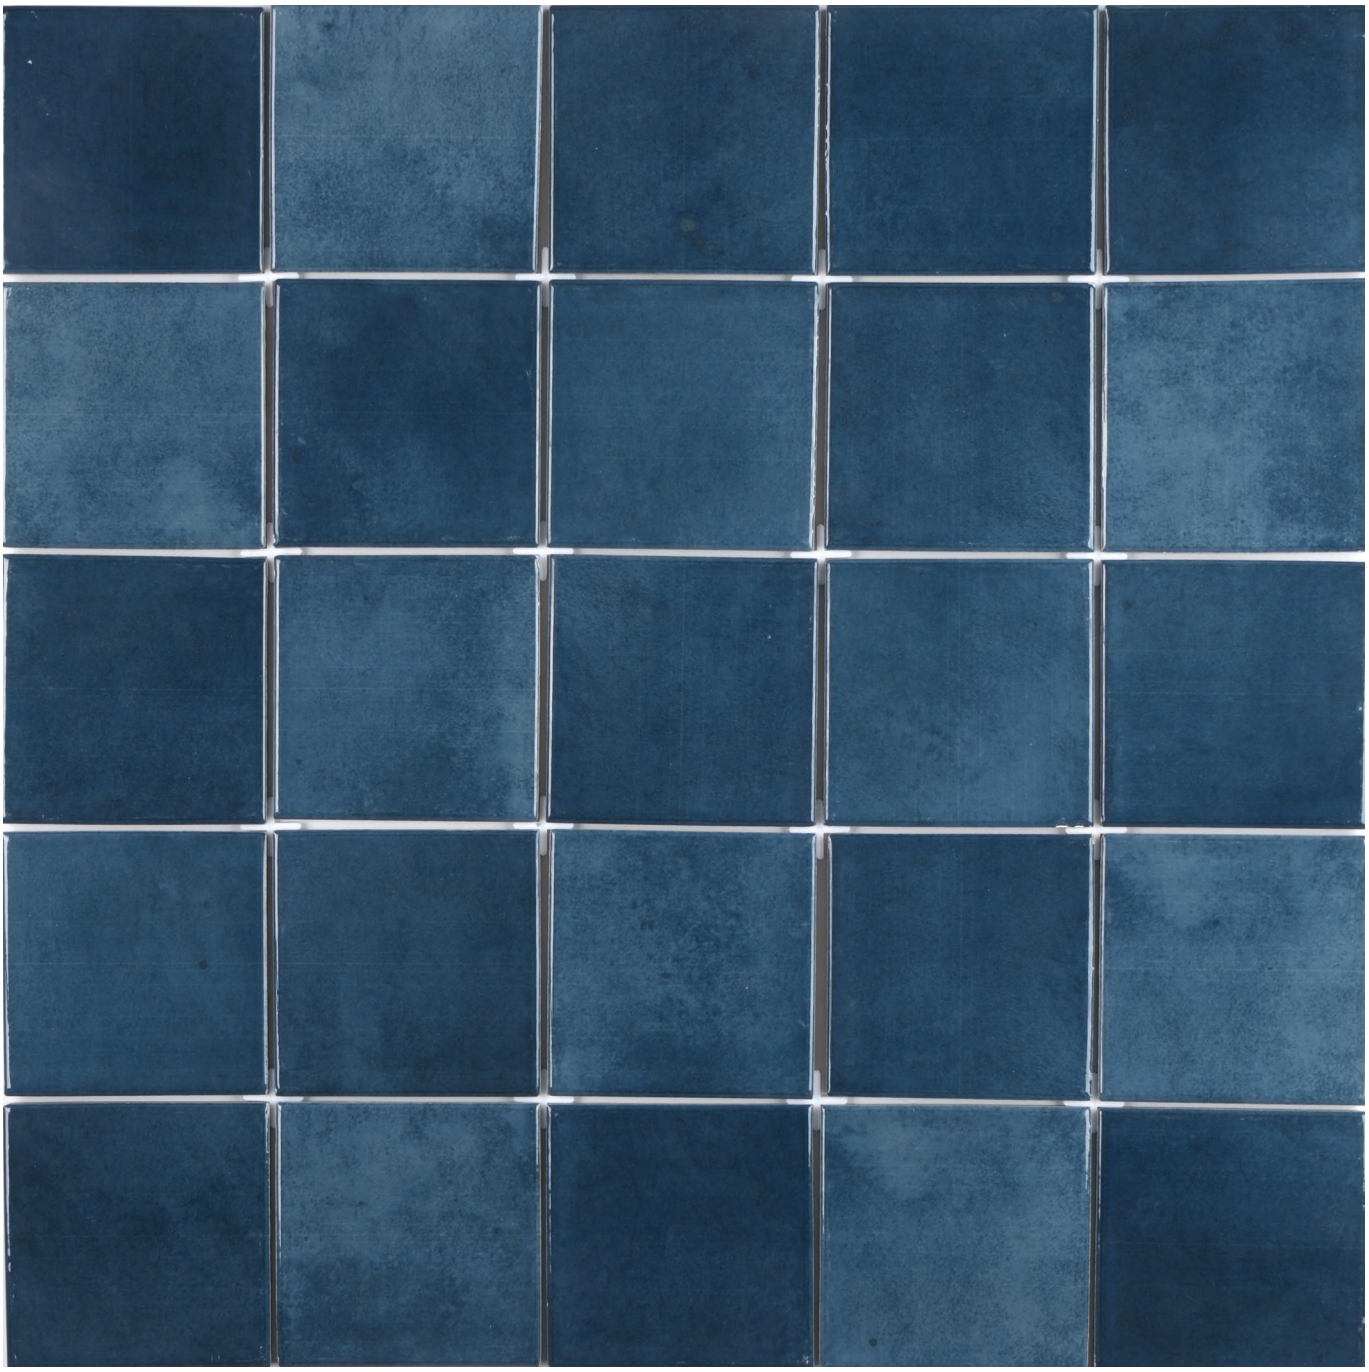

PUNCH GLOSSY RANDOM

LOW WATER
ABSORTION E≤0.5%



40016 LAKE AQUA BLUE

RIOS
COLLECTION

100X100MM | 4"X4"
GLAZED PORCELAIN TILES

40017
AQUA SEA



PUNCH GLOSSY RANDOM

LOW WATER
ABSORTION E≤0.5%



40017 AQUA SEA

RIOS
COLLECTION

100X100MM | 4"X4"
GLAZED PORCELAIN TILES

40018
AQUA MARINE




PUNCH

GLOSSY

RANDOM

LOW WATER
ABSORTION E≤0.5%

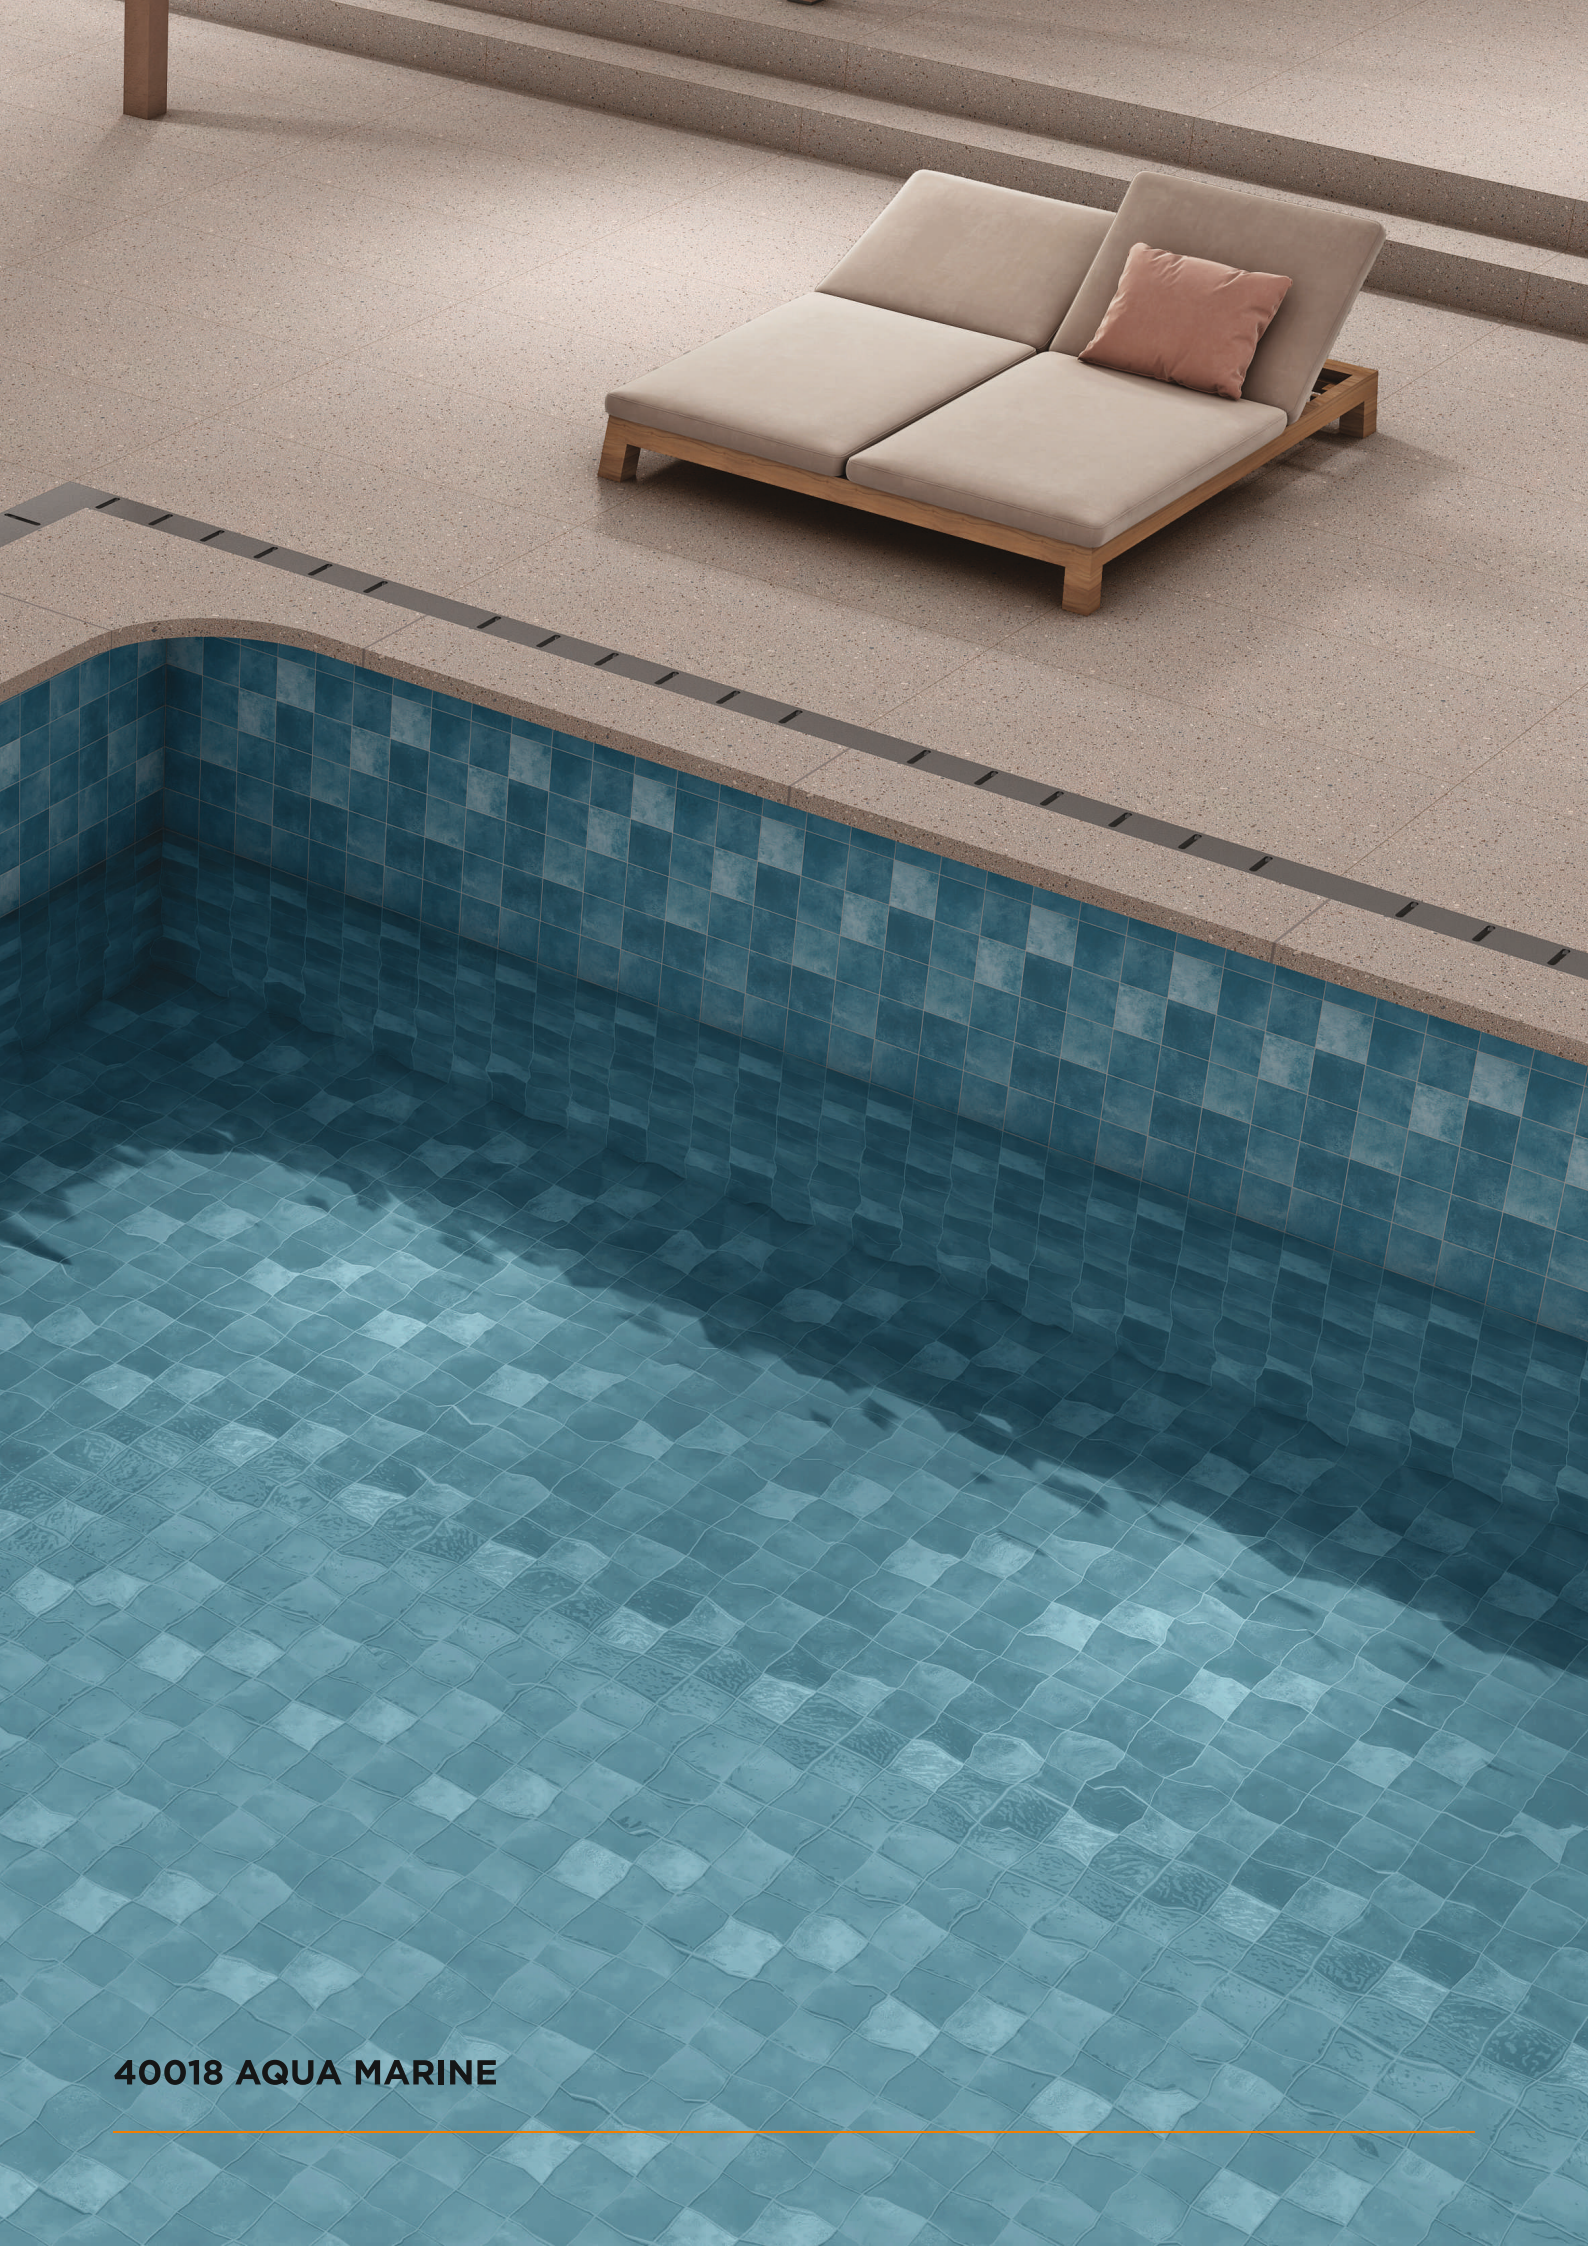


40018 AQUA MARINE

RIOS
COLLECTION

100X100MM | 4"X4"
GLAZED PORCELAIN TILES

40019
CRYPTIE AQUA

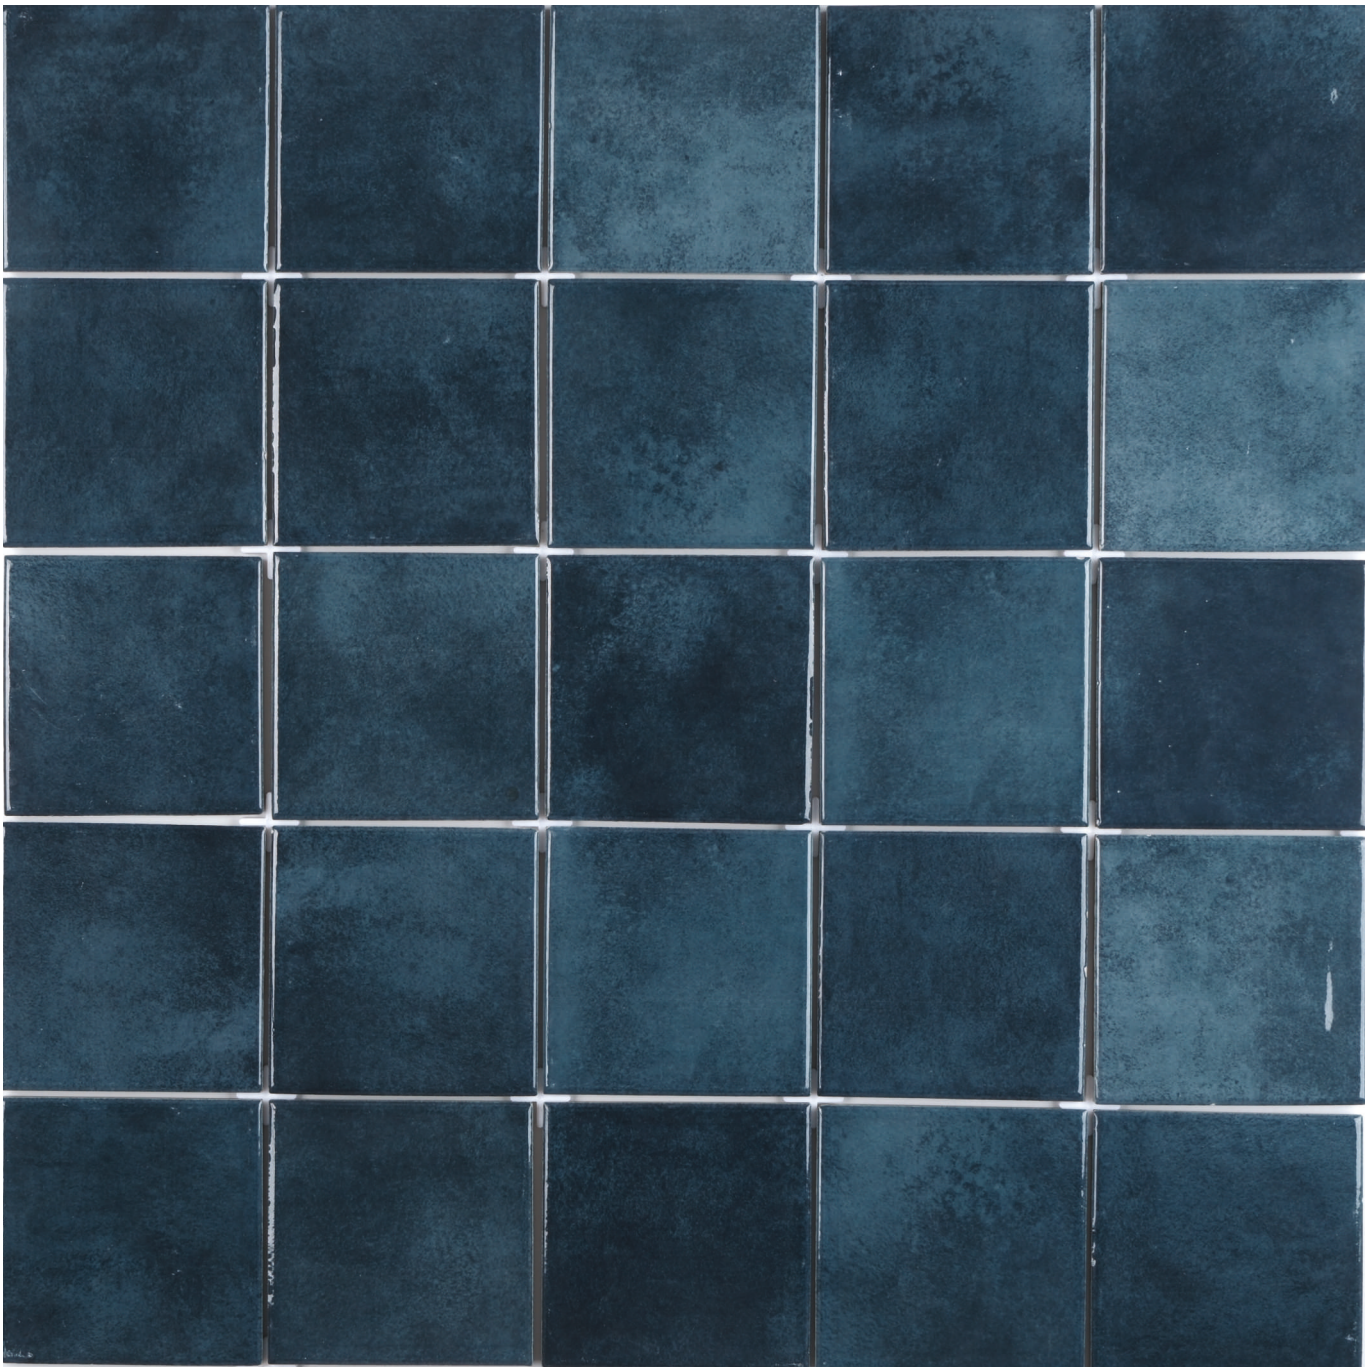

PUNCH GLOSSY RANDOM

LOW WATER
ABSORTION E≤0.5%




40019 CRYPTIE AQUA

RIOS
COLLECTION

100X100MM | 4"X4"
GLAZED PORCELAIN TILES

40020
FOREST GREEN

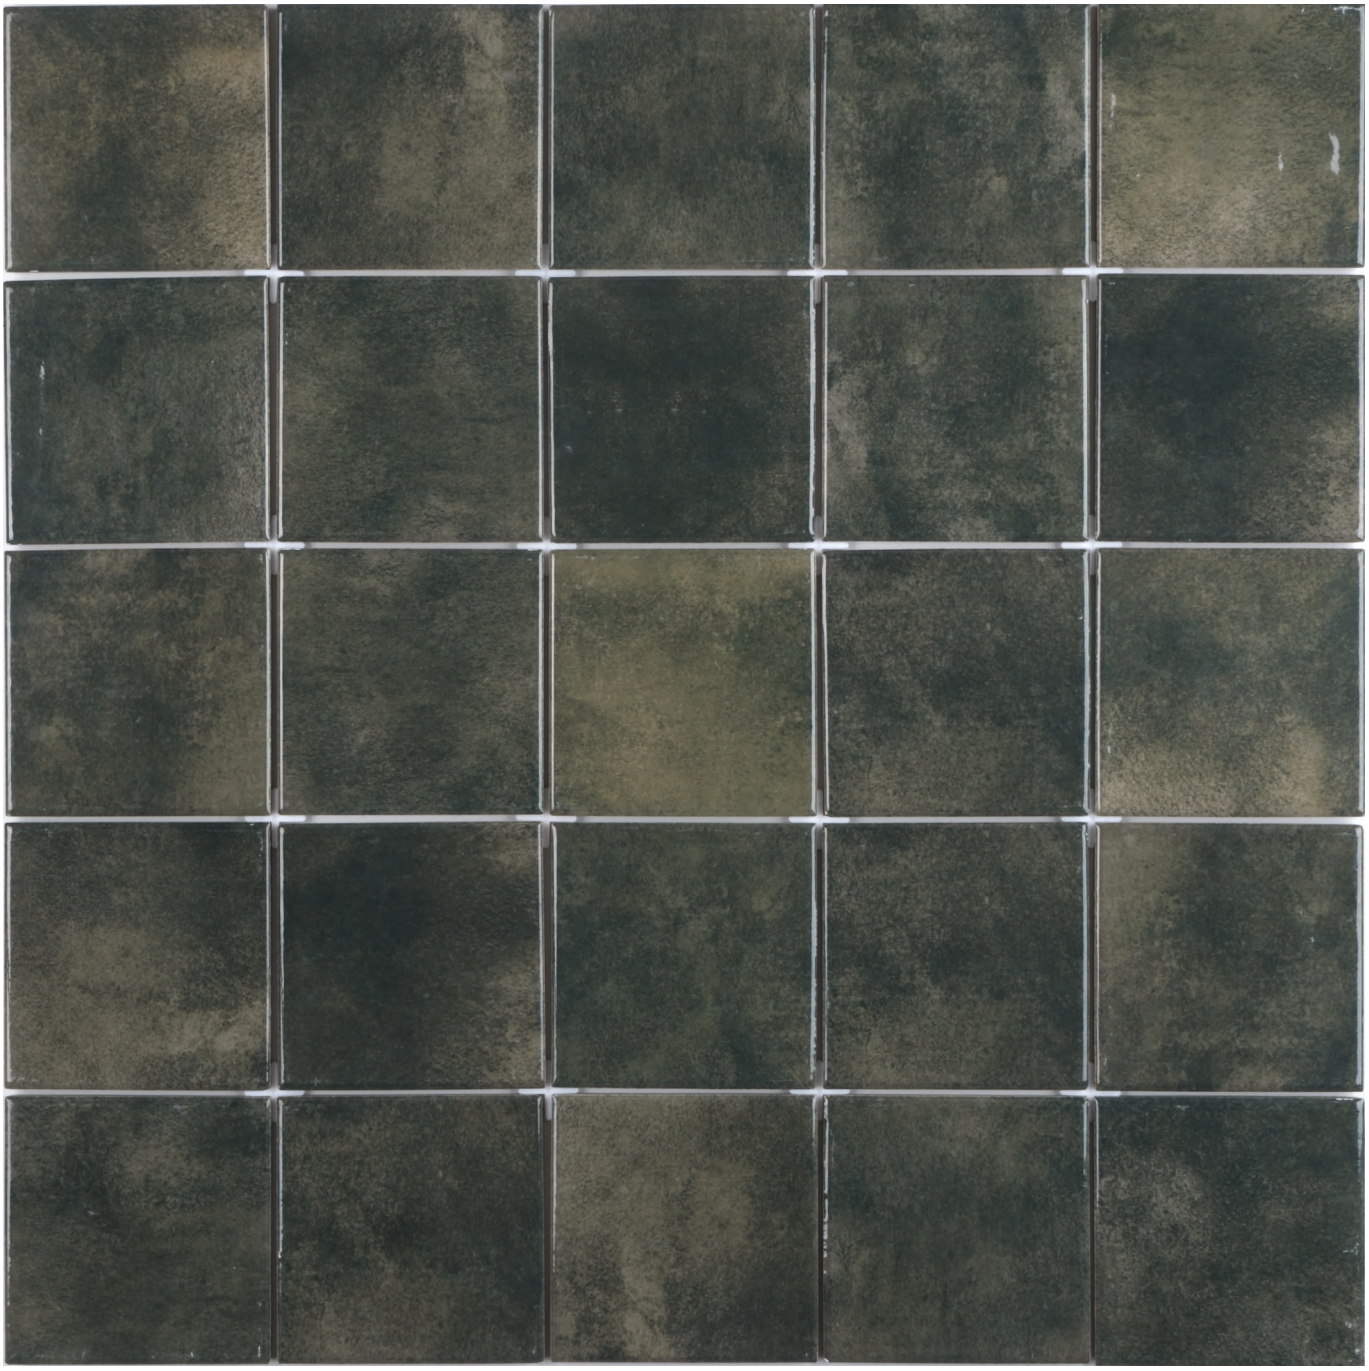

PUNCH GLOSSY RANDOM

LOW WATER
ABSORTION E≤0.5%



40020 FOREST GREEN

GLAZED PORCELAIN TILES TECHNICAL SPECIFICATION

Test/Standard	Requirement	Test Result	Test/Standard	Requirement	Test Result
Length / Width EN ISO 10545-2	± 0.6% ≤ ± 2mm	**Pass**	**Modulus of Rupture** EN ISO 10545-4	Min. 35N/mm²	**≥ 35N/mm²**
Thickness EN ISO 10545-2	± 5% ≤ ± 0.5mm	**Pass**	**Thermal Shock** EN ISO 10545-9	Pass	**Pass**
Straightness of Side EN ISO 10545-2	± 0.5% ≤ ± 1.5mm	**Pass**	**Frost Resistance** EN ISO 10545-12	Resistant	**Resistant**
Rectangularity EN ISO 10545-2	± 0.5% ≤ ± 2mm	**Pass**	**Chemical Resistance** EN ISO 10545-13	Min. Class B	**Class A**
Surface Flatness EN ISO 10545-2	± 0.5% ≤ ± 0.5mm	**Pass**	**Stain Resistance** EN ISO 10545-14	Min. Class 3	**Pass**
Water Absorption EN ISO 10545-3	≤ 0.5%	**≤ 0.5%**	**Fire Rating**	-	**Class A I $_{FL}$ Non Combustible**

PACKAGING DETAILS

SIZE	TEXTURE	THICKNESS	PIECES/BOX	SQM./BOX	SQFT./BOX	KG/BOX
100X100MM	PUNCH	8.00MM	70	0.70	7.53	13.00

SHEET SIZE	TEXTURE	THICKNESS	PIECES/NET	SHEET/BOX	SQM./BOX	SQFT./BOX	KG/BOX
306X306MM	PUNCH	8.00MM	9	9	0.84	9.04	15.00

Note :

- Size / shade variation is inherent in porcelain tiles , in case of any complain its should be brought to our dealer's notice before laying the tiles.
- Colour shown are indicative only. Check actual tiles for exact colour.
- The information contained in this catalogue are accurate as possible, but cannot be considered as legally binding.
- Customers are advised to inspect a sample of the tile before ordering.
- The company reserves the right to change the specifications without prior notice.

TILE FIXING INSTRUCTIONS

It is necessary to use an appropriate adhesive and grouting material for each product An initial approach must be made before starting the installation and take into account the type of joint, structural, perimeter, expansion and installation that must be used for each use. We advise that to obtain an optimal result a 3 mm joint should be used

Once the placement is finished: it is recommended to remove the remains of adhesive material and specific grouting for each material, following the manufacturer's instructions for these products.

In general, powder detergents and aggressive scouring pads should not be used for cleaning. It is enough to clean the tiles with a sponge, warm water and a neutral liquid soap. Finally, rinse with clean water.

