


LUCIDO
COLLECTION

200X200MM
(GLOSSY)
GLAZED VITRIFIED TILES

LUCIDO
COLLECTION

(8"X8") 200X200MM
GLAZED VITRIFIED TILES

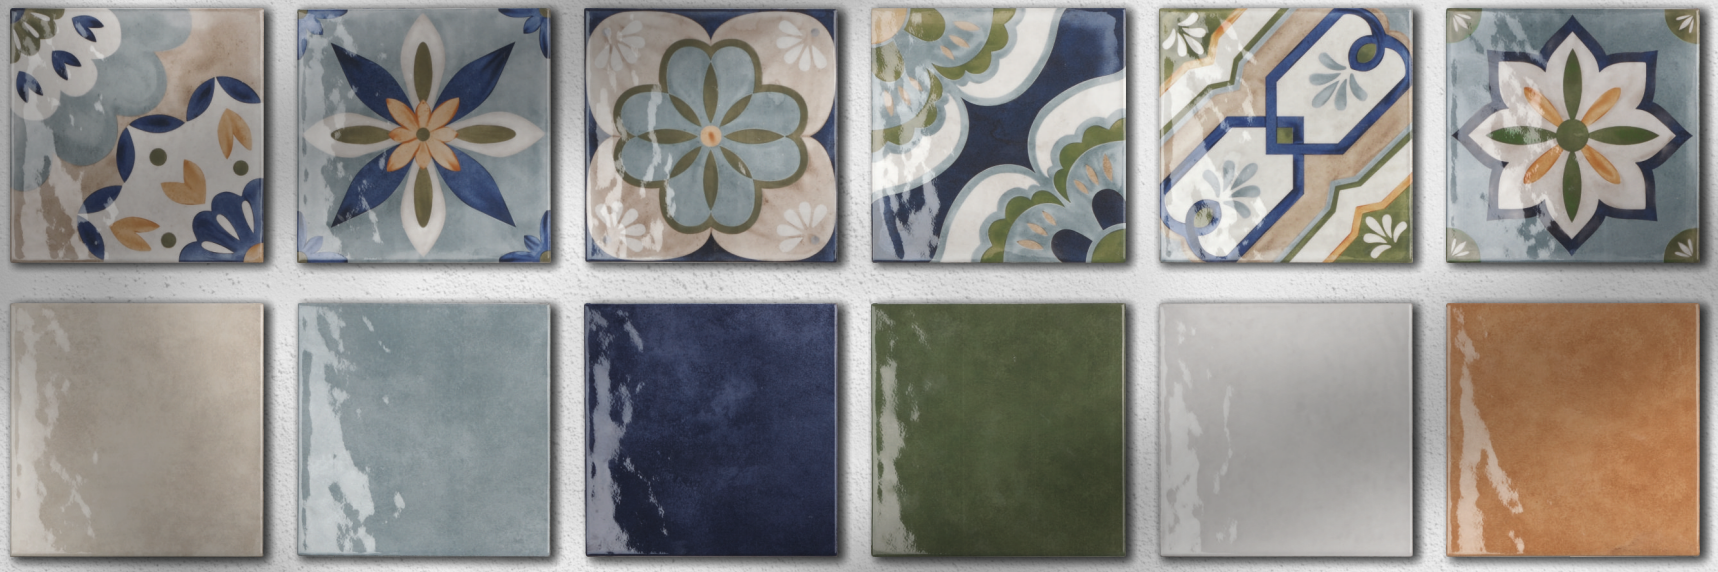

The Luciso Collection, an extraordinary blend of six captivating décor tiles and six elegant base tiles, is where rich cultural heritage meets artistic brilliance. Its designs evoke a timeless, vibrant energy that resonates with every room.

GLOSSY WALL 8MM

LUCIDO
COLLECTION

(8"X8") 200X200MM
GLAZED VITRIFIED TILES

LOW WATER
ABSORTION E≤0.5%

WALL GLOSSY 8MM



80381
LUCIDO FLORAL



80401
LUCIDO BASE SAND



80381 LUCIDO FLORAL | 80401 LUCIDO BASE SAND

LUCIDO
COLLECTION

(8"X8") 200X200MM
GLAZED VITRIFIED TILES

LOW WATER
ABSORTION E≤0.5%

WALL GLOSSY 8MM



80382
LUCIDO BLOOM



80402
LUCIDO BASE CELESTE



80382 LUCIDO BLOOM | 80402 LUCIDO BASE CELESTE

LUCIDO
COLLECTION


(8"X8") 200X200MM
GLAZED VITRIFIED TILES

LOW WATER
ABSORTION E≤0.5%

WALL GLOSSY 8MM



80383
LUCIDO SVETE

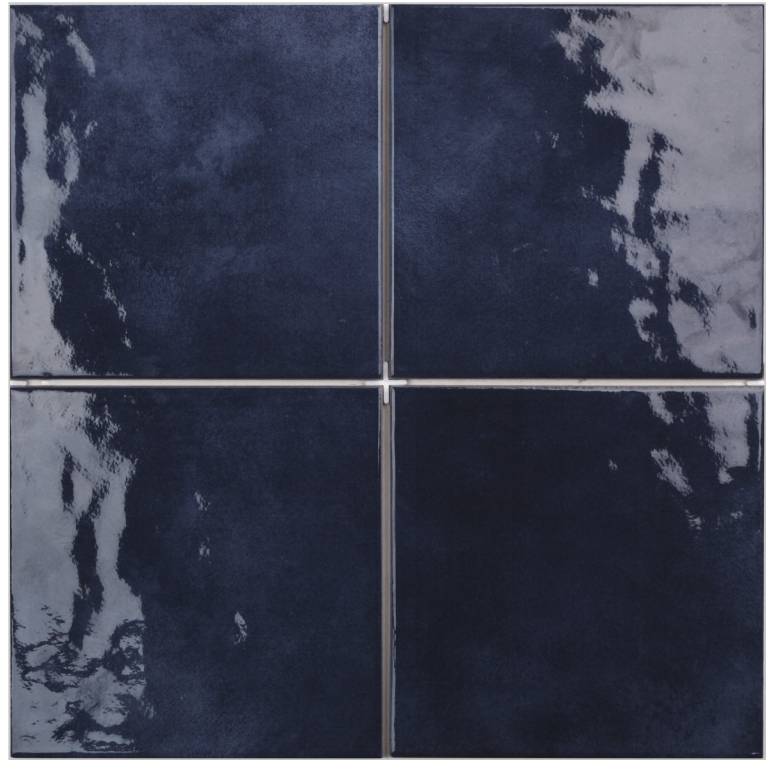

80403
LUCIDO BASE ROYAL BLUE



80403 LUCIDO BASE ROYAL BLUE

LUCIDO
COLLECTION


(8"X8") 200X200MM
GLAZED VITRIFIED TILES

LOW WATER
ABSORTION E≤0.5%

WALL GLOSSY 8MM



80384
LUCIDO QVAVILI

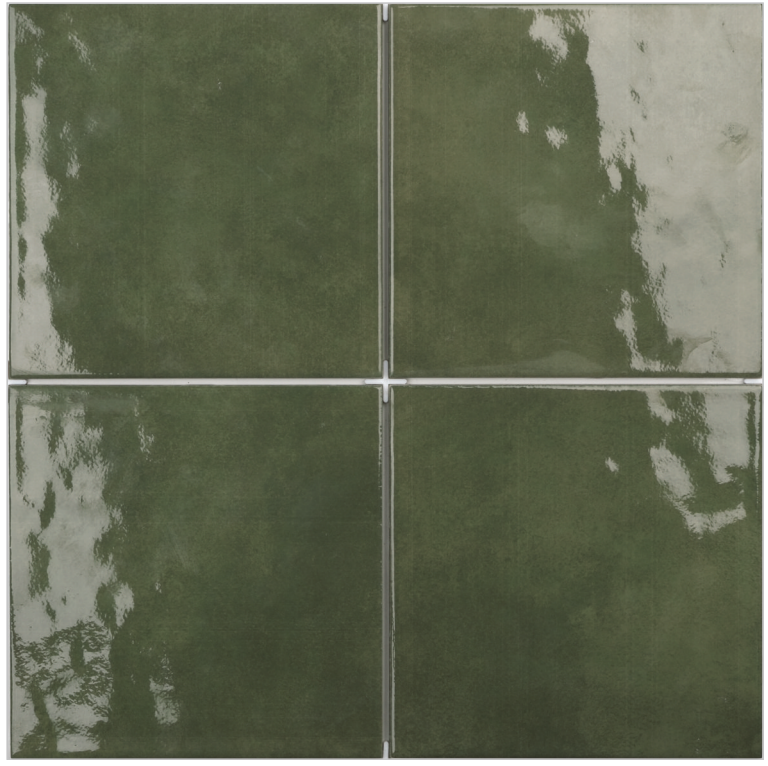

80404
LUCIDO BASE MOSS GREEN



80384 LUCIDO QVAVILI

LUCIDO
COLLECTION

(8"X8") 200X200MM
GLAZED VITRIFIED TILES

LOW WATER
ABSORTION E≤0.5%

WALL GLOSSY 8MM



80385
LUCIDO CUBET



80405
LUCIDO BASE BIANCO



80385 LUCIDO CUBET



80405 LUCIDO BASE BIANCO

LUCIDO
COLLECTION


(8"X8") 200X200MM
GLAZED VITRIFIED TILES

LOW WATER
ABSORTION E≤0.5%

WALL GLOSSY 8MM



80386
LUCIDO PHOOL

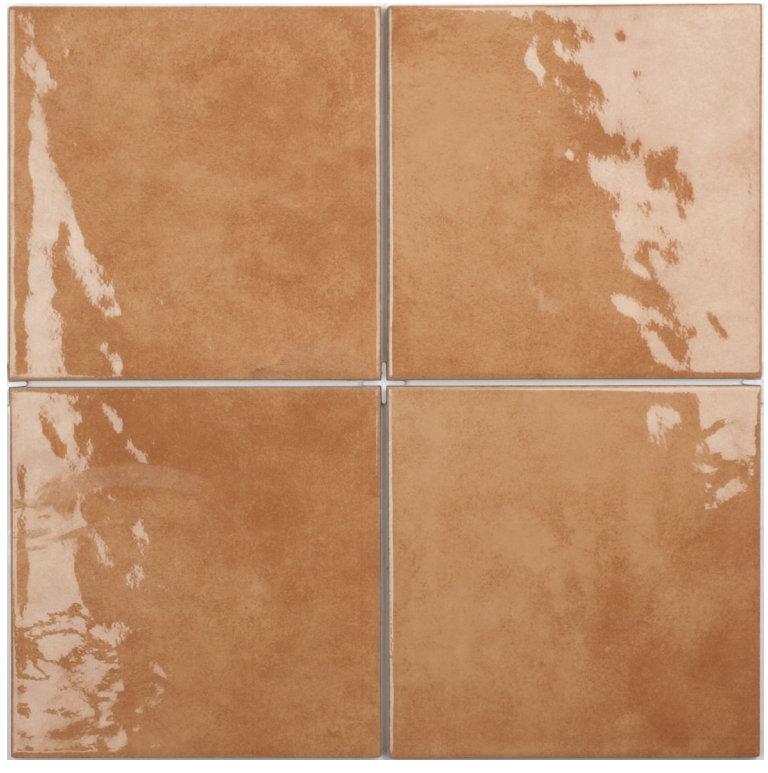

80406
LUCIDO BASE HONEY YELLOW

CHARACTERISTICS OF GLAZED PORCELAIN TILES

DRY-PRESSED CERAMIC TILES, WITH LOW WATER ABSORTION≤0.5%,
FOR INTERNAL AND EXTERNAL WALLS AND FLOORS

Fire Reaction	Class A1
Breaking Strength	≥1300 N
Thermal Shock Resistance	PASS
Durability For:	
Indoor Uses	PASS
Outdoor Uses	PASS
Resistance to Chemical for Household use and Swimming Pool Salts	ISO 10545-13 GA
Resistance to Low Concentrations of Acids and Alkalis	ISO 10545-13 GLA
Resistance to High Concentrations of Acids and Alkalis	ISO 10545-13 GHA
Stain Resistance	ISO 10545-14 Class 5

PACKAGING DETAILS

SIZE	THICKNESS	PIECES/BOX	SQM./BOX	SQFT./BOX	KG/BOX
200X200MM (8"X8")	8.00MM	19	0.76	8.18	14.00

Note :

- Size / shade variation is inherent in porcelain tiles , in case of any complain its should be brought to our dealer's notice before laying the tiles.
- Colour shown are indicative only. Check actual tiles for exact colour.
- The information contained in this catalogue are accurate as possible, but cannot be considered as legally binding.
- Customers are advised to inspect a sample of the tile before ordering.
- The company reserves the right to change the specifications without prior notice.

Exterior Elevation or interior Walls & Floors



TILE FIXING INSTRUCTIONS

It is necessary to use an appropriate adhesive and grouting material for each product An initial approach must be made before starting the installation and take into account the type of joint, structural, perimeter, expansion and installation that must be used for each use. We advise that to obtain an optimal result a 3 mm joint should be used.

Once the placement is finished: it is recommended to remove the remains of adhesive material and specific grouting for each material, following the manufacturer's instructions for these products.

In general, powder detergents and aggressive scouring pads should not be used for cleaning.
It is enough to clean the tiles with a sponge, warm water and a neutral liquid soap. Finally, rinse with clean water.

