

CASA COLLECTION

GLAZED PORCELAIN TILES
200X200MM (MATT)

CASA

COLLECTION

Experience the eternal beauty of matt finished tiles in unique 200x200mm sizes, boasting a spectrum of intricate and oriental designs inspired by our rich heritage.




CASA
COLLECTION

GLAZED PORCELAIN TILES
WITH LOW WATER ABSORTION E≤0.5%







SP 80001
CASA DICATE

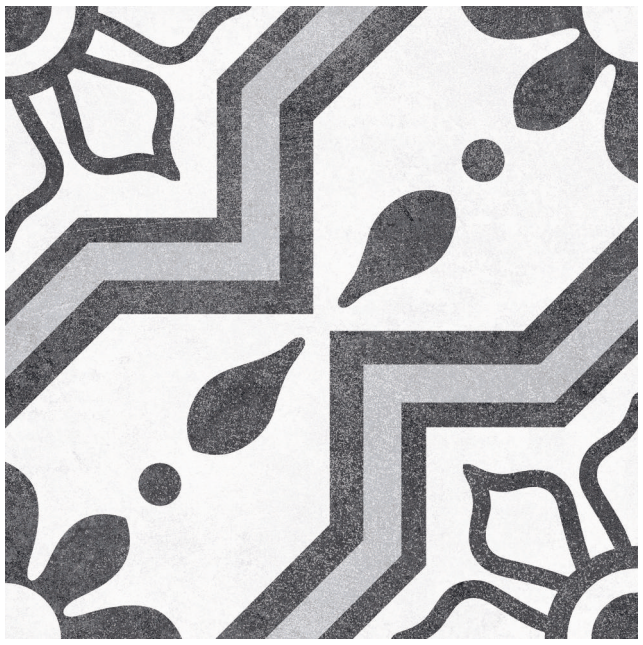





SP 80002
CASA ARTE

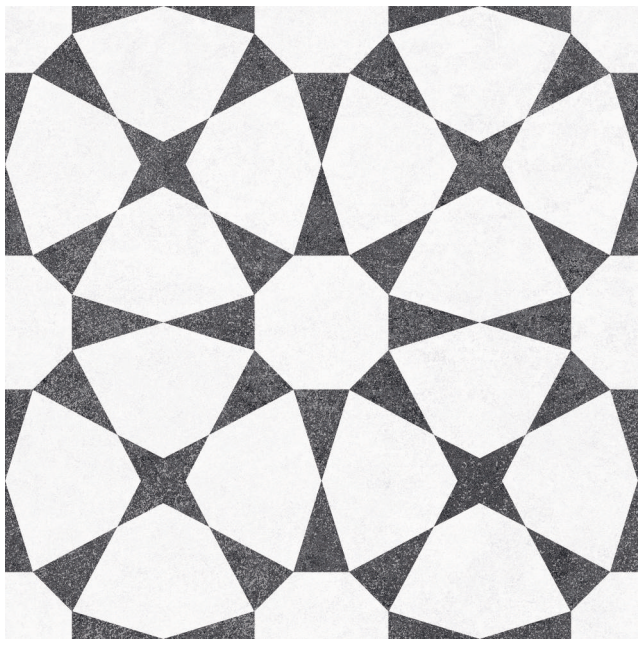



SP 80003
CASA STAR

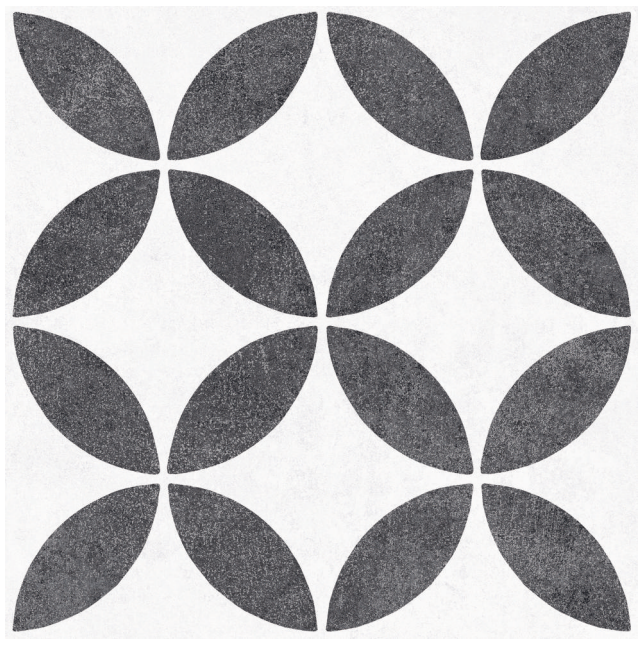



SP 80004
CASA CRIC

SIZE.
200X200MM

SURFACE
MATT


WALL TILE


FLOOR TILE

SP 80001
CASA DICATE

CASA
COLLECTION


GLAZED PORCELAIN TILES
WITH LOW WATER ABSORTION E≤0.5%

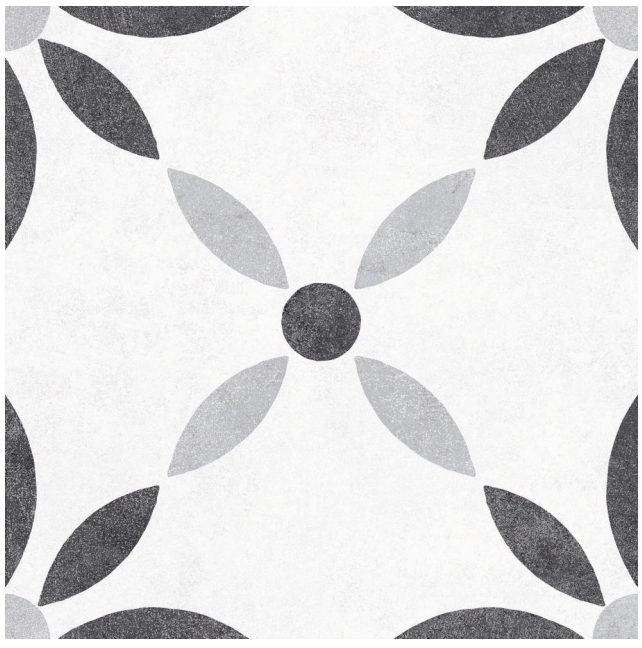





SP 80005
CASA BLOOM





SP 80006
CASA FLECHA

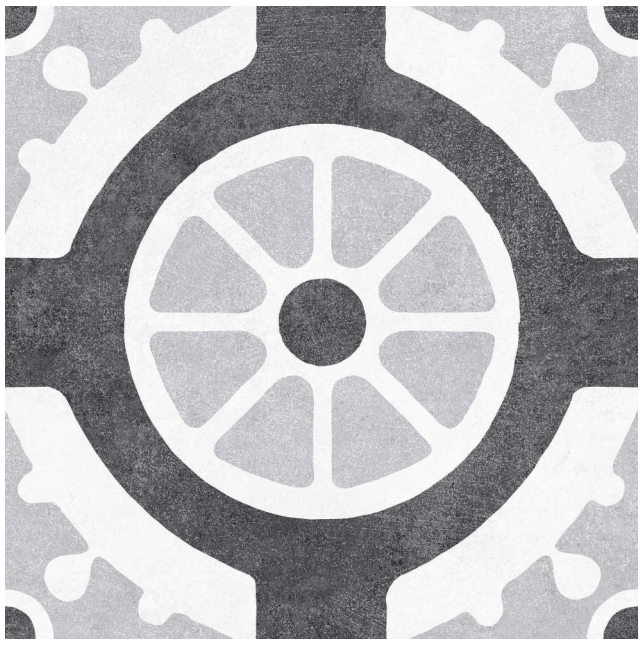



SP 80007
CASA MELON





SP 80008
CASA REFLOR

SIZE.
200X200MM

SURFACE
MATT

WALL TILE

FLOOR TILE


SP 80005
CASA BLOOM




SP 80007
CASA MELON

CASA
COLLECTION

GLAZED PORCELAIN TILES
WITH LOW WATER ABSORTION E≤0.5%

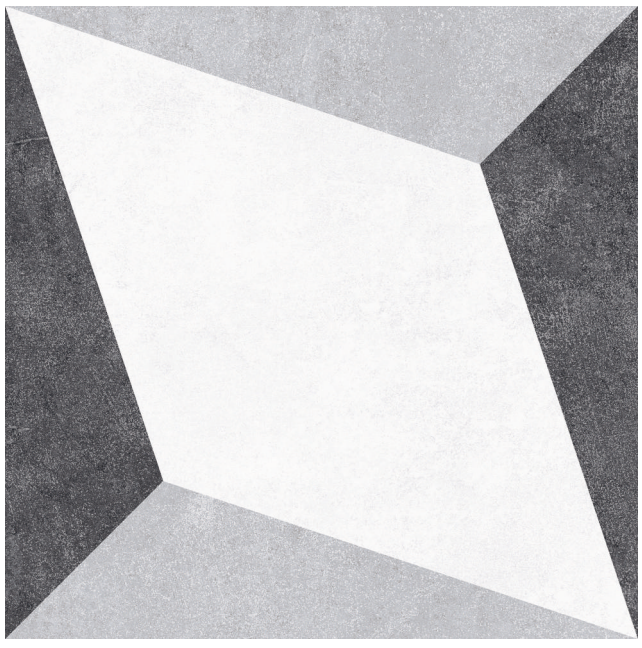



SP 80009
CASA BOSTON

SP 80010
CASA LT GREY





SP 80011
CASA GREY





SP 80012
CASA BLACK

SIZE.
200X200MM

SURFACE
MATT

WALL TILE

FLOOR TILE



SP 80011
CASA GREY

CHARACTERISTICS OF GLAZED PORCELAIN TILES

DRY-PRESSED CERAMIC TILES, WITH LOW WATER ABSORTION ≤0.5%,
FOR INTERNAL AND EXTERNAL WALLS AND FLOORS

Fire Reaction	Class A1
Breaking Strength	≥1300 N
Thermal Shock Resistance	PASS
Durability For:	
Indoor Uses	PASS
Outdoor Uses	PASS
Frost Resistance	PASS
Resistance to Chemical for Household use and Swimming Pool Salts	ISO 10545-13 GA
Resistance to Low Concentrations of Acids and Alkalis	ISO 10545-13 GLA
Resistance to High Concentrations of Acids and Alkalis	ISO 10545-13 GHA
Stain Resistance	ISO 10545-14 Class 5

PACKAGING DETAILS

SIZE	THICKNESS	PIECES/BOX	SQM./BOX	SQFT./BOX	KG/BOX
200X200MM (8"X8")	8.00MM	19	0.76	8.18	14.00

Note :

- Size / shade variation is inherent in porcelain tiles , in case of any complain its should be brought to our dealer's notice before laying the tiles.
- Colour shown are indicative only. Check actual tiles for exact colour.
- The information contained in this catalogue are accurate as possible, but cannot be considered as legally binding.
- Customers are advised to inspect a sample of the tile before ordering.
- The company reserves the right to change the specifications without prior notice.

Exterior Elevation or interior Walls & Floors



TILE FIXING INSTRUCTIONS

It is necessary to use an appropriate adhesive and grouting material for each product An initial approach must be made before starting the installation and take into account the type of joint, structural, perimeter, expansion and installation that must be used for each use. We advise that to obtain an optimal result a 1.5 mm joint should be used

Once the placement is finished: it is recommended to remove the remains of adhesive material and specific grouting for each material, following the manufacturer's instructions for these products.

In general, powder detergents and aggressive scouring pads should not be used for cleaning. It is enough to clean the tiles with a sponge, warm water and a neutral liquid soap. Finally, rinse with clean water.