POOLS
COLLECTION

GLAZED VITRIFIED TILES

200x200mm | 8"x8"



Surfaces that make pool just


Phenomenal



POOL

COLLECTION


We offer truly an experience of lifetime in pool with our incredible surfaces made with superior glossy finish. It comes in 6 different shades that cater to every needs.

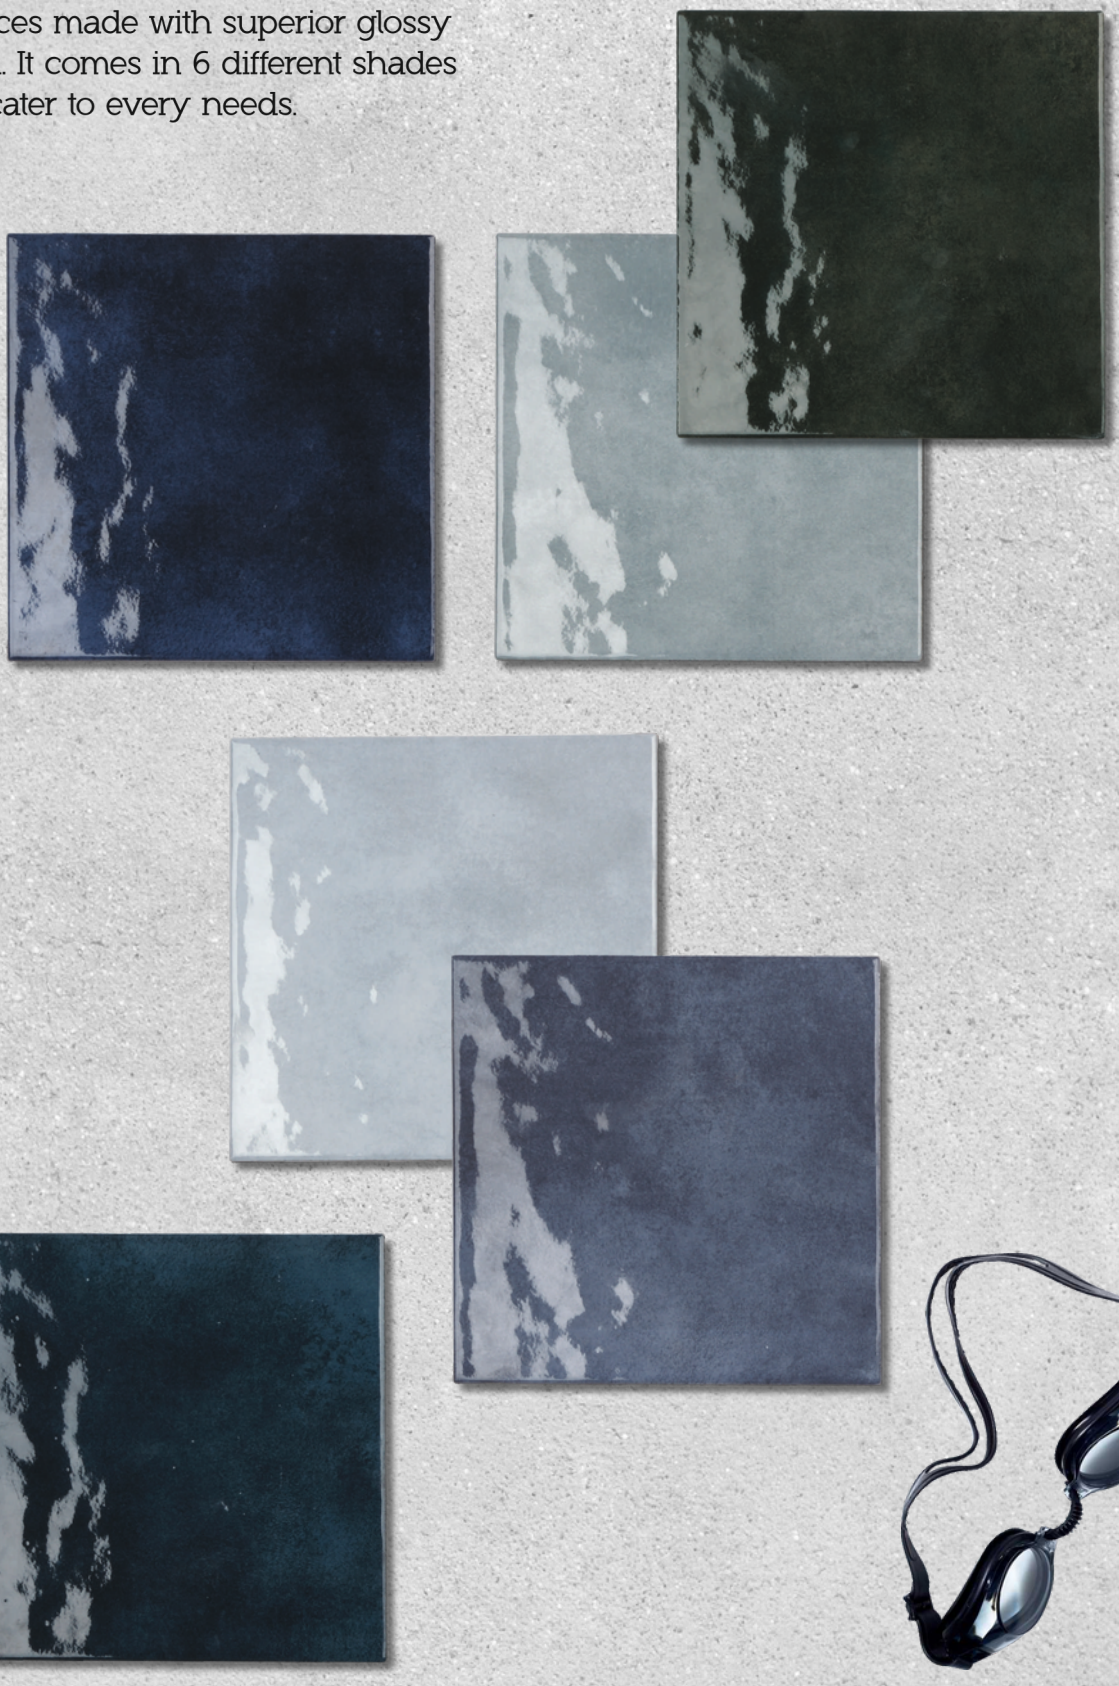

POOLS
COLLECTION

(8"X8")**200X200MM**
GLAZED VITRIFIED TILES

LOW WATER
ABSORTION E≤0.5%

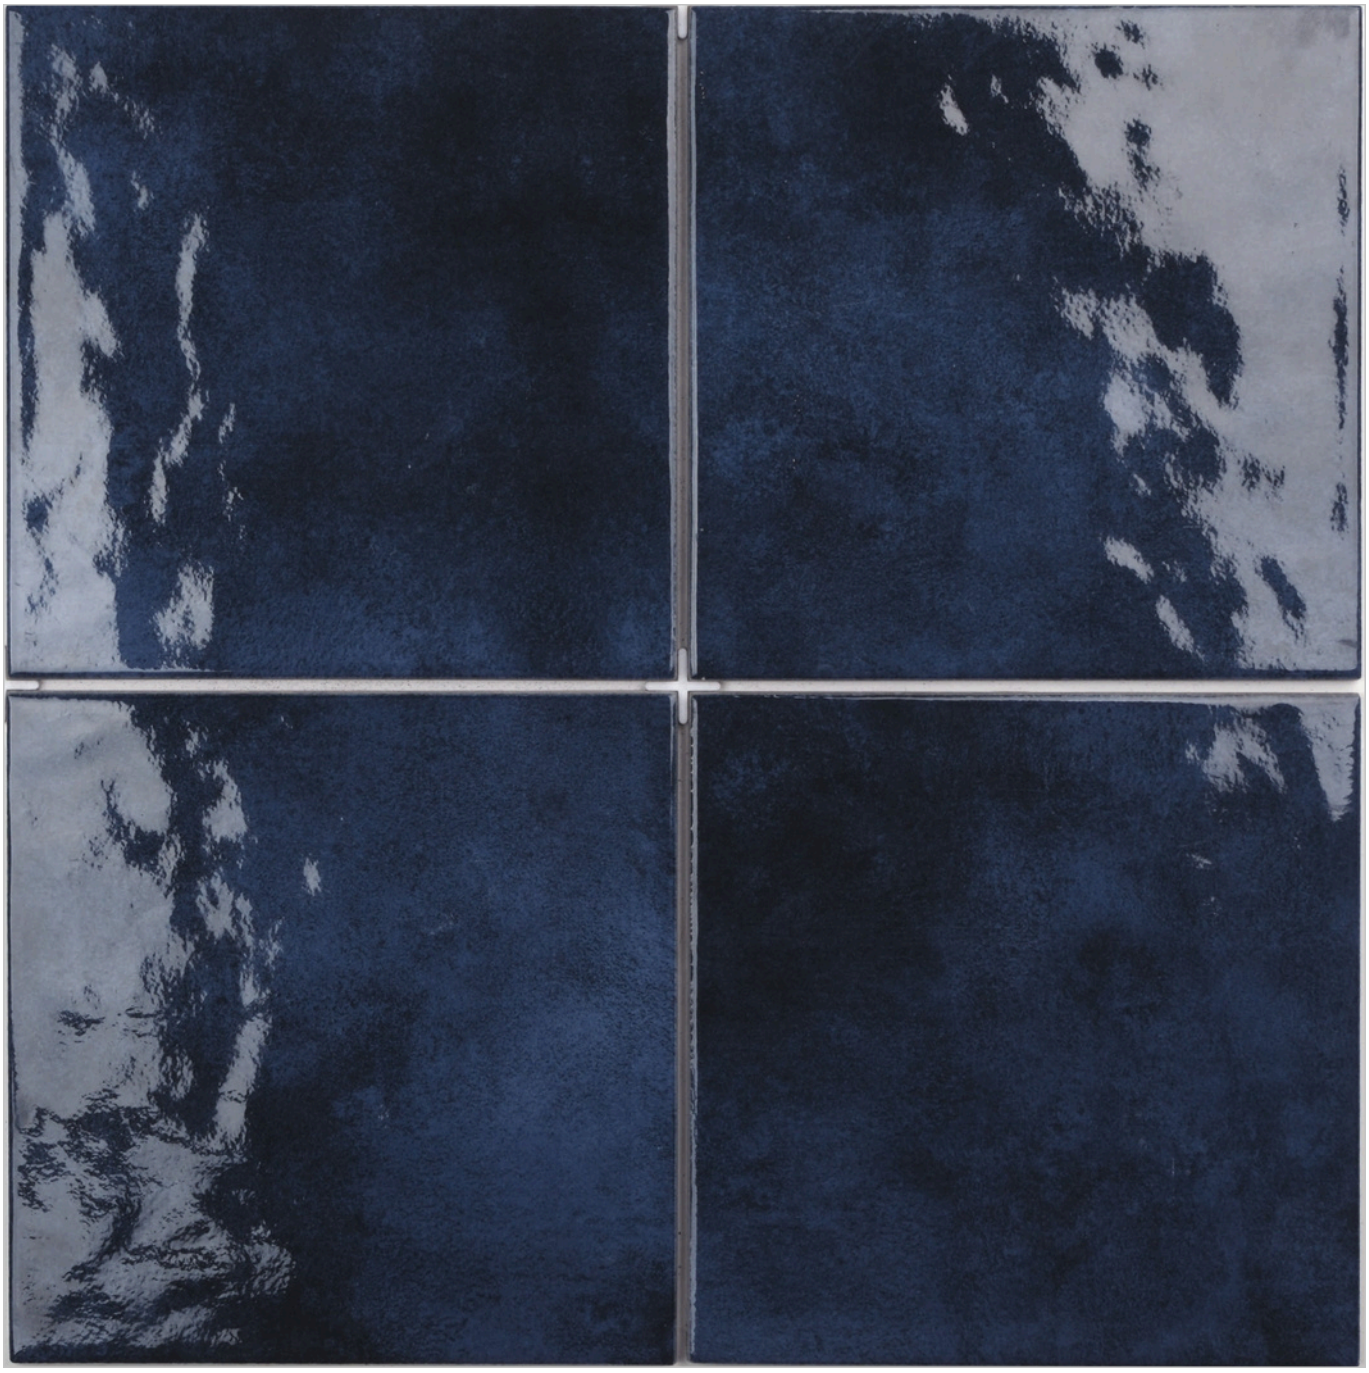

80391
POOLS THUNDER BLUE

WALL GLOSSY 8MM




80391 POOLS THUNDER BLUE

POOLS
COLLECTION

(8"X8")**200X200MM**
GLAZED VITRIFIED TILES

LOW WATER
ABSORTION E≤0.5%

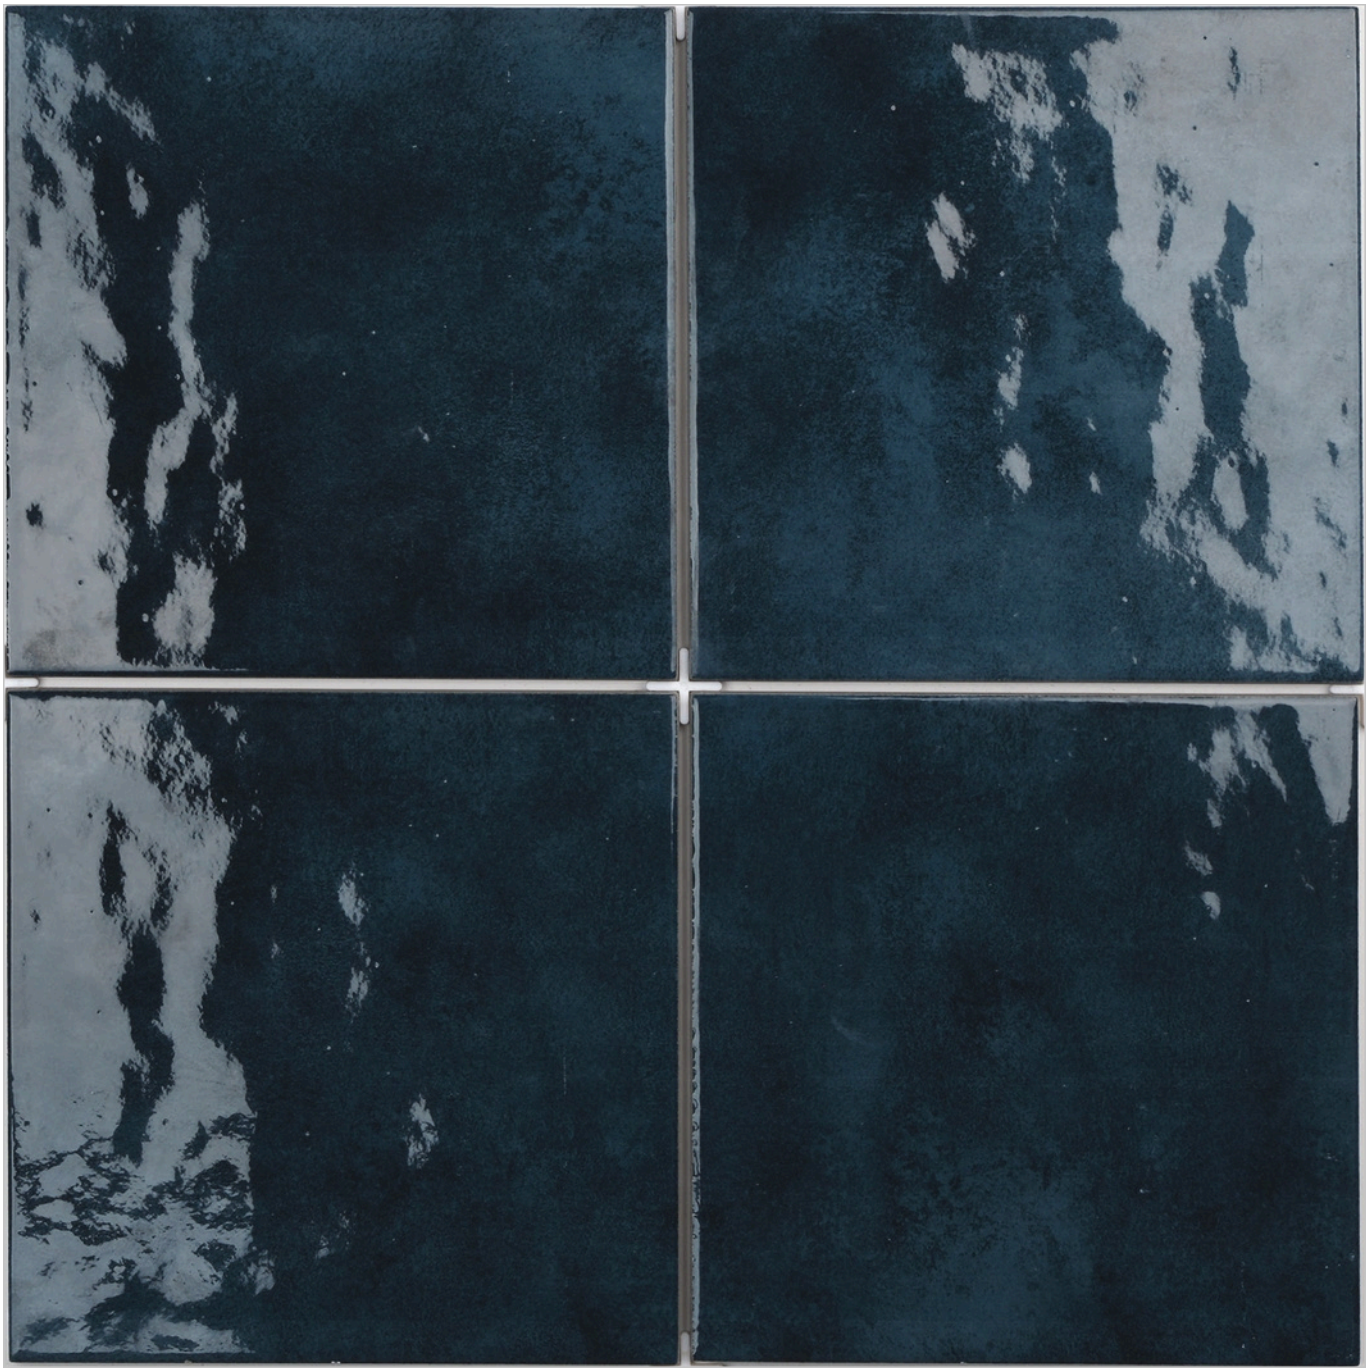

80392
POOLS AQUATIC

WALL GLOSSY 8MM




80392 POOLS AQUATIC

POOLS
COLLECTION

(8"X8")**200X200MM**
GLAZED VITRIFIED TILES

LOW WATER
ABSORTION E≤0.5%

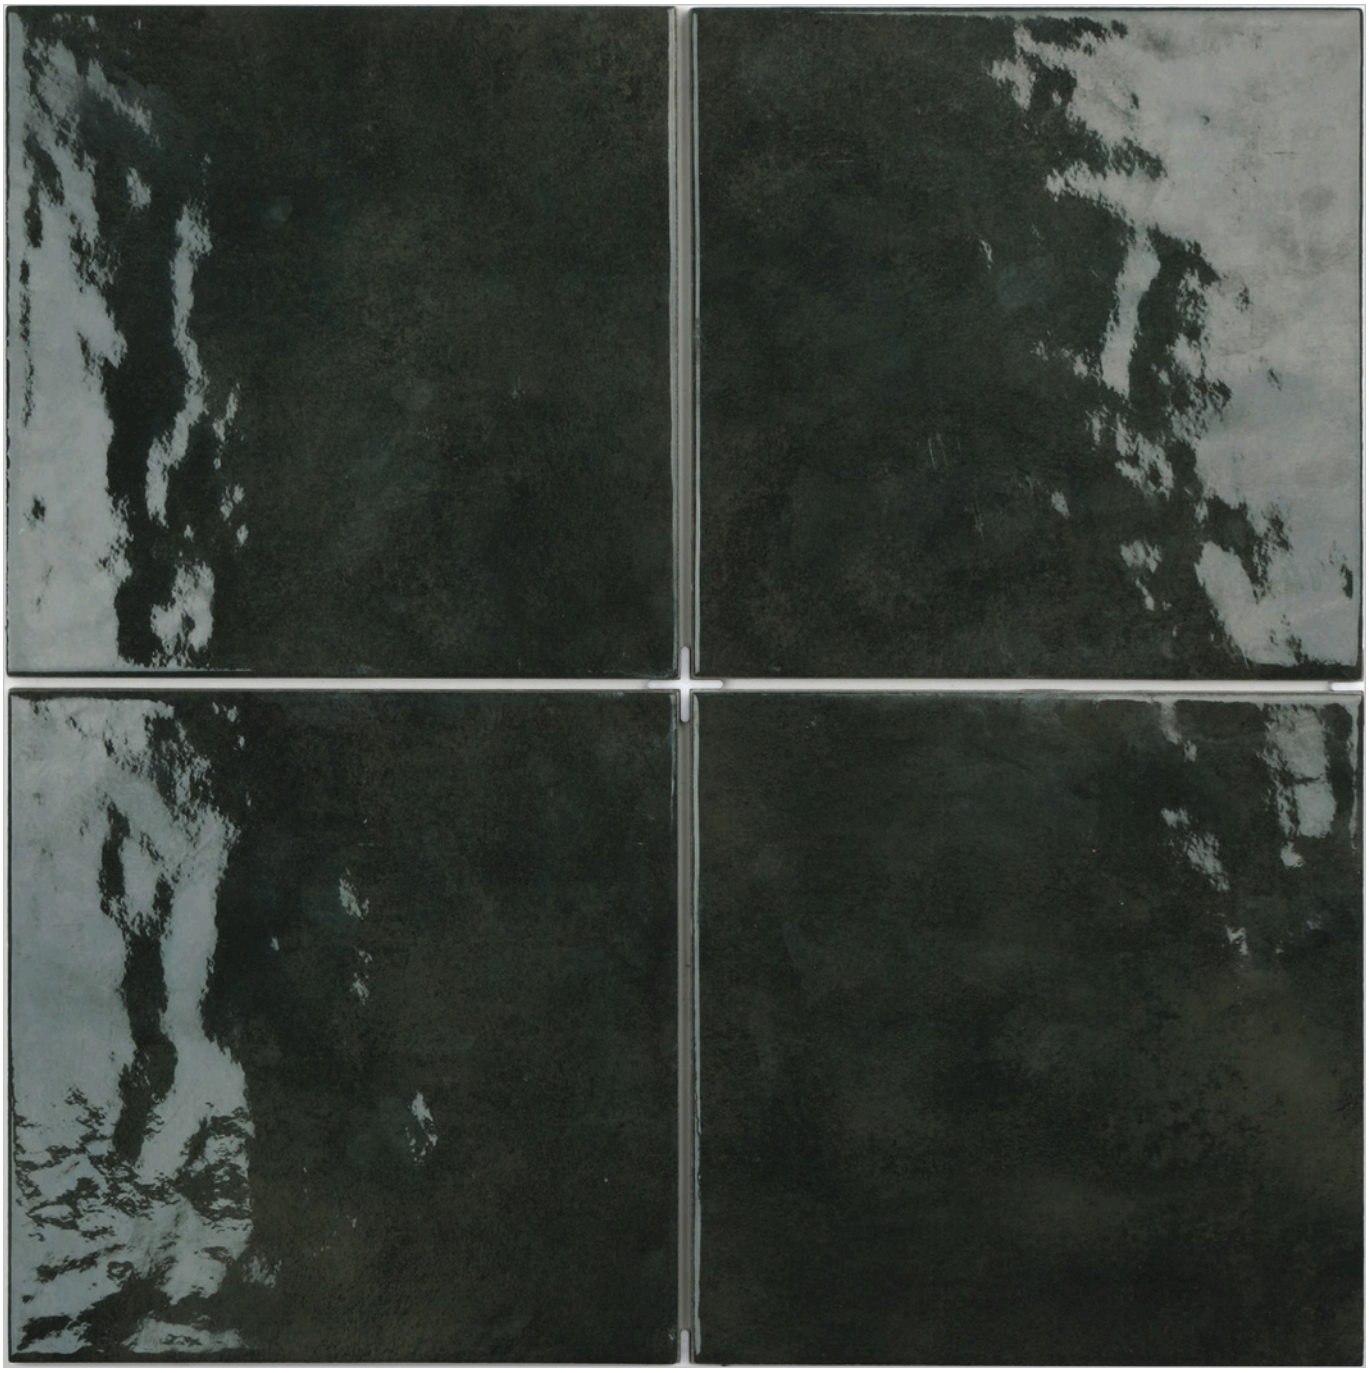

80393
POOLS BOTTLE GREEN

WALL GLOSSY 8MM




80393 POOLS BOTTLE GREEN

POOLS
COLLECTION

(8"X8")**200X200MM**
GLAZED VITRIFIED TILES

LOW WATER
ABSORTION E≤0.5%

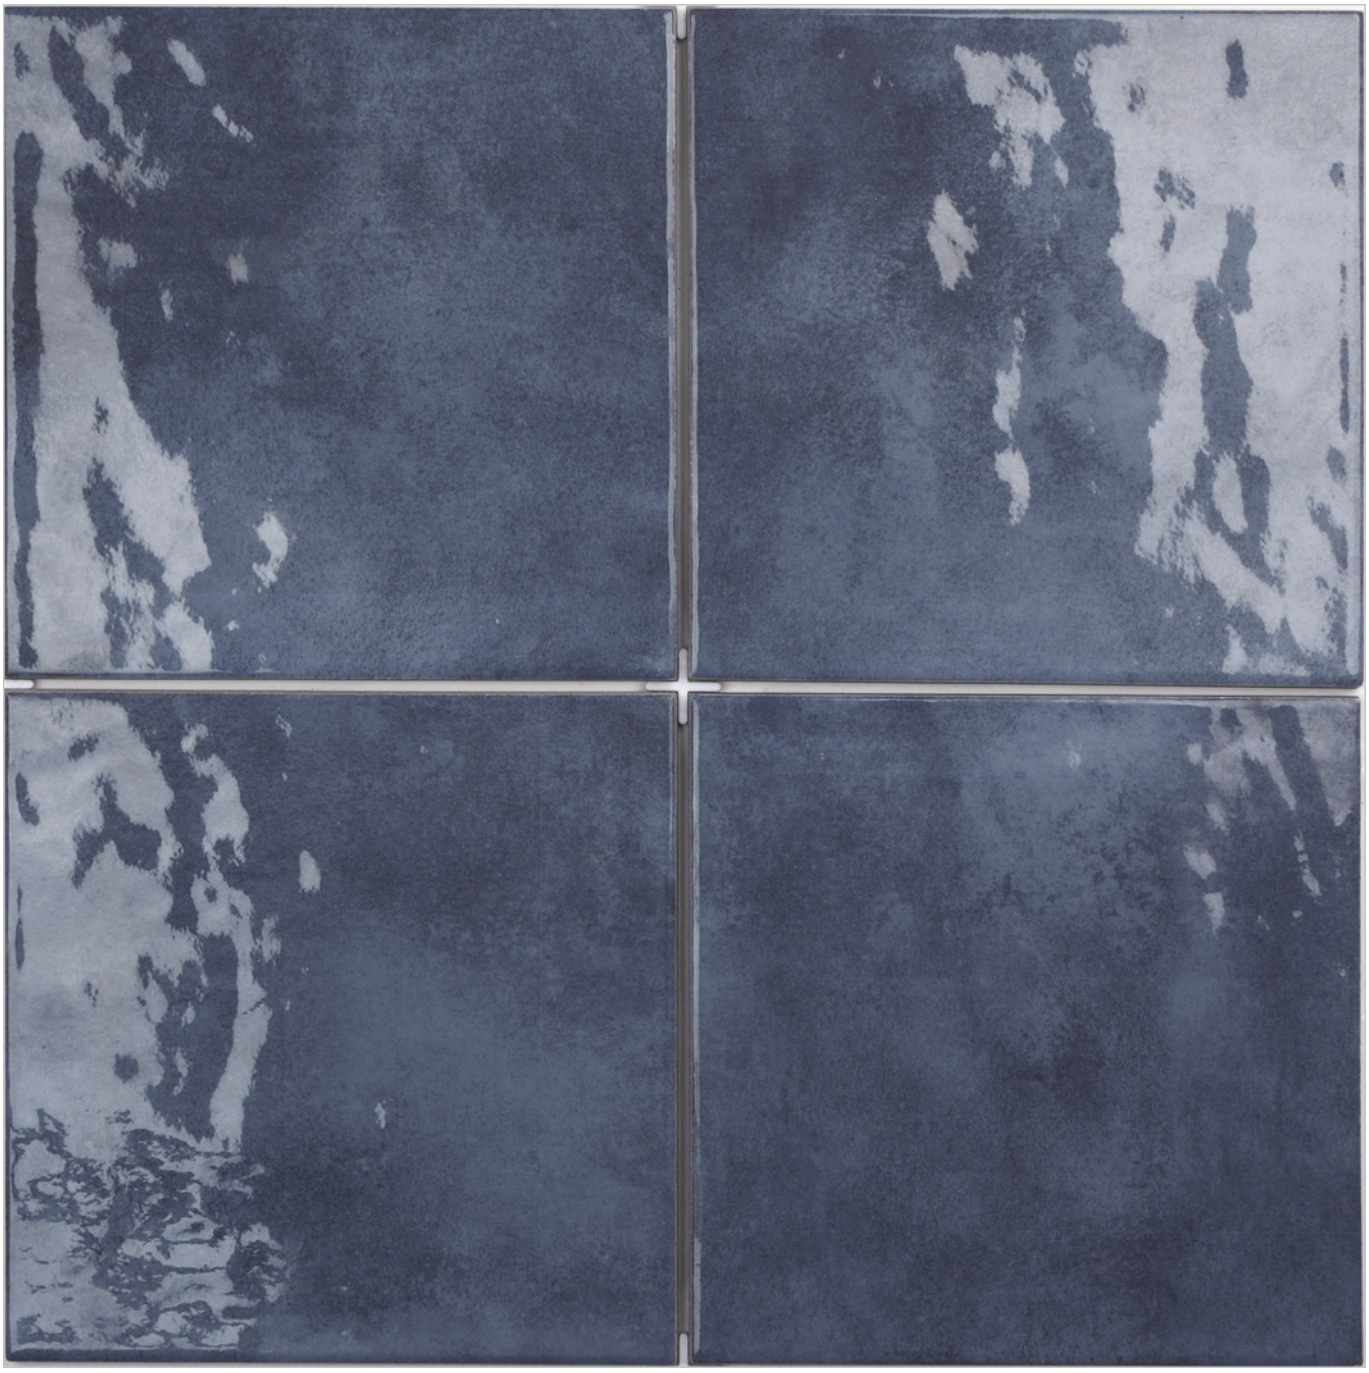

80394
POOLS ALPINE BLUE

WALL GLOSSY 8MM




80394 POOLS ALPINE BLUE

POOLS
COLLECTION

(8"X8")**200X200MM**
GLAZED VITRIFIED TILES

LOW WATER
ABSORTION E≤0.5%

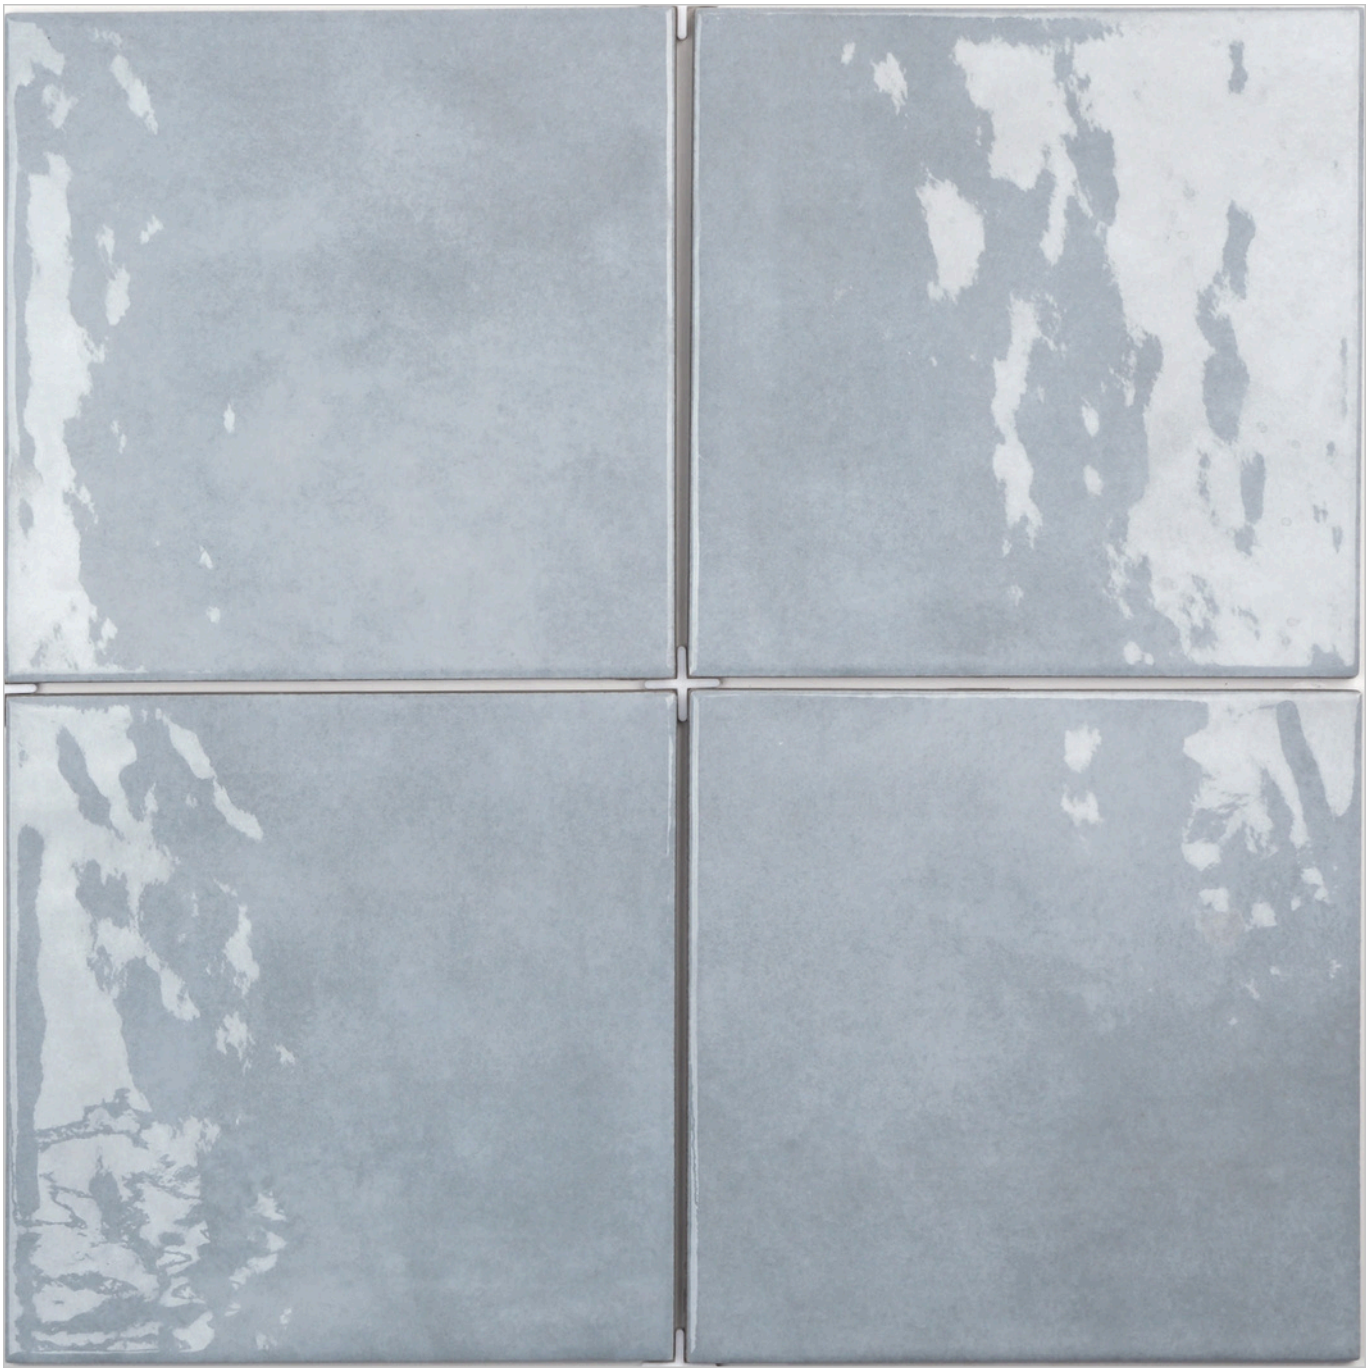

80395
POOLS SKY BLUE

WALL GLOSSY 8MM



80395 POOLS SKY BLUE

POOLS
COLLECTION

(8"X8")**200X200MM**
GLAZED VITRIFIED TILES

LOW WATER
ABSORTION E≤0.5%



80402
LUCIDO BASE CELESTE

WALL GLOSSY 8MM

CHARACTERISTICS OF GLAZED PORCELAIN TILES

DRY-PRESSED CERAMIC TILES, WITH LOW WATER ABSORTION ≤ 0.5%,
FOR INTERNAL AND EXTERNAL WALLS AND FLOORS

Fire Reaction	Class A1
Breaking Strength	≥ 1300 N
Thermal Shock Resistance	PASS
Durability For:	
Indoor Uses	PASS
Outdoor Uses	PASS
Frost Resistance	PASS
Resistance to Chemical for Household use and Swimming Pool Salts	ISO 10545-13 GA
Resistance to Low Concentrations of Acids and Alkalis	ISO 10545-13 GLA
Resistance to High Concentrations of Acids and Alkalis	ISO 10545-13 GHA
Stain Resistance	ISO 10545-14 Class 5

PACKAGING DETAILS

SIZE	THICKNESS	PIECES/BOX	SQM./BOX	SQFT./BOX	KG/BOX
200X200MM (8"X8")	8.00MM	19	0.76	8.18	14.00

Note :

- Size / shade variation is inherent in porcelain tiles , in case of any complain its should be brought to our dealer's notice before laying the tiles.
- Colour shown are indicative only. Check actual tiles for exact colour.
- The information contained in this catalogue are accurate as possible, but cannot be considered as legally binding.
- Customers are advised to inspect a sample of the tile before ordering.
- The company reserves the right to change the specifications without prior notice.

Exterior Elevation or interior Walls



TILE FIXING INSTRUCTIONS

It is necessary to use an appropriate adhesive and grouting material for each product An initial approach must be made before starting the installation and take into account the type of joint, structural, perimeter, expansion and installation that must be used for each use. We advise that to obtain an optimal result a 3 mm joint should be used

Once the placement is finished: it is recommended to remove the remains of adhesive material and specific grouting for each material, following the manufacturer's instructions for these products.

In general, powder detergents and aggressive scouring pads should not be used for cleaning. It is enough to clean the tiles with a sponge, warm water and a neutral liquid soap. Finally, rinse with clean water.

