SHILPKAR COLLECTION

GLAZED PORCELAIN TILES
200X200MM (MATT)

SHILPKAR

COLLECTION

Our collection is the epitome of intricate patterns that come in captivating colors. It comes in 5 different ornamental patterns in a subtle matt finish and 200x200mm size that mesmerizes all.




SHILPKAR
COLLECTION

GLAZED PORCELAIN TILES
WITH LOW WATER ABSORTION E≤0.5%




SP 80191 SHILPKAR JOYEE
RANDOM 04

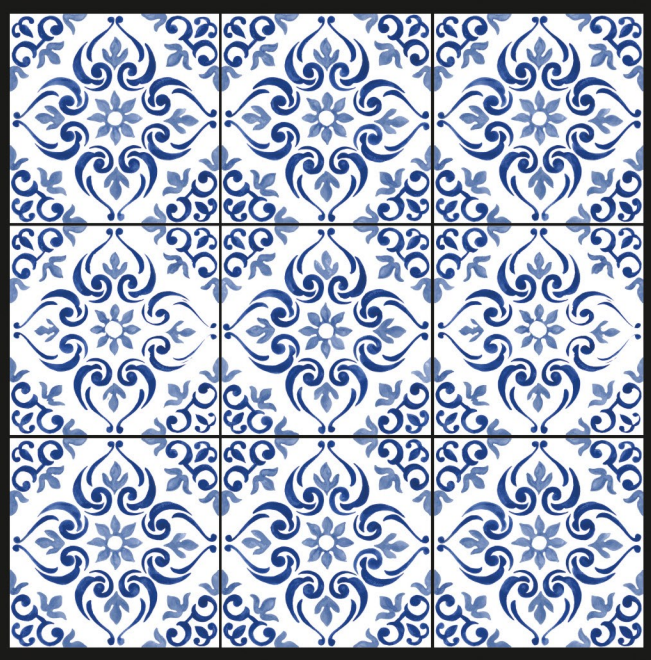




SP 80192 SHILPKAR KYOTO
RANDOM 04

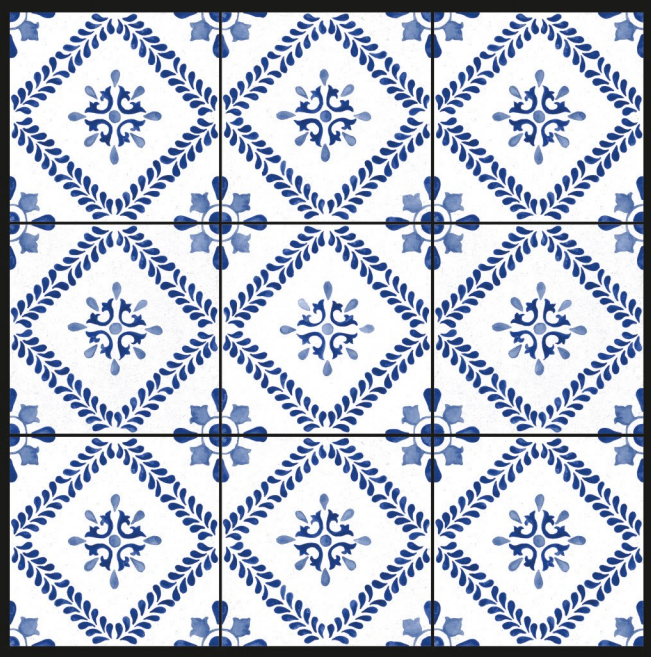



SP 80193 SHILPKAR WORLI
RANDOM 04

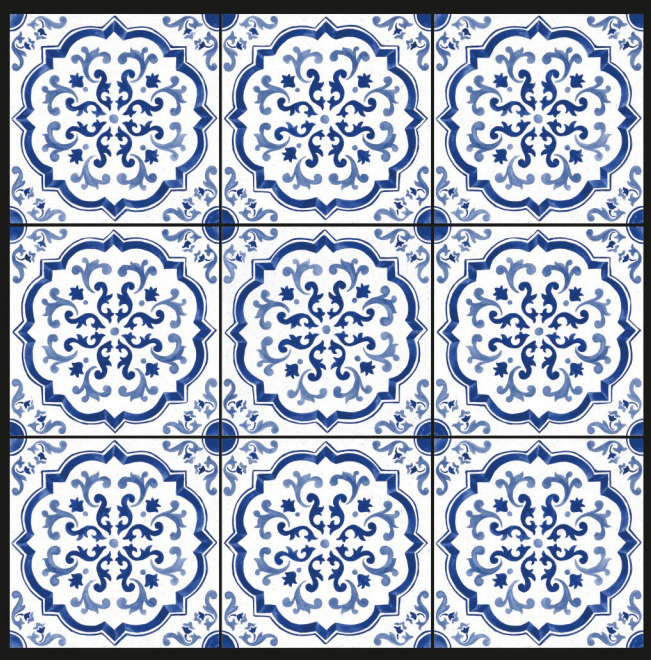

SIZE.
200X200MM

SURFACE
MATT

WALL TILE

FLOOR TILE

SP 80191
SHILPKAR
JOYEE



SP 80192
SHILPKAR
KYOTO

SHILPKAR
COLLECTION

GLAZED PORCELAIN TILES
WITH LOW WATER ABSORTION E≤0.5%





SP 80194 SHILPKAR AYAY
RANDOM 04

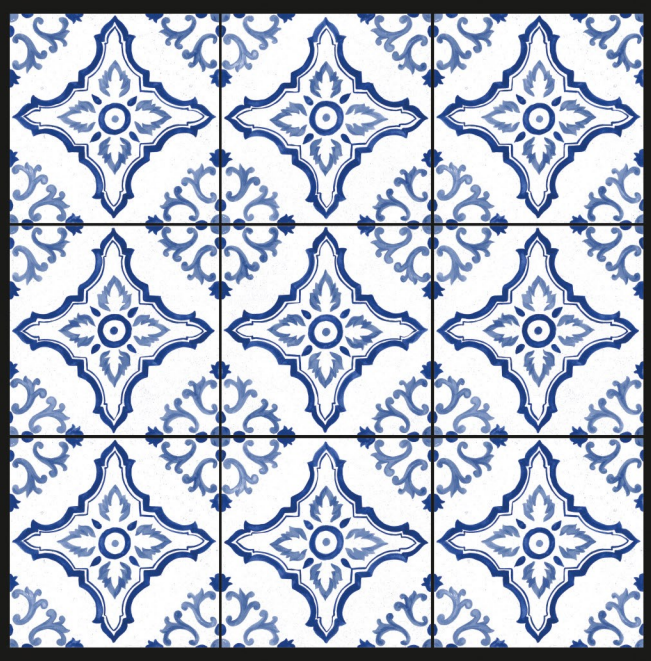




SP 80195 SHILPKAR TARAM
RANDOM 04

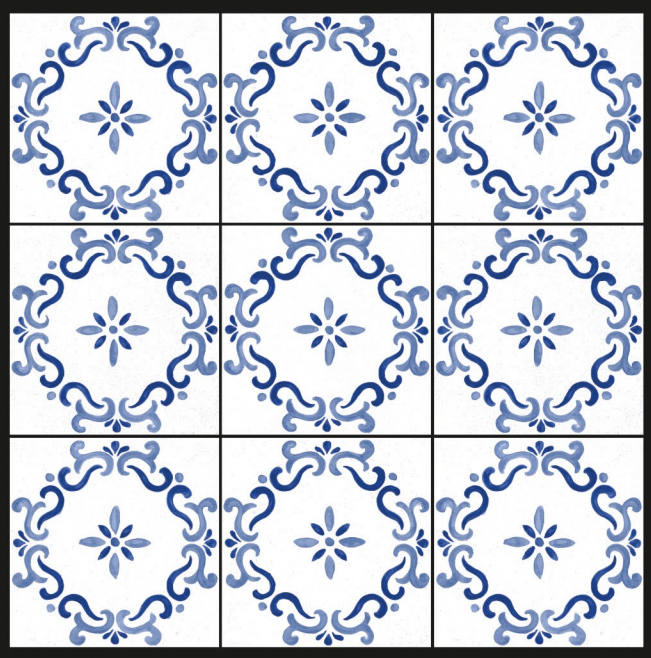

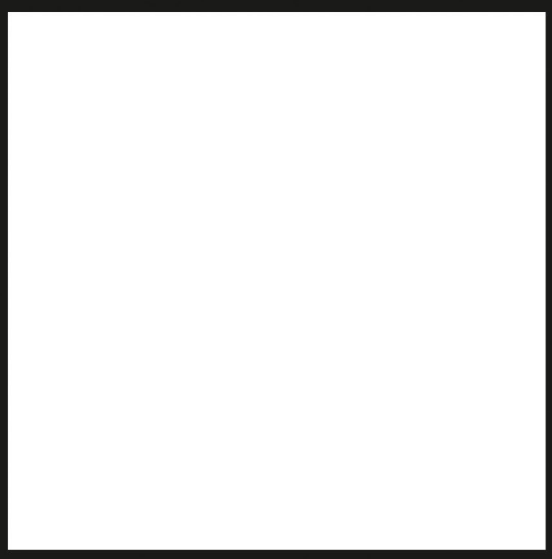

BASE
FLAT WHITE

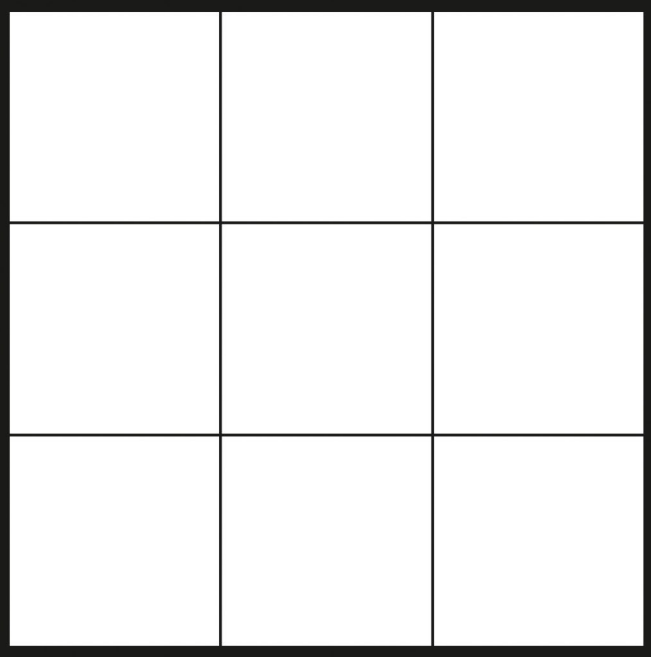

SIZE.
200X200MM

SURFACE
MATT

WALL TILE

FLOOR TILE

SP 80194
SHILPKAR
AYAY

CHARACTERISTICS OF GLAZED PORCELAIN TILES

DRY-PRESSED CERAMIC TILES, WITH LOW WATER ABSORTION ≤0.5%,
FOR INTERNAL AND EXTERNAL WALLS AND FLOORS

Fire Reaction	Class A1
Breaking Strength	≥1300 N
Thermal Shock Resistance	PASS
Durability For:	
Indoor Uses	PASS
Outdoor Uses	PASS
Frost Resistance	PASS
Resistance to Chemical for Household use and Swimming Pool Salts	ISO 10545-13 GA
Resistance to Low Concentrations of Acids and Alkalis	ISO 10545-13 GLA
Resistance to High Concentrations of Acids and Alkalis	ISO 10545-13 GHA
Stain Resistance	ISO 10545-14 Class 5

PACKAGING DETAILS

SIZE	THICKNESS	PIECES/BOX	SQM./BOX	SQFT./BOX	KG/BOX
200X200MM (8"X8")	8.00MM	19	0.76	8.18	14.00

Note :

- Size / shade variation is inherent in porcelain tiles , in case of any complain its should be brought to our dealer's notice before laying the tiles.
- Colour shown are indicative only. Check actual tiles for exact colour.
- The information contained in this catalogue are accurate as possible, but cannot be considered as legally binding.
- Customers are advised to inspect a sample of the tile before ordering.
- The company reserves the right to change the specifications without prior notice.

Exterior Elevation or interior Walls & Floors



TILE FIXING INSTRUCTIONS

It is necessary to use an appropriate adhesive and grouting material for each product An initial approach must be made before starting the installation and take into account the type of joint, structural, perimeter, expansion and installation that must be used for each use. We advise that to obtain an optimal result a 1.5 mm joint should be used

Once the placement is finished: it is recommended to remove the remains of adhesive material and specific grouting for each material, following the manufacturer's instructions for these products.

In general, powder detergents and aggressive scouring pads should not be used for cleaning. It is enough to clean the tiles with a sponge, warm water and a neutral liquid soap. Finally, rinse with clean water.