GLAZED PORCELAIN TILES

HEXAGON 215X 250MM

(MATT CARVING)

COLLECTION ' **24**

PETAL
CARVING COLLECTION

GLINT
CARVING COLLECTION

HOPE
CARVING COLLECTION

BALI
CARVING COLLECTION

EMERALD
CARVING COLLECTION

SIZE.
215X250MM

SURFACE
MATT CARVING

WALL TILE

FLOOR TILE

BALI

CARVING COLLECTION

COLLECTION IN STOCK COLLECTION



SIZE.
215X250MM

SURFACE
MATT CARVING


WALL TILE

FLOOR TILE


BALI
CARVING COLLECTION


GLAZED PORCELAIN TILES
WITH LOW WATER ABSORTION E≤0.5%



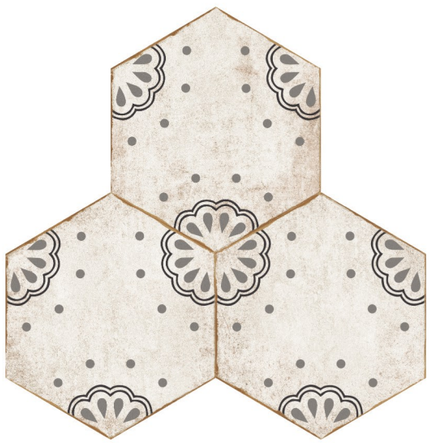

90071 BALI ANTRACITA
RANDOM 06

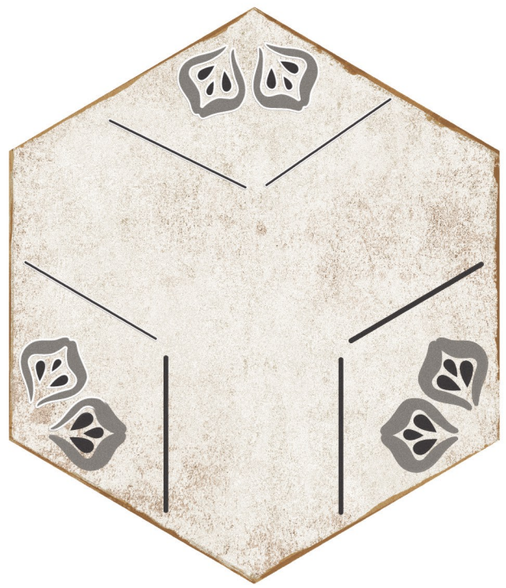

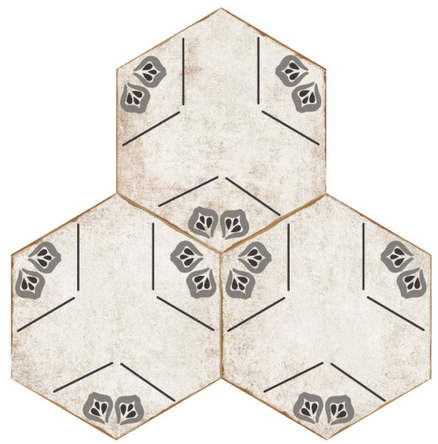



90072 BALI NUSA
RANDOM 06





90073 BALI TUBAN
RANDOM 06

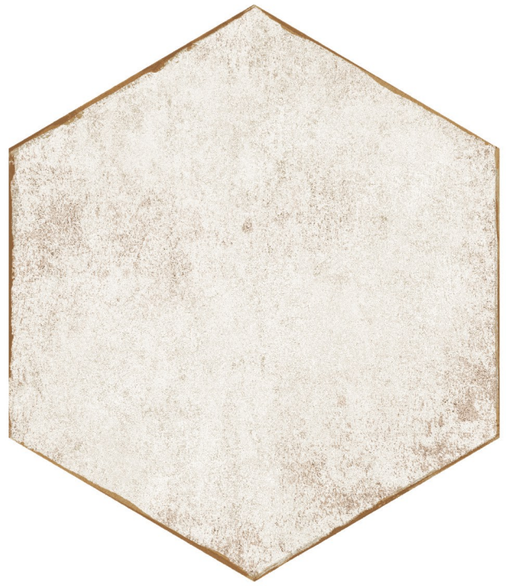

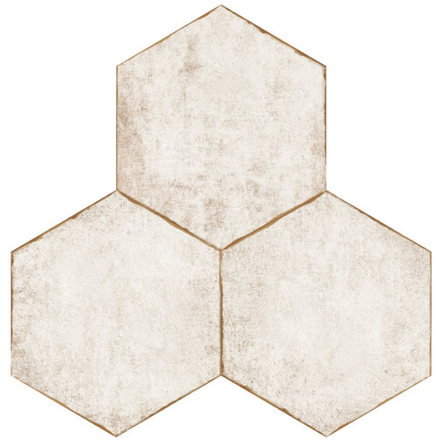

90074 BALI BASE
RANDOM 06

SIZE.
215X250MM

SURFACE
MATT CARVING

WALL TILE

FLOOR TILE

90072 BALI NUSA

HOPE

CARVING COLLECTION

COLLECTION IN STOCK COLLECTION



SIZE.
215X250MM

SURFACE
MATT CARVING

WALL TILE

FLOOR TILE


HOPE
CARVING COLLECTION

GLAZED PORCELAIN TILES
WITH LOW WATER ABSORTION E≤0.5%





90011 HOPE COUNTER

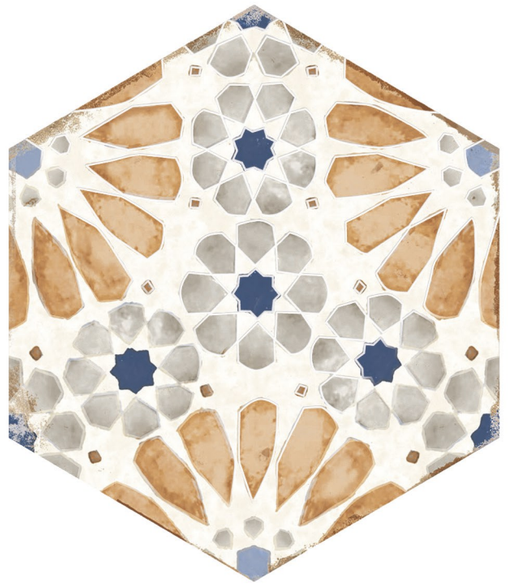




90012 HOPE PLATINA





90013 HOME HAMPTON



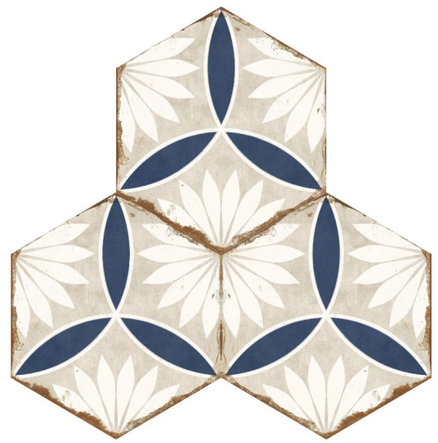

90014 HOPE TURN

SIZE.
215X250MM

SURFACE
MATT CARVING


WALL TILE

FLOOR TILE

HOPE
CARVING COLLECTION

GLAZED PORCELAIN TILES
WITH LOW WATER ABSORTION E≤0.5%



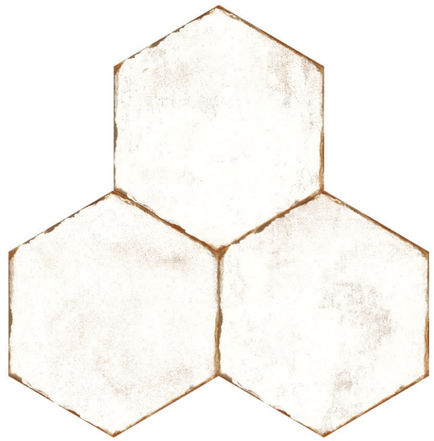

90011 HOPE COUNTER

SIZE.
215X250MM

SURFACE
MATT CARVING

WALL TILE

FLOOR TILE



90012 HOPE PLATINA

GLINT

CARVING COLLECTION

COLLECTION BASED ON ORDER COLLECTION



SIZE.
215X250MM


SURFACE
MATT CARVING


WALL TILE

FLOOR TILE


GLINT
CARVING COLLECTION


GLAZED PORCELAIN TILES
WITH LOW WATER ABSORTION E≤0.5%

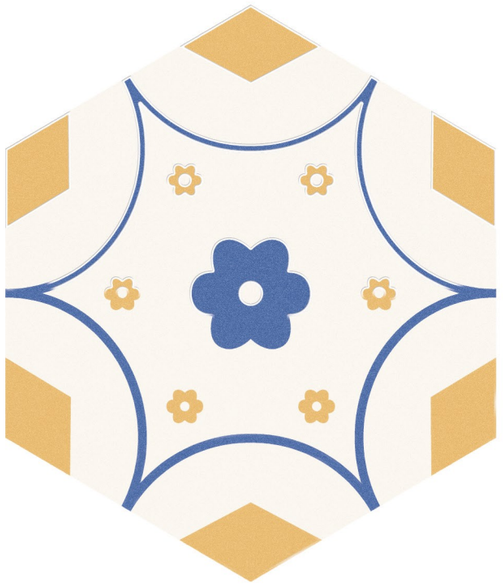

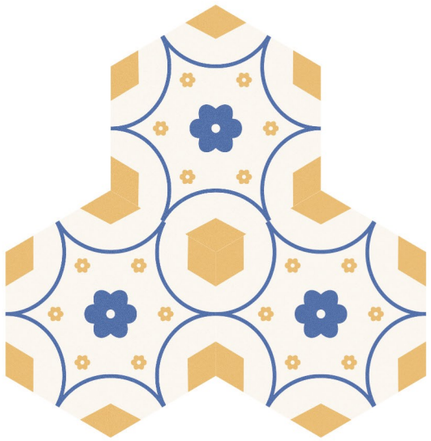


90021 GLINT SUN

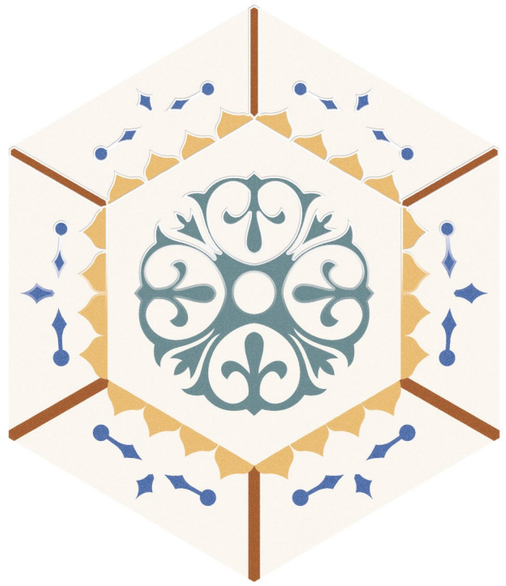

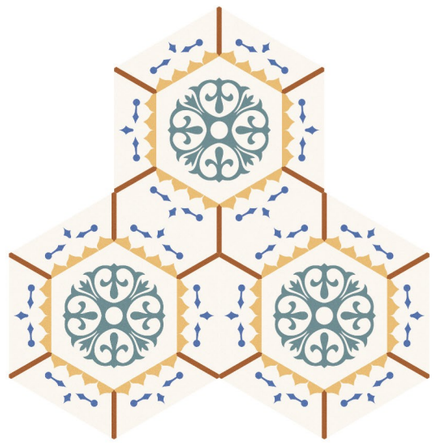

90022 GLINT OASIS

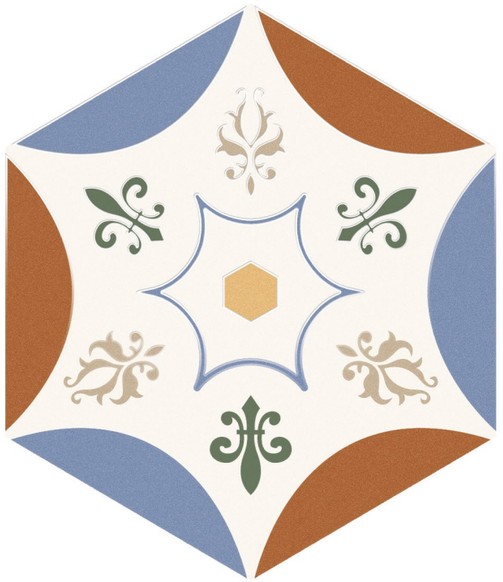



90023 GLINT PLAM





90024 GLINT SORCE

SIZE.
215X250MM


SURFACE
MATT CARVING


WALL TILE

FLOOR TILE


GLINT
CARVING COLLECTION

GLAZED PORCELAIN TILES
WITH LOW WATER ABSORTION E≤0.5%

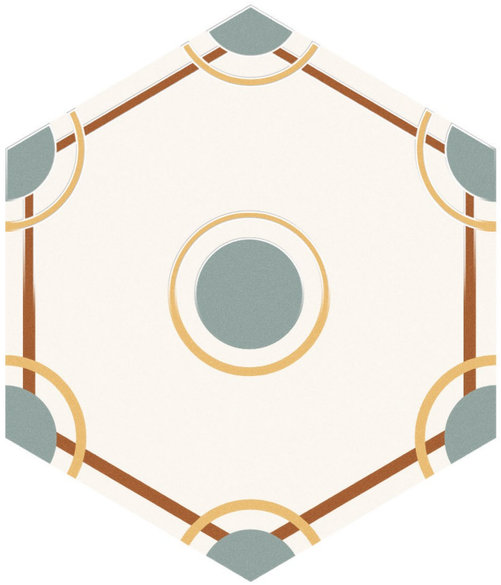

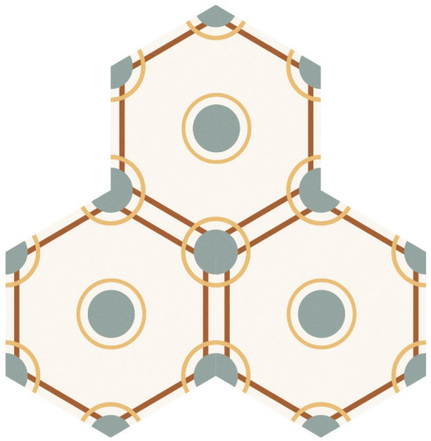


90025 GLINT OCCER

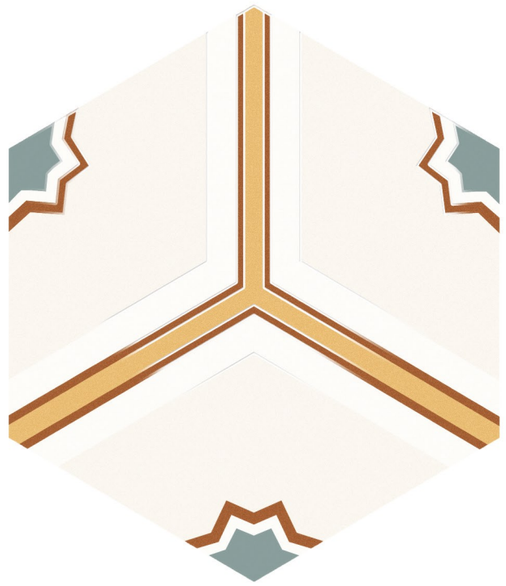



90026 GLINT STAR



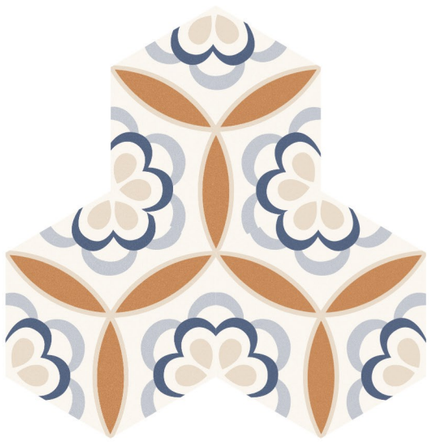

90027 GLINT FLORET





90028 GLINT GEM

SIZE.
215X250MM

SURFACE
MATT CARVING

WALL TILE

FLOOR TILE

90024 GLINT SORCE

90027 GLINT FLORET

PETAL

CARVING COLLECTION

COLLECTION BASED ON ORDER COLLECTION



SIZE.
215X250MM

SURFACE
MATT CARVING

WALL TILE

FLOOR TILE

PETAL
CARVING COLLECTION

GLAZED PORCELAIN TILES
WITH LOW WATER ABSORTION E≤0.5%



90081 PETAL BASE
RANDOM 09





90082 PETAL LEAFLET
RANDOM 09

SIZE.
215X250MM

SURFACE
MATT CARVING

WALL TILE

FLOOR TILE

90082 PETAL LEAFLET

EMERALD

CARVING COLLECTION

COLLECTION IN STOCK COLLECTION



SIZE.
215X250MM


SURFACE
MATT CARVING


WALL TILE

FLOOR TILE


EMERALD
CARVING COLLECTION


GLAZED PORCELAIN TILES
WITH LOW WATER ABSORTION E≤0.5%

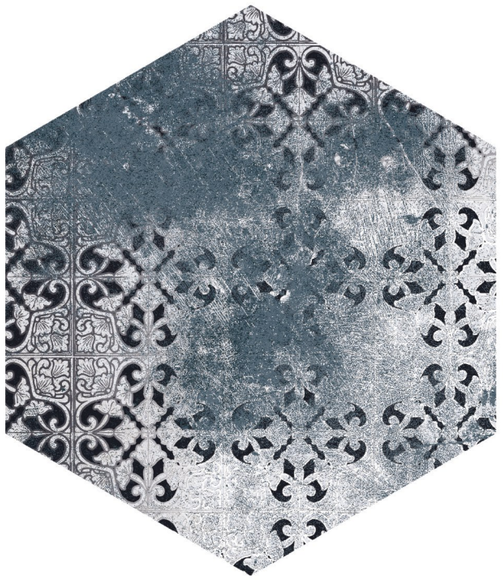

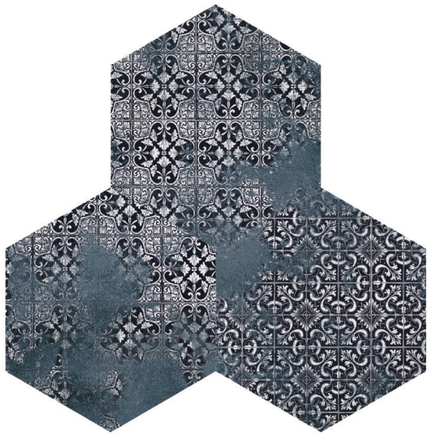



90131 EMERALD AQUA

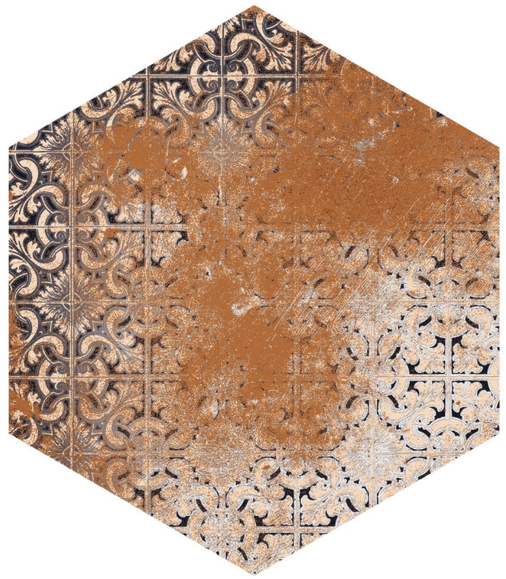

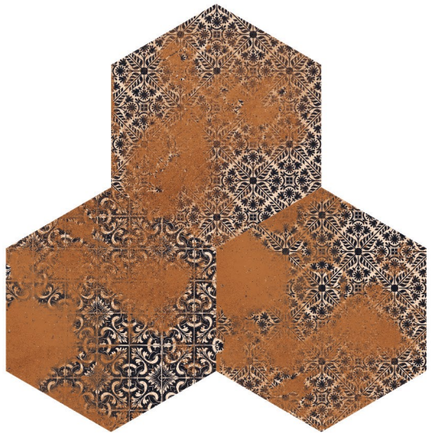



90132 EMERALD BROWN

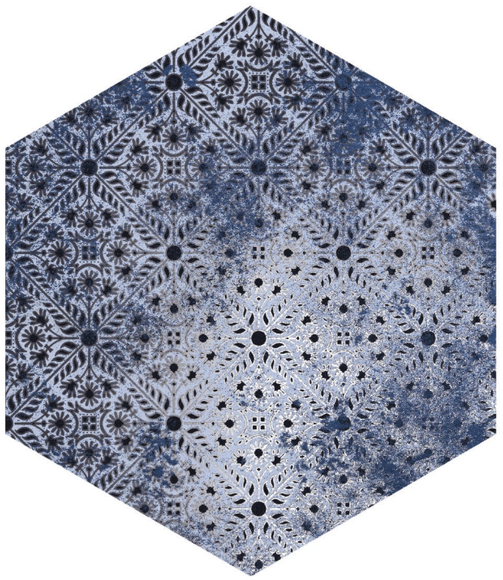

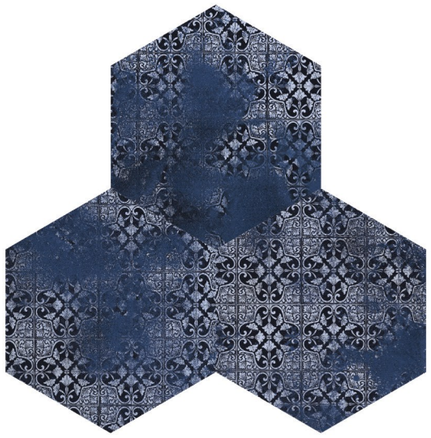

90133 EMERALD BLUE

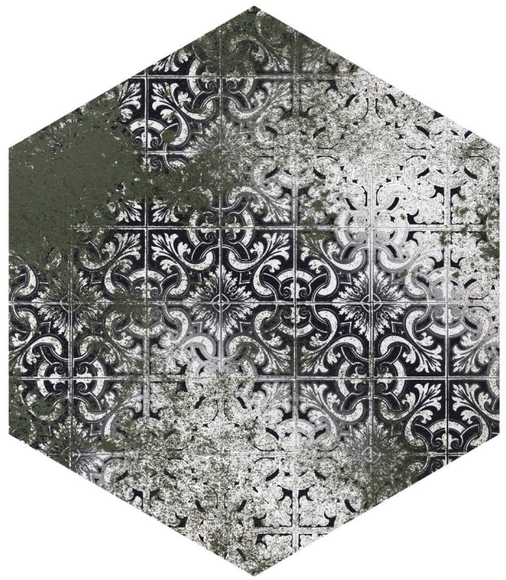

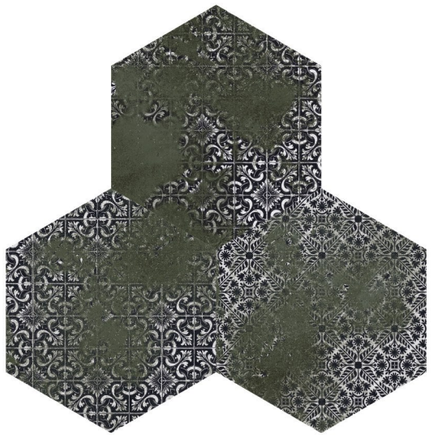

90134 EMERALD GREEN

SIZE.
215X250MM

SURFACE
MATT CARVING

WALL TILE

FLOOR TILE

90132 EMERALD BROWN

90133 EMERALD BLUE

CHARACTERISTICS OF GLAZED PORCELAIN TILES

DRY-PRESSED CERAMIC TILES, WITH LOW WATER ABSORTION≤0.5%,
FOR INTERNAL AND EXTERNAL WALLS AND FLOORS

Fire Reaction	Class A1
Breaking Strength	≥1300 N
Thermal Shock Resistance	PASS
Durability For:	
Indoor Uses	PASS
Outdoor Uses	PASS
Frost Resistance	PASS
Resistance to Chemical for Household use and Swimming Pool Salts	ISO 10545-13 GA
Resistance to Low Concentrations of Acids and Alkalis	ISO 10545-13 GLA
Resistance to High Concentrations of Acids and Alkalis	ISO 10545-13 GHA
Stain Resistance	ISO 10545-14 Class 5

PACKAGING DETAILS

SIZE	THICKNESS	PIECES/BOX	SQM./BOX	SQFT./BOX	KG/BOX
215X250MM (8.5"X10")	8.00MM	10	0.40	4.3	7.00

Note :

- Size / shade variation is inherent in porcelain tiles , in case of any complain its should be brought to our dealer's notice before laying the tiles.
- Colour shown are indicative only. Check actual tiles for exact colour.
- The information contained in this catalogue are accurate as possible, but cannot be considered as legally binding.
- Customers are advised to inspect a sample of the tile before ordering.
- The company reserves the right to change the specifications without prior notice.

Exterior Elevation or interior Walls & Floors



TILE FIXING INSTRUCTIONS

It is necessary to use an appropriate adhesive and grouting material for each product An initial approach must be made before starting the installation and take into account the type of joint, structural, perimeter, expansion and installation that must be used for each use. We advise that to obtain an optimal result a 1.5 mm joint should be used.

Once the placement is finished: it is recommended to remove the remains of adhesive material and specific grouting for each material, following the manufacturer's instructions for these products.

In general, powder detergents and aggressive scouring pads should not be used for cleaning.
It is enough to clean the tiles with a sponge, warm water and a neutral liquid soap. Finally, rinse with clean water.

