GLAZED PORCELAIN TILES

HEXAGON 215X 250MM

(MATT)

COLLECTION ' **24**

COOL
COLLECTION

COTTO
COLLECTION

ENVO
COLLECTION

STRING
COLLECTION

SOLID COLOR
COLLECTION

SIZE.
215X250MM

SURFACE
MATT

WALL TILE

FLOOR TILE

COOL
COLLECTION

COLLECTION
BASED ON ORDER
COLLECTION



SIZE.
215X250MM


SURFACE
MATT

WALL TILE

FLOOR TILE

COOL
COLLECTION


GLAZED PORCELAIN TILES
WITH LOW WATER ABSORTION E≤0.5%

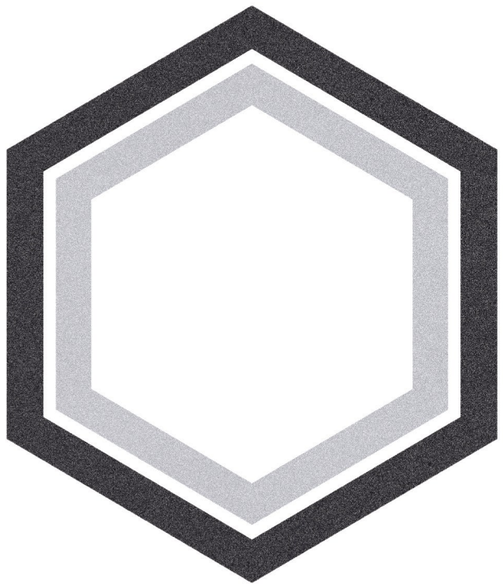





90061 COOL HONEYCOMB



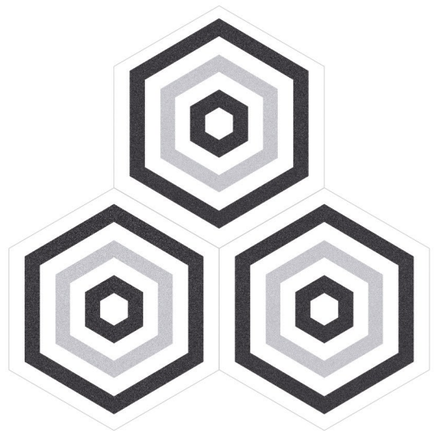

90062 COOL TARGET

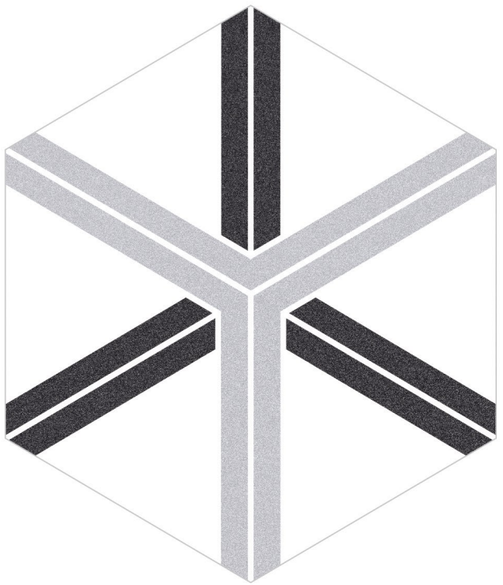

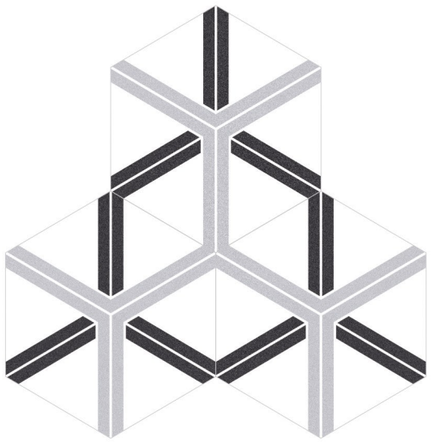

90063 COOL PLOT





90064 COOL RUNUP

SIZE.
215X250MM

SURFACE
MATT

WALL TILE

FLOOR TILE



90062 COOL TARGET



90063 COOL PLOT

COTTO
COLLECTION



SIZE.
215X250MM


SURFACE
MATT


WALL TILE

FLOOR TILE


COTTO
COLLECTION


GLAZED PORCELAIN TILES
WITH LOW WATER ABSORTION E≤0.5%

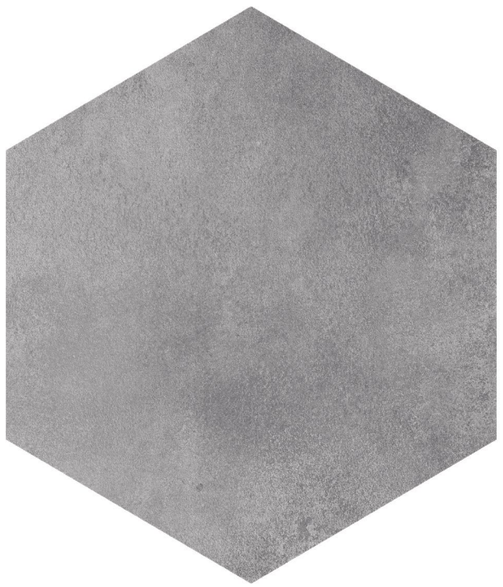

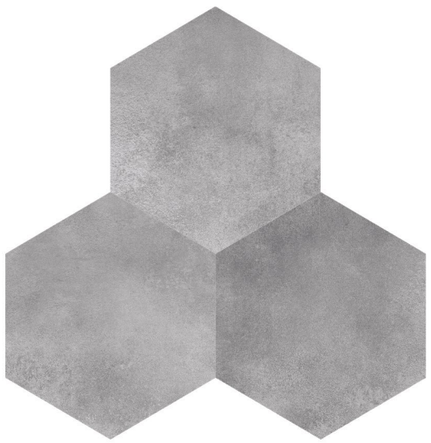

90002 COTTO CHARCOAL
RANDOM 08

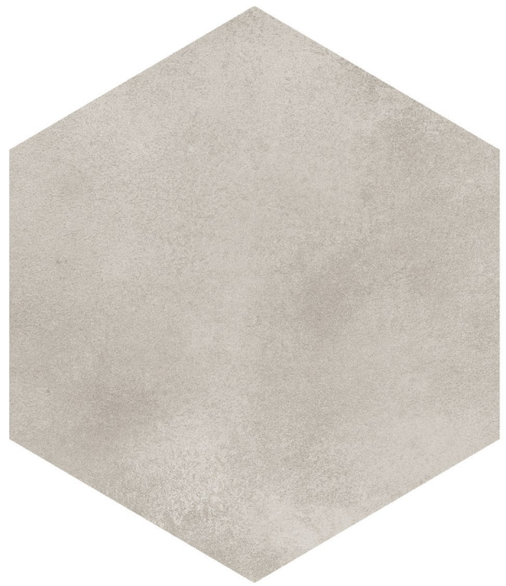


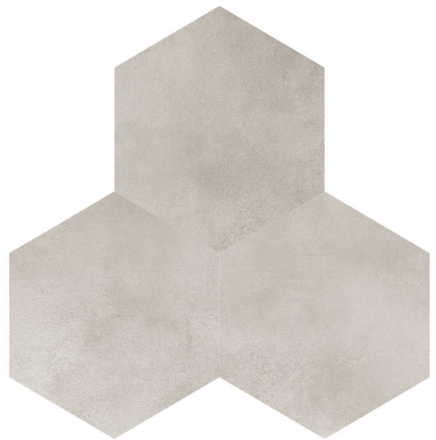

90006 COTTO BACCO
RANDOM 08

90004 COTTO BIANCO
RANDOM 08



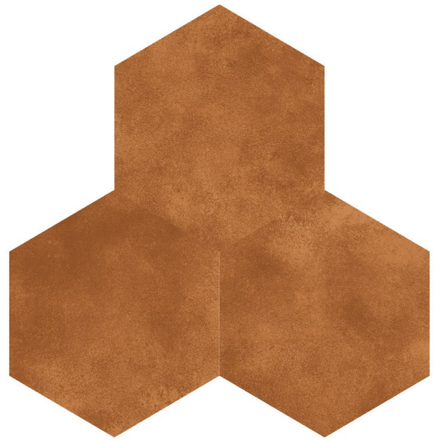

90111 COTTO BROWN
RANDOM 09

SIZE.
215X250MM


SURFACE
MATT

WALL TILE

FLOOR TILE


COTTO
COLLECTION


GLAZED PORCELAIN TILES
WITH LOW WATER ABSORTION E≤0.5%

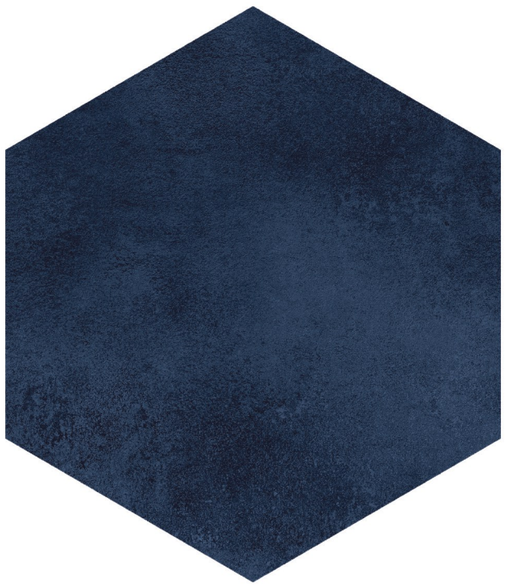




90112 COTTO BLUE
RANDOM 09

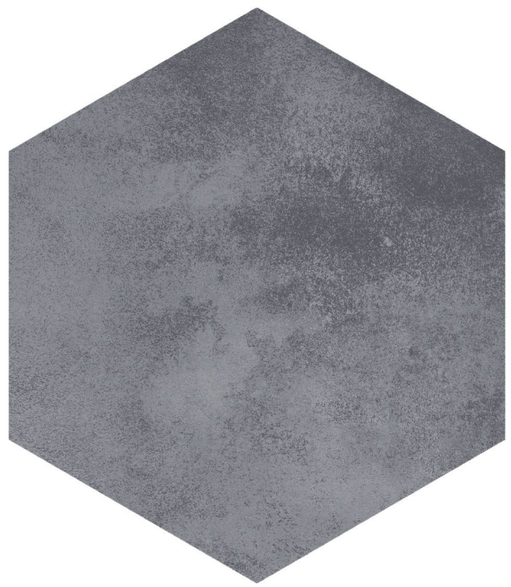

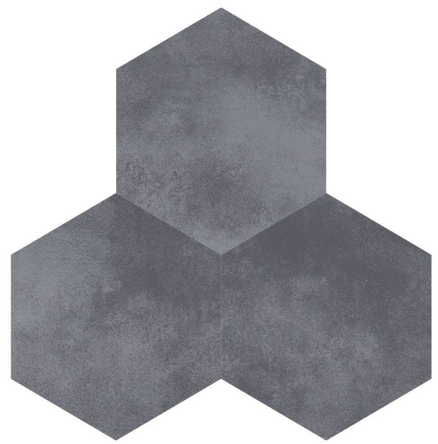



90114 COTTO STEEL GREY
RANDOM 09



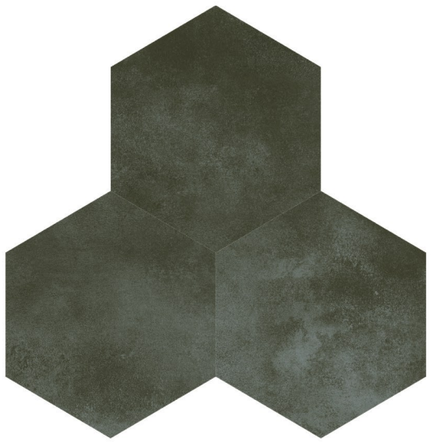

90113 COTTO GREEN
RANDOM 09

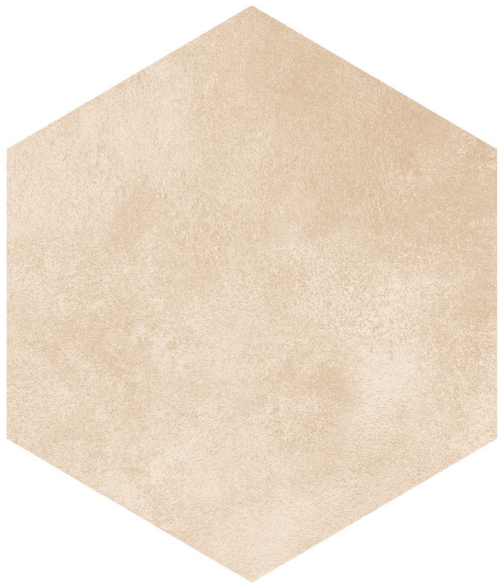

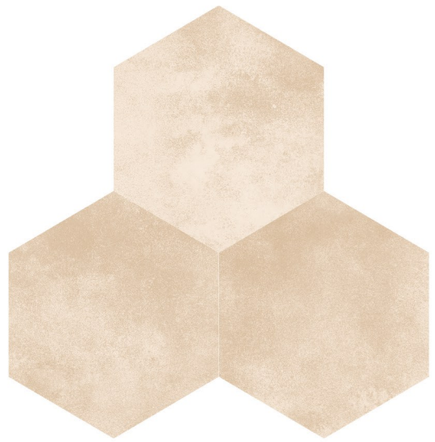

90115 COTTO IVORY
RANDOM 09

SIZE.
215X250MM

SURFACE
MATT

WALL TILE

FLOOR TILE

90002 COTTO CHARCOAL

90006 COTTO BACCO

90112 COTTO BLUE

90113 COTTO GREEN



90115 COTTO IVORY

ENVO
COLLECTION

COLLECTION
BASED ON ORDER
COLLECTION



SIZE.
215X250MM

SURFACE
MATT

WALL TILE

FLOOR TILE

ENVO
COLLECTION

GLAZED PORCELAIN TILES
WITH LOW WATER ABSORTION E≤0.5%





90051 ENVO GREEN
RANDOM 03





90052 ENVO IVORY
RANDOM 03

SIZE.
215X250MM

SURFACE
MATT


WALL TILE

FLOOR TILE

90051 ENVO GREEN

STRING
COLLECTION

COLLECTION
BASED ON ORDER
COLLECTION

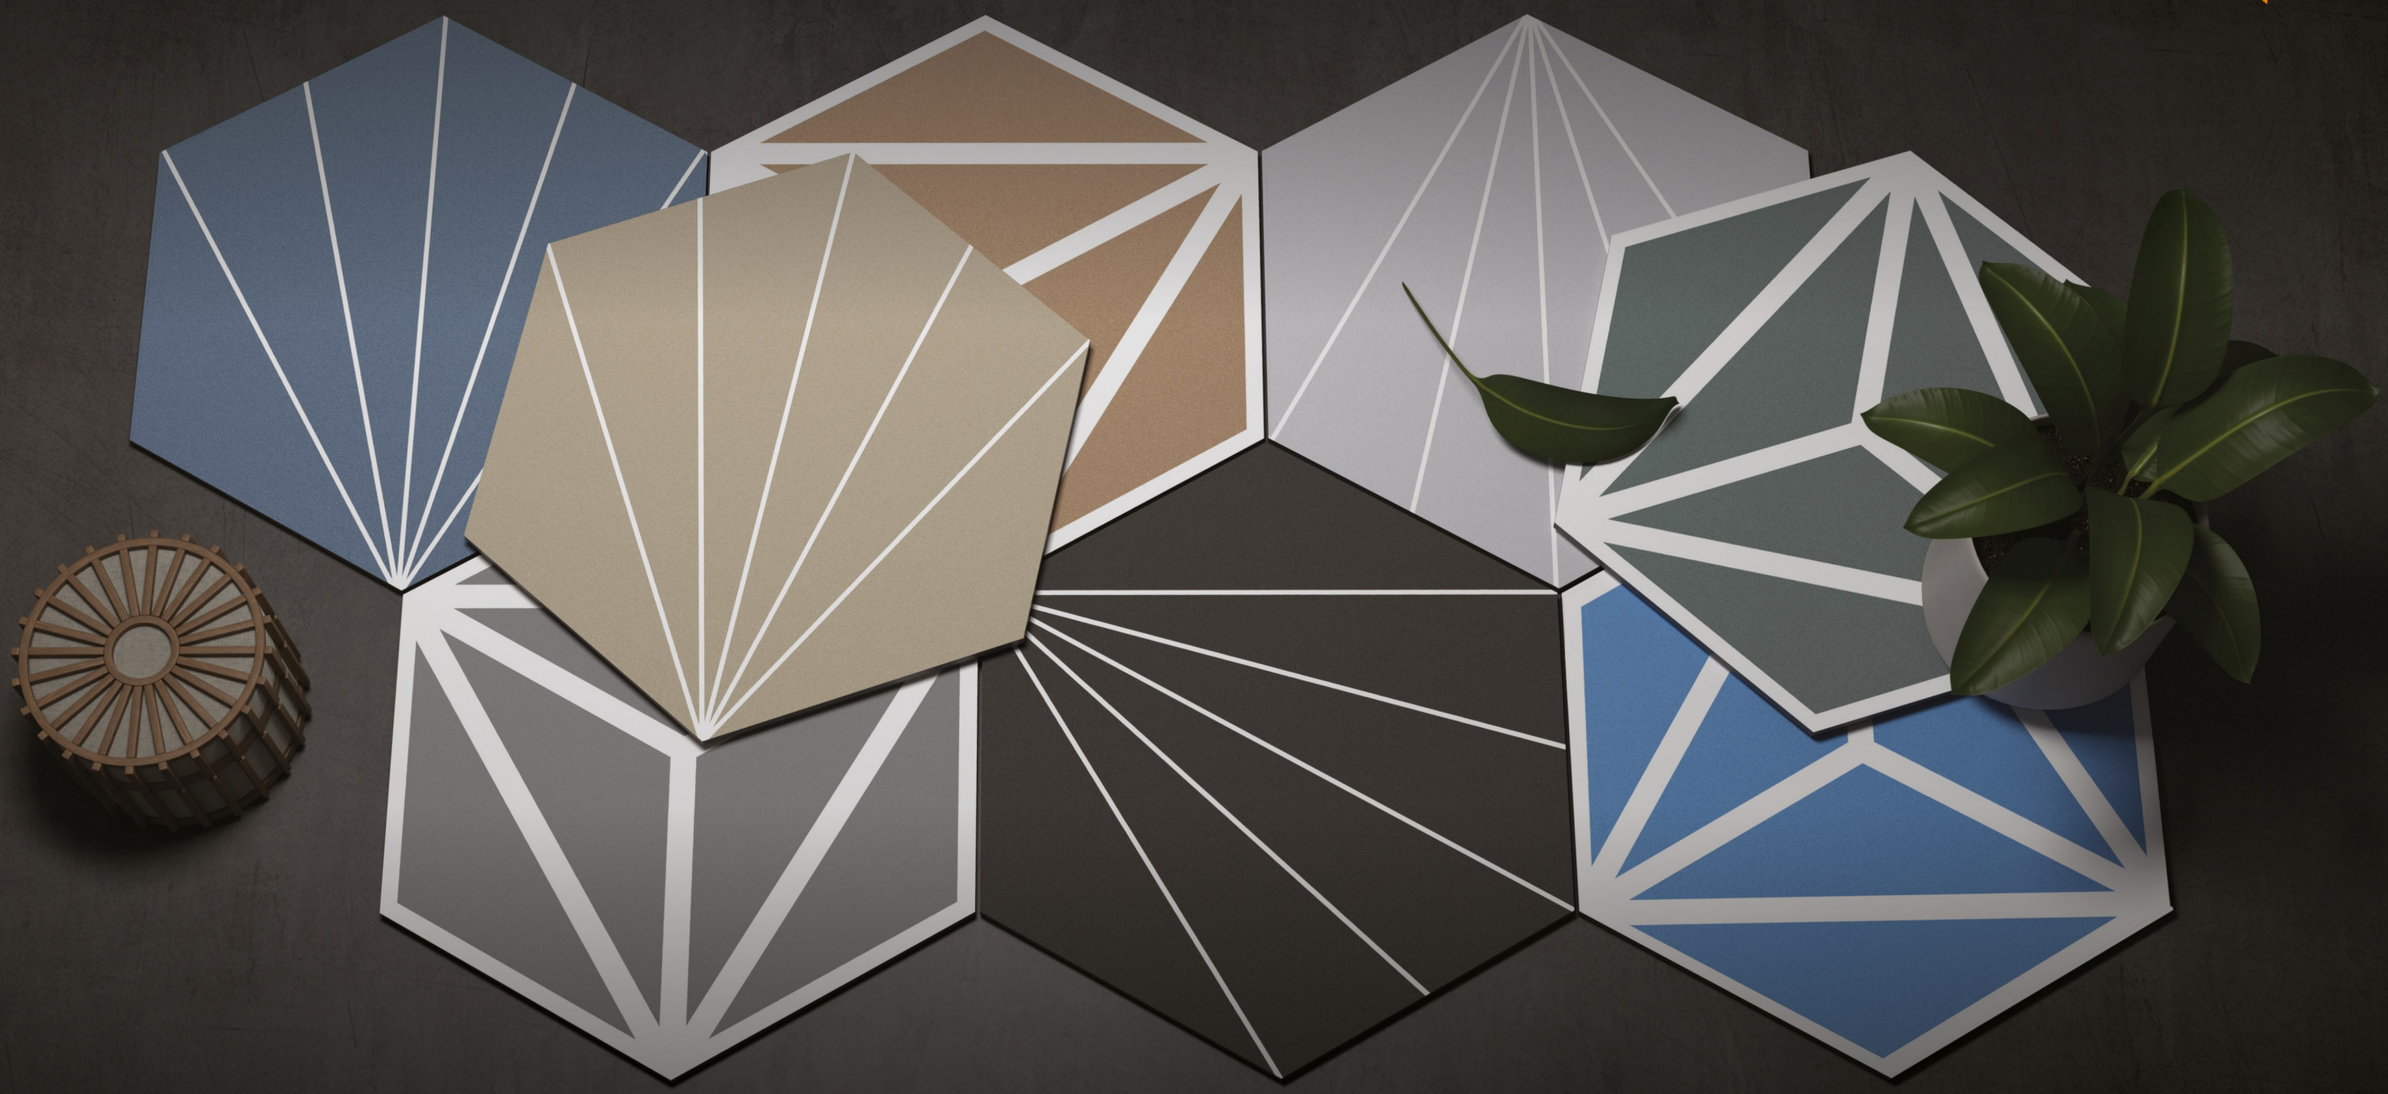

SIZE.
215X250MM

SURFACE
MATT


WALL TILE


FLOOR TILE

STRING
COLLECTION


GLAZED PORCELAIN TILES
WITH LOW WATER ABSORTION E≤0.5%


90031 STRING RIM SILVER

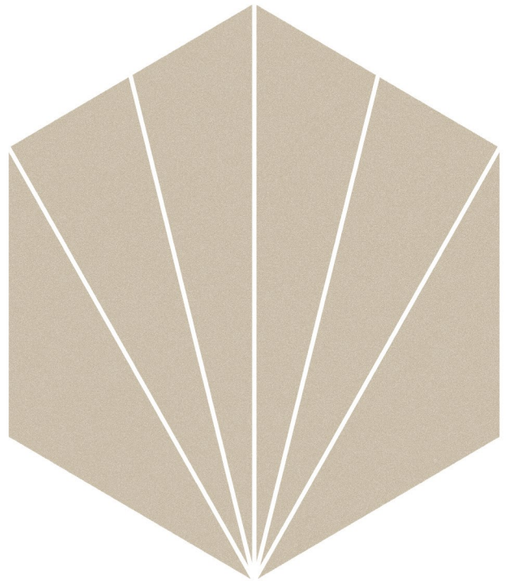

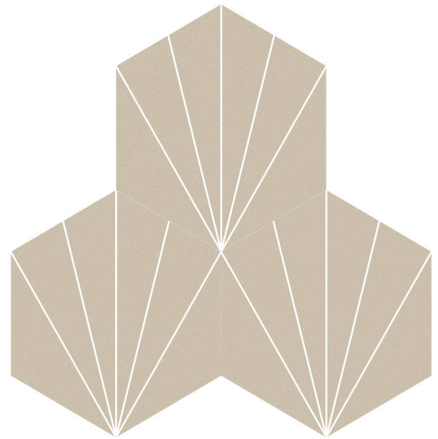



90032 STRING RIM BEING

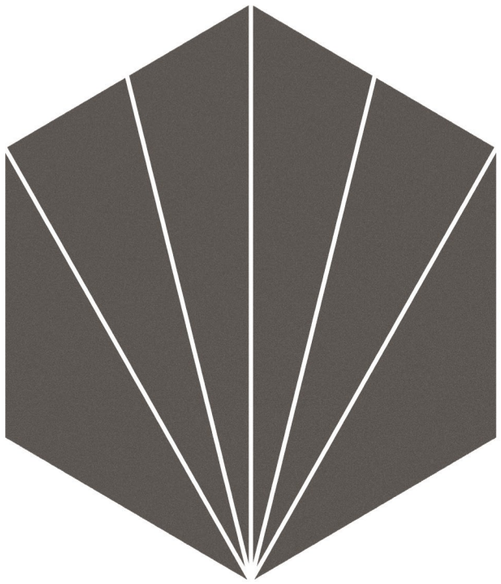

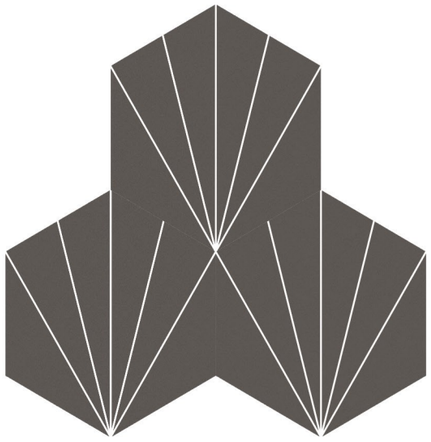

90033 STRING RIM CHARCOAL

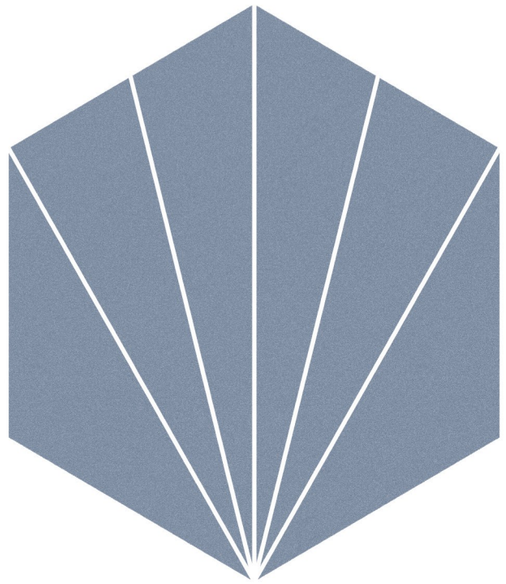

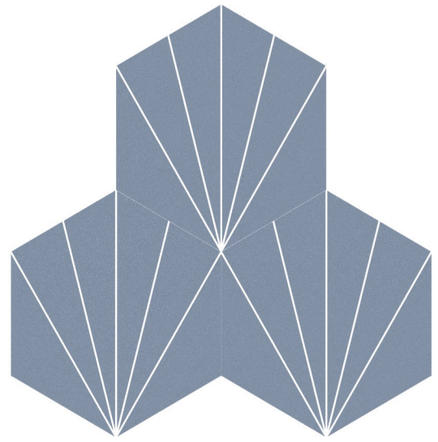

90034 STRING RIM SLATE BLUE

SIZE.
215X250MM

SURFACE
MATT

WALL TILE


FLOOR TILE


90032 STRING RIM BEING

90033 STRING RIM CHARCOAL


STRING
COLLECTION


GLAZED PORCELAIN TILES
WITH LOW WATER ABSORTION E≤0.5%

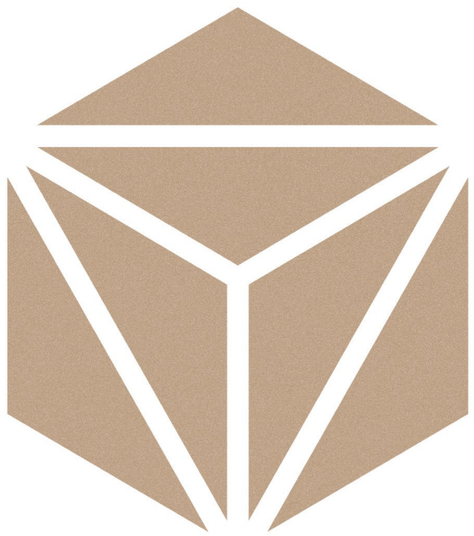

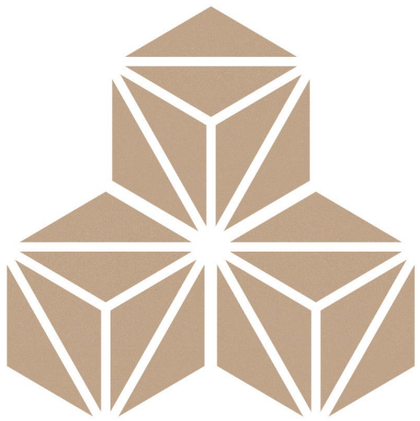



90041 STRING CORD MOCHA

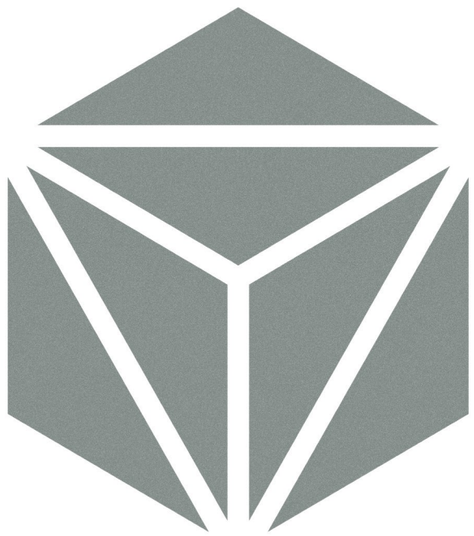

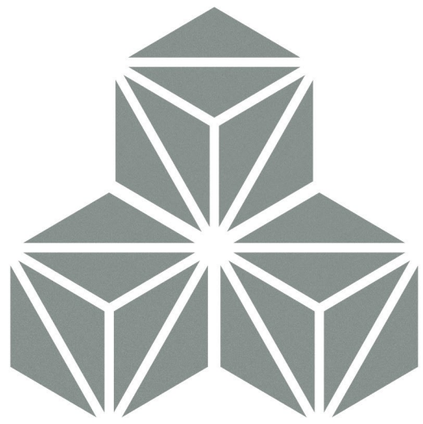


90042 STRING CORD AQUA

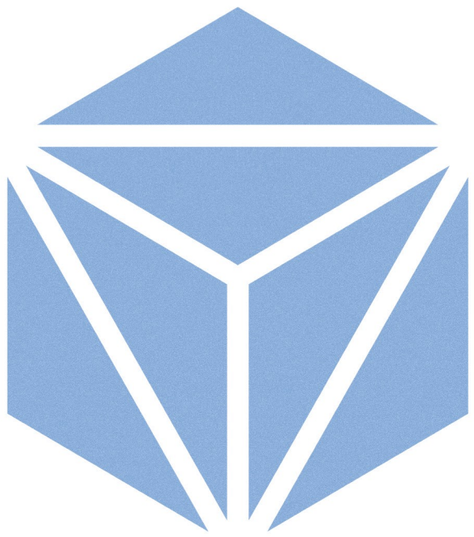

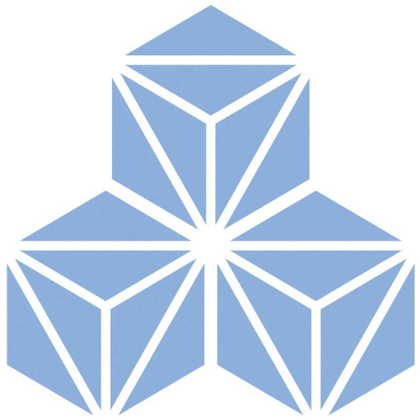

90044 STRING CORD SKYBLUE

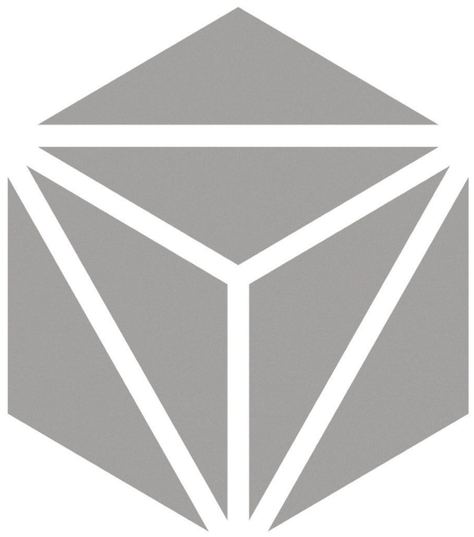



90045 STRING CORD STEEL GREY

SIZE.
215X250MM

SURFACE
MATT

WALL TILE

FLOOR TILE

90045 STRING CORD STEEL GREY

90044 STRING CORD SKYBLUE

SOLID COLOR
COLLECTION





SIZE.
215X250MM


SURFACE
MATT


WALL TILE

FLOOR TILE

SOLID COLOR
COLLECTION

GLAZED PORCELAIN TILES
WITH LOW WATER ABSORTION E≤0.5%

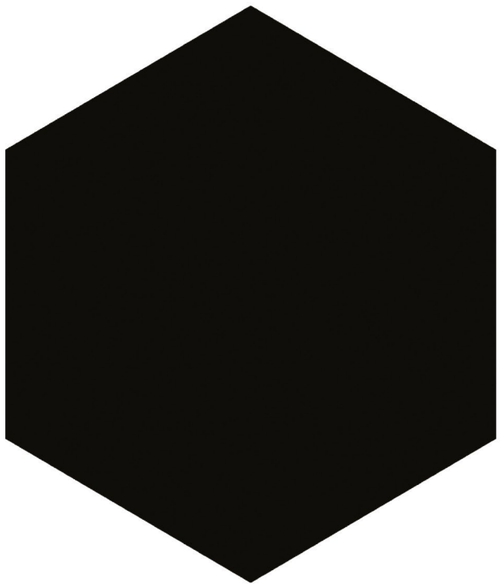

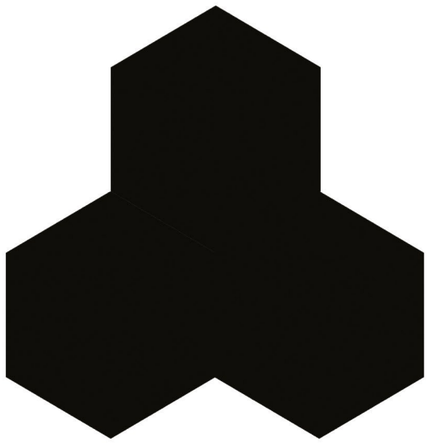

PLAIN BLACK

PLAIN WHITE

SIZE.
215X250MM

SURFACE
MATT

WALL TILE

FLOOR TILE

PLAIN WHITE



PLAIN BLACK & PLAIN WHITE

CHARACTERISTICS OF GLAZED PORCELAIN TILES

DRY-PRESSED CERAMIC TILES, WITH LOW WATER ABSORTION≤0.5%,
FOR INTERNAL AND EXTERNAL WALLS AND FLOORS

Fire Reaction	Class A1
Breaking Strength	≥1300 N
Thermal Shock Resistance	PASS
Durability For:	
Indoor Uses	PASS
Outdoor Uses	PASS
Frost Resistance	PASS
Resistance to Chemical for Household use and Swimming Pool Salts	ISO 10545-13 GA
Resistance to Low Concentrations of Acids and Alkalis	ISO 10545-13 GLA
Resistance to High Concentrations of Acids and Alkalis	ISO 10545-13 GHA
Stain Resistance	ISO 10545-14 Class 5

PACKAGING DETAILS

SIZE	THICKNESS	PIECES/BOX	SQM./BOX	SQFT./BOX	KG/BOX
215X250MM (8.5"X10")	8.00MM	10	0.40	4.3	7.00

Note :

- Size / shade variation is inherent in porcelain tiles , in case of any complain its should be brought to our dealer's notice before laying the tiles.
- Colour shown are indicative only. Check actual tiles for exact colour.
- The information contained in this catalogue are accurate as possible, but cannot be considered as legally binding.
- Customers are advised to inspect a sample of the tile before ordering.
- The company reserves the right to change the specifications without prior notice.

Exterior Elevation or interior Walls & Floors



TILE FIXING INSTRUCTIONS

It is necessary to use an appropriate adhesive and grouting material for each product An initial approach must be made before starting the installation and take into account the type of joint, structural, perimeter, expansion and installation that must be used for each use. We advise that to obtain an optimal result a 1.5 mm joint should be used.

Once the placement is finished: it is recommended to remove the remains of adhesive material and specific grouting for each material, following the manufacturer's instructions for these products.

In general, powder detergents and aggressive scouring pads should not be used for cleaning.
It is enough to clean the tiles with a sponge, warm water and a neutral liquid soap. Finally, rinse with clean water.

