
BUILT TO MAKE A
STYLE STATEMENT



SALT & PEPPER COLLECTION

FULL BODY VITRIFIED TILES

300X300MM (MATT)

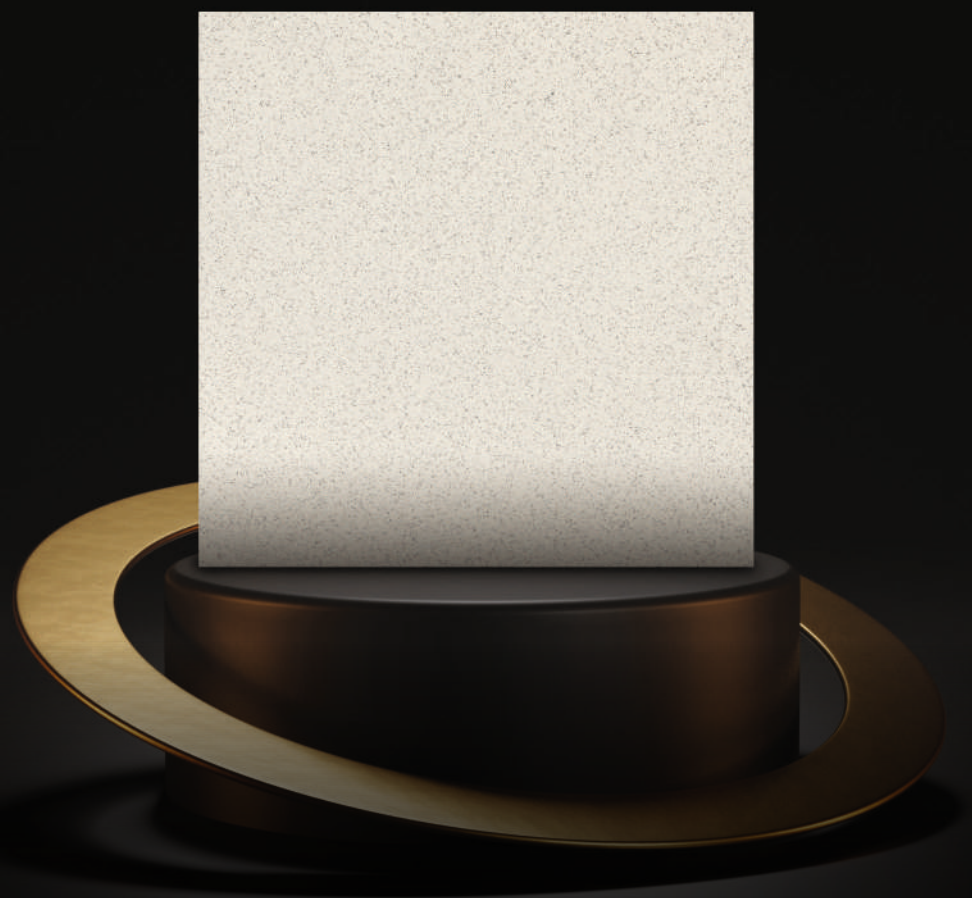


SALT & PEPPER

COLLECTION

Explore the magnificent full body tiles of this collection that has matt finish and also has range of shades. It comes in 300x300mm size and also different thickness options with fascinating designs.

300X 300MM

FULLBODY VITRIFIED TILES

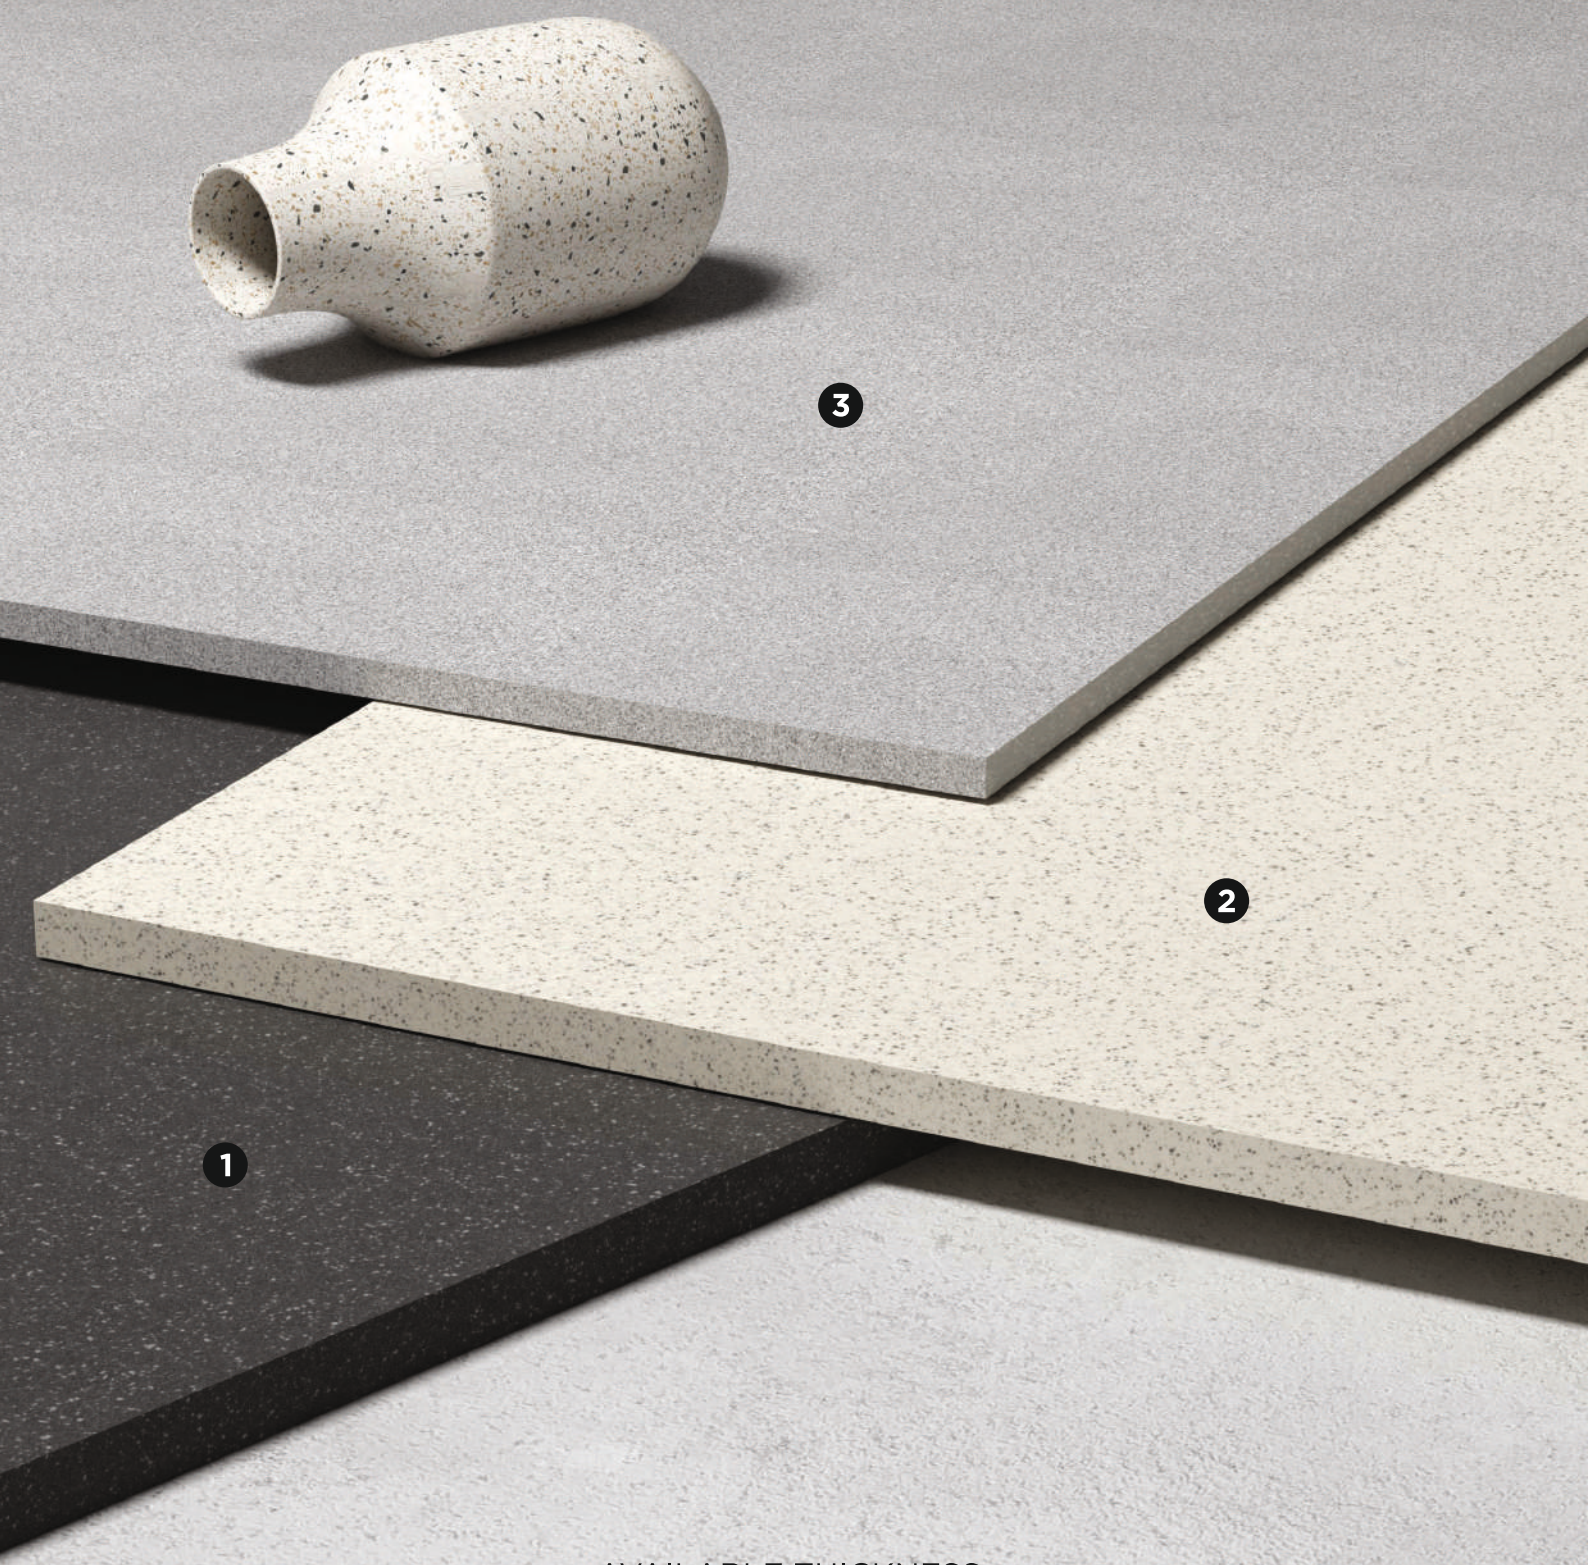

AVAILABLE THICKNESS:

1	2	3
12mm	10mm	8mm

We offer surfaces with three distinctive thickness
that suits diverse space. It shows its strength and durability
that will make us perfect choice for every needs.

INDEX

ERMANE WHITE

ODEL SAND

SILVER GREY

LASEN GRAPHITE

MIST GREY

AREO GREY

CEMENT GREY

ANTIQUE GREY

MASHROOM CREAM

APPLICATION


Flooring Heavy Traffic Area



Indoor


Outdoor


Swimming Pools Decks


Garden & Corridors


Step & Riser



Kitchen Areas


Living Area

SALT & PEPPER
COLLECTION

FULLBODY
VITRIFIED
TILES

ERMANE WHITE

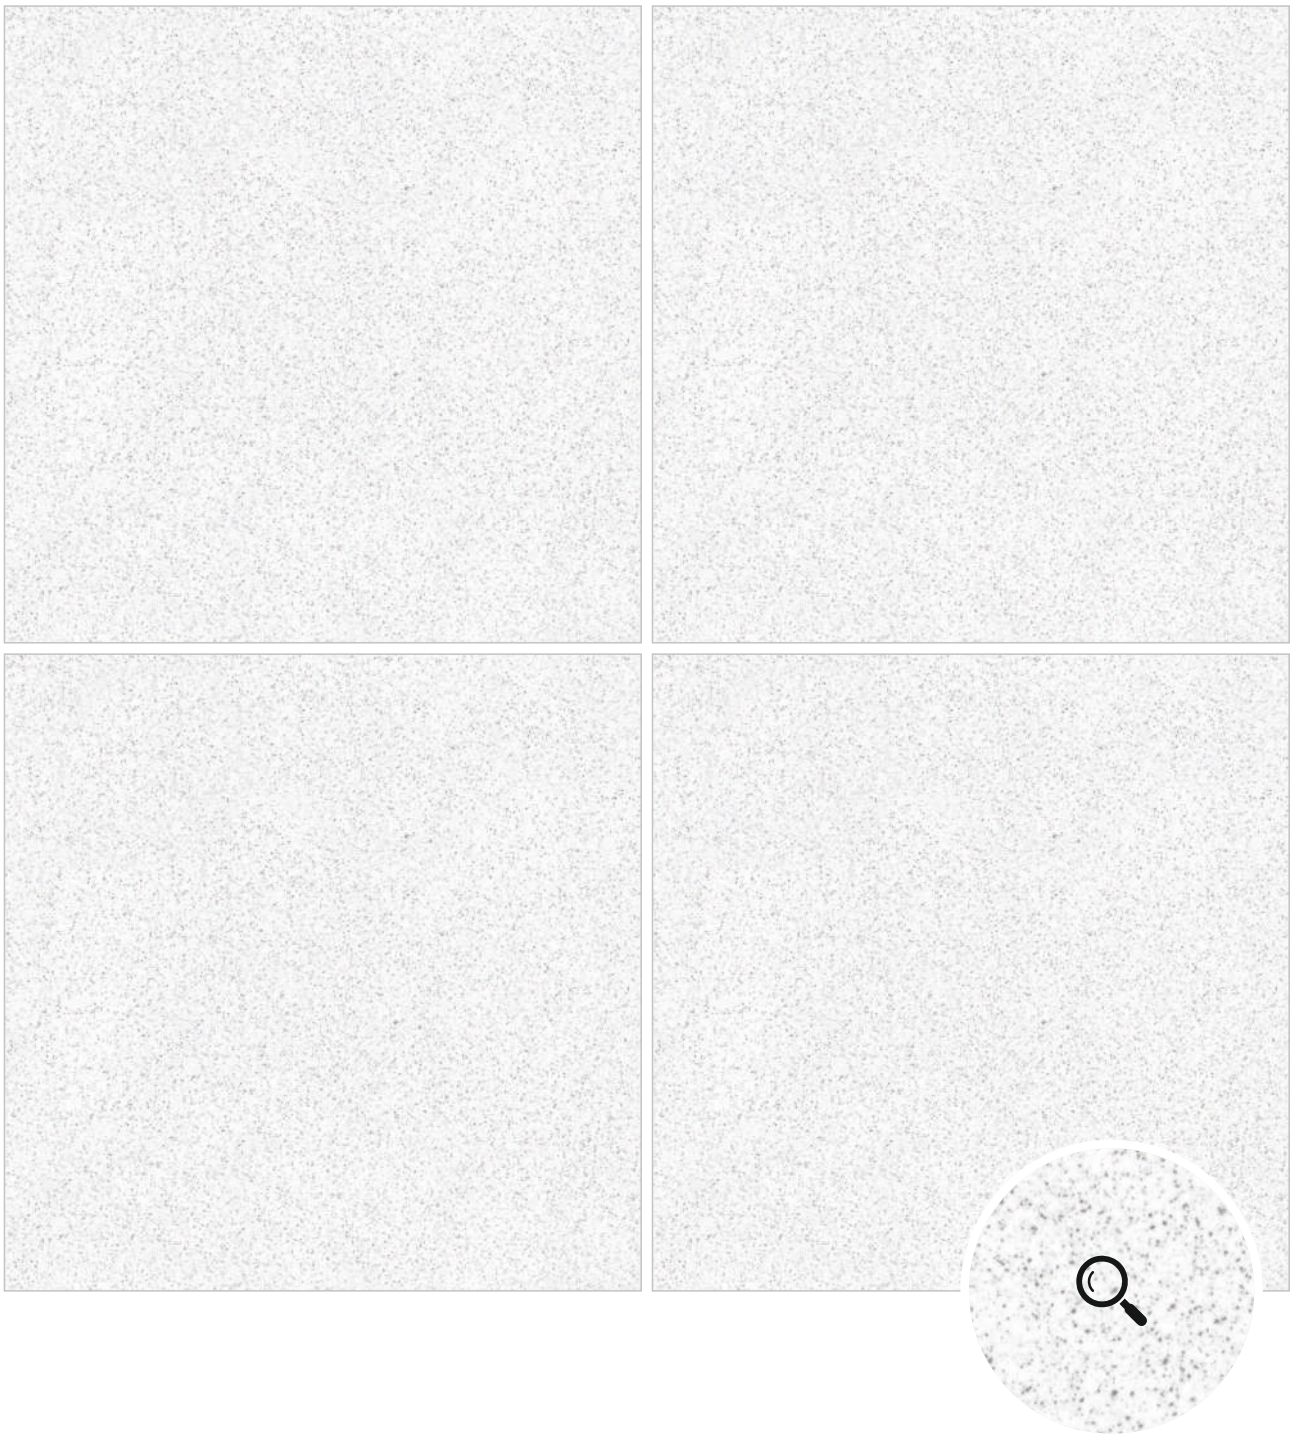

SIZE:	THICKNESS:	SURFACE	TEXTURE
300x300mm	**8mm I 10mm I 12mm**	**MATT**	**PLAIN**




ERMANE
WHITE

SALT & PEPPER
COLLECTION

FULLBODY
VITRIFIED
TILES

ODEL
SAND

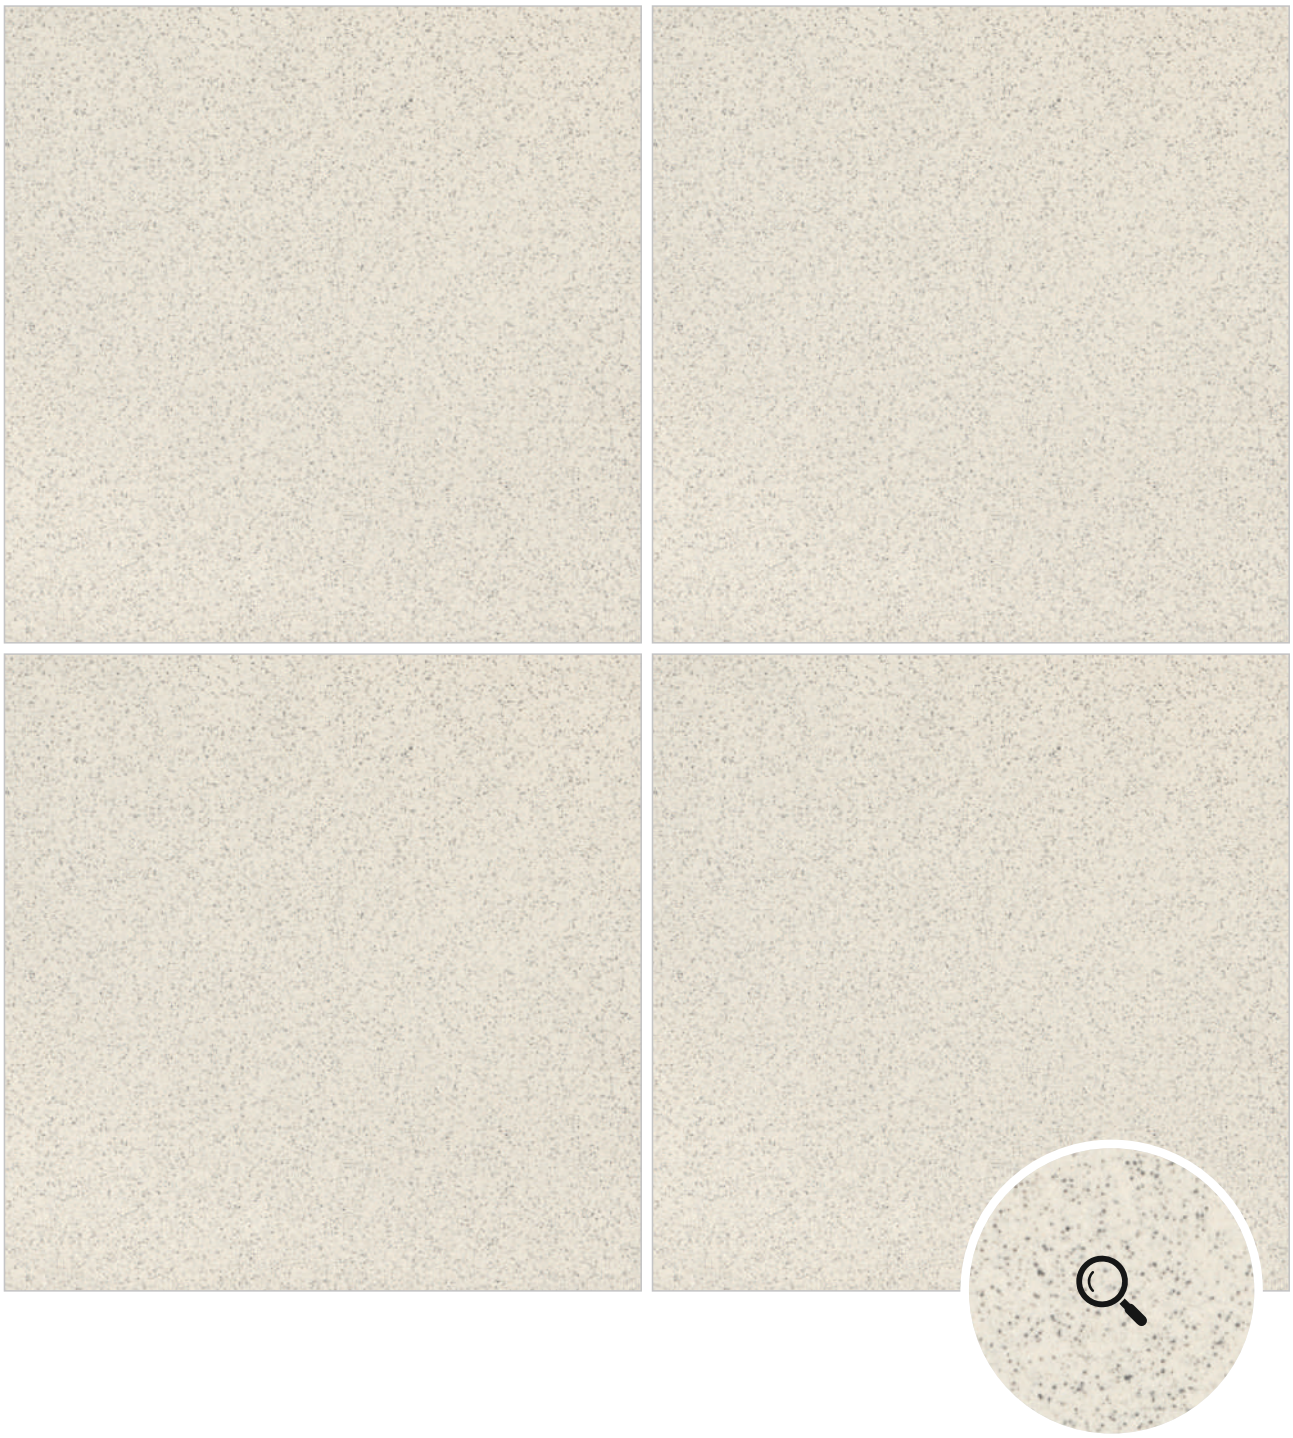

SIZE:	THICKNESS:	SURFACE	TEXTURE
300x300mm	**8mm I 10mm I 12mm**	**MATT**	**PLAIN**




ODEL
SAND

SALT & PEPPER
COLLECTION

FULLBODY
VITRIFIED
TILES

LASEN
GRAPHITE

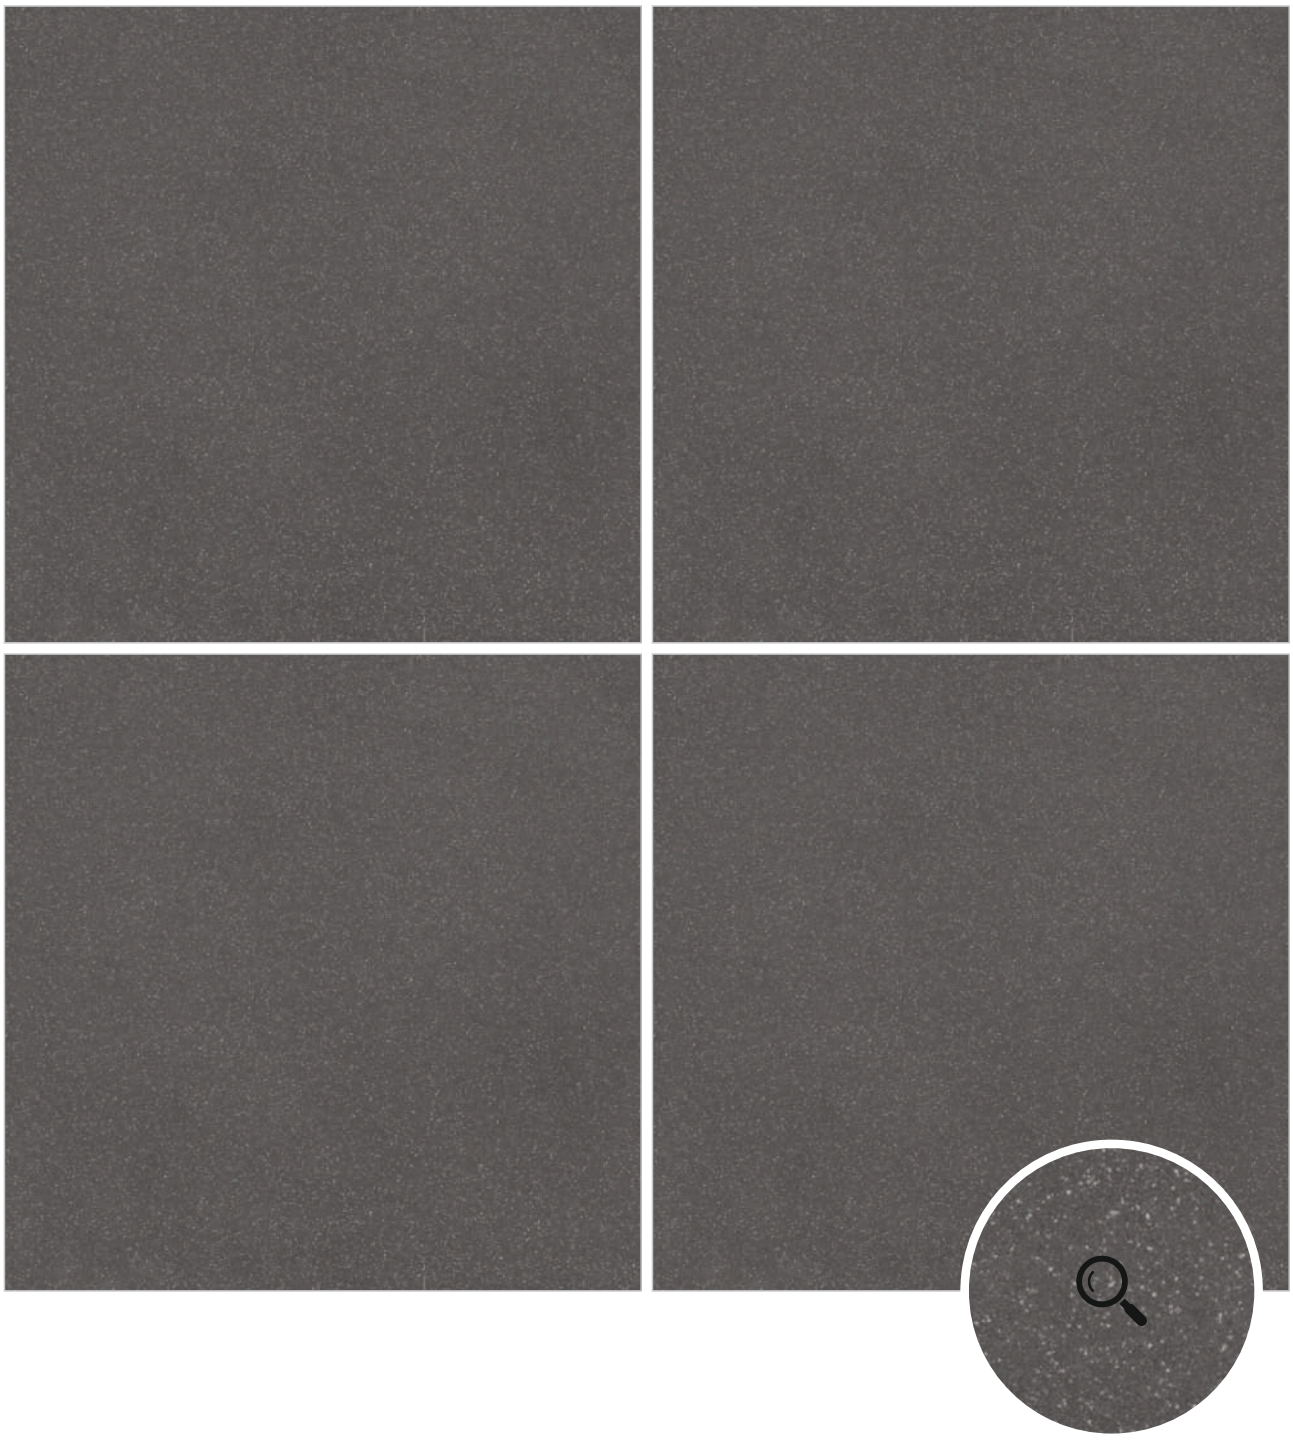

SIZE:	THICKNESS:	SURFACE	TEXTURE
300x300mm	**8mm I 10mm I 12mm**	**MATT**	**PLAIN**




LASEN
GRAPHITE

SALT & PEPPER
COLLECTION

FULLBODY
VITRIFIED
TILES

SILVER GREY

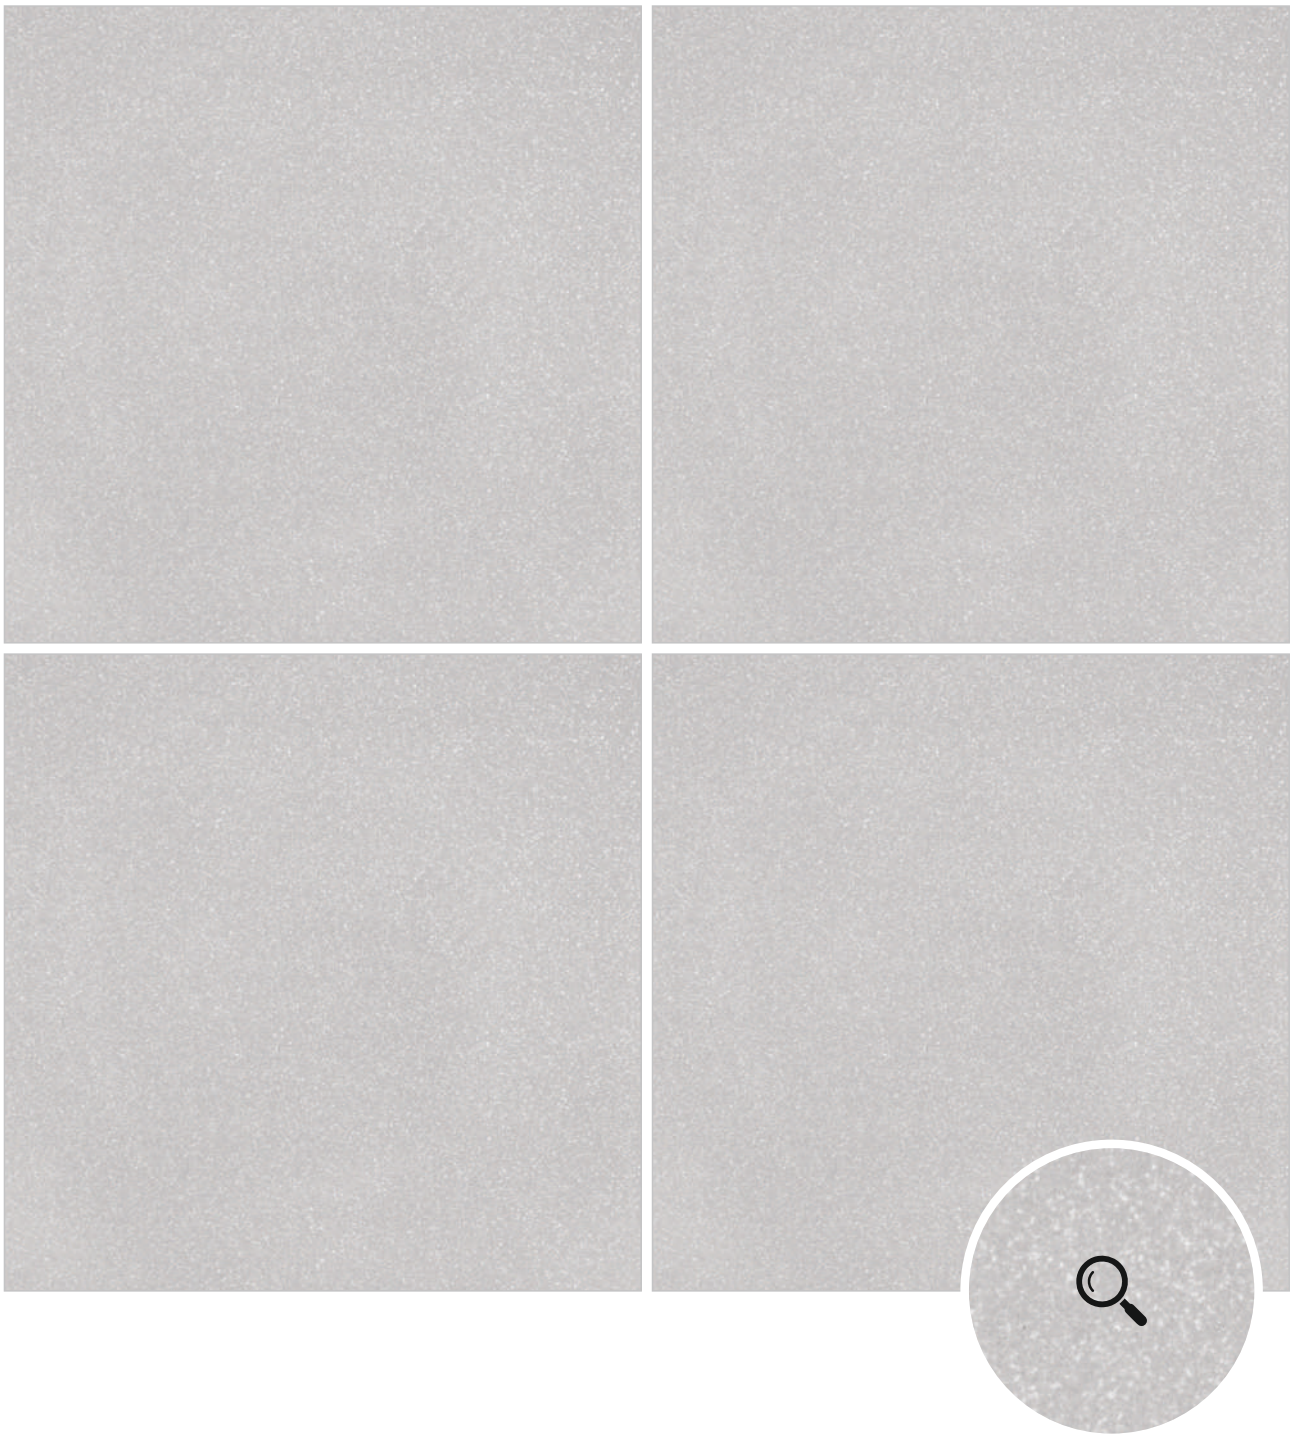

SIZE:	THICKNESS:	SURFACE	TEXTURE
300x300mm	**8mm I 10mm I 12mm**	**MATT**	**PLAIN**




SILVER
GREY

SALT & PEPPER
COLLECTION

FULLBODY
VITRIFIED
TILES

MIST GREY

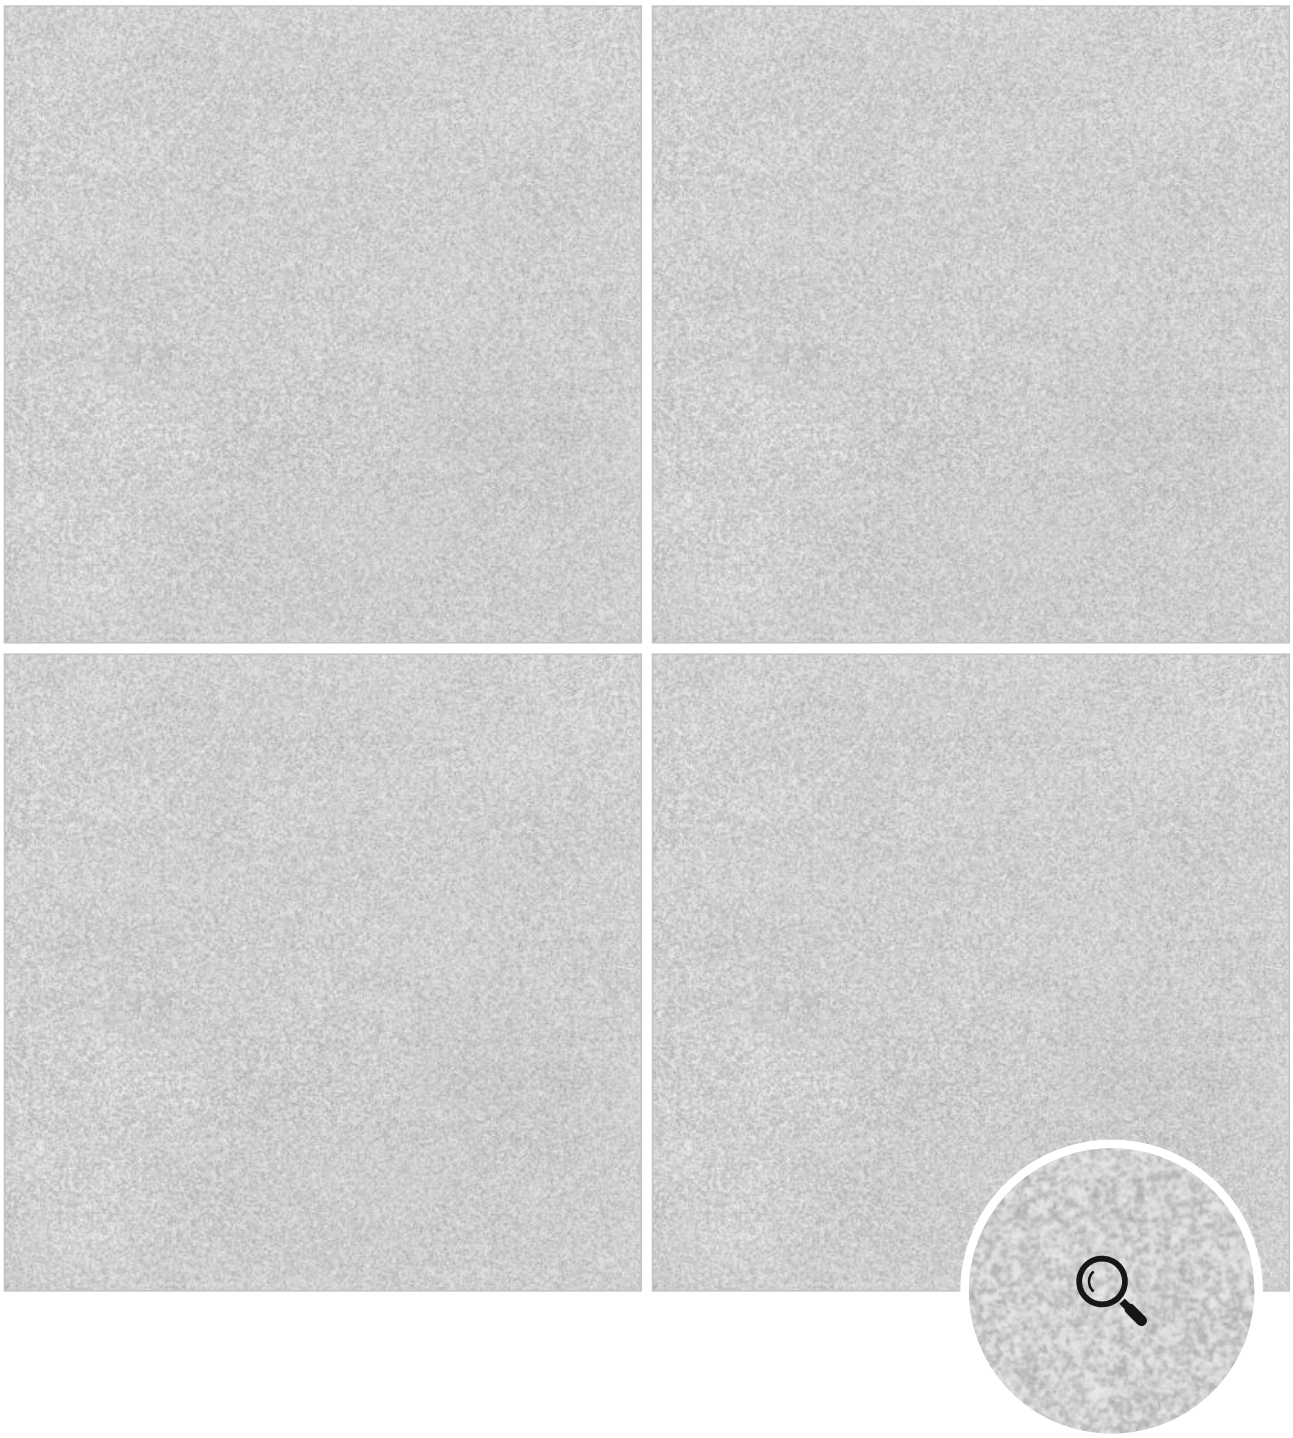

SIZE:	THICKNESS:	SURFACE	TEXTURE
300x300mm	**8mm | 10mm | 12mm**	**MATT**	**PLAIN**




MIST
GREY

SALT & PEPPER
COLLECTION

FULLBODY
VITRIFIED
TILES

AREO GREY

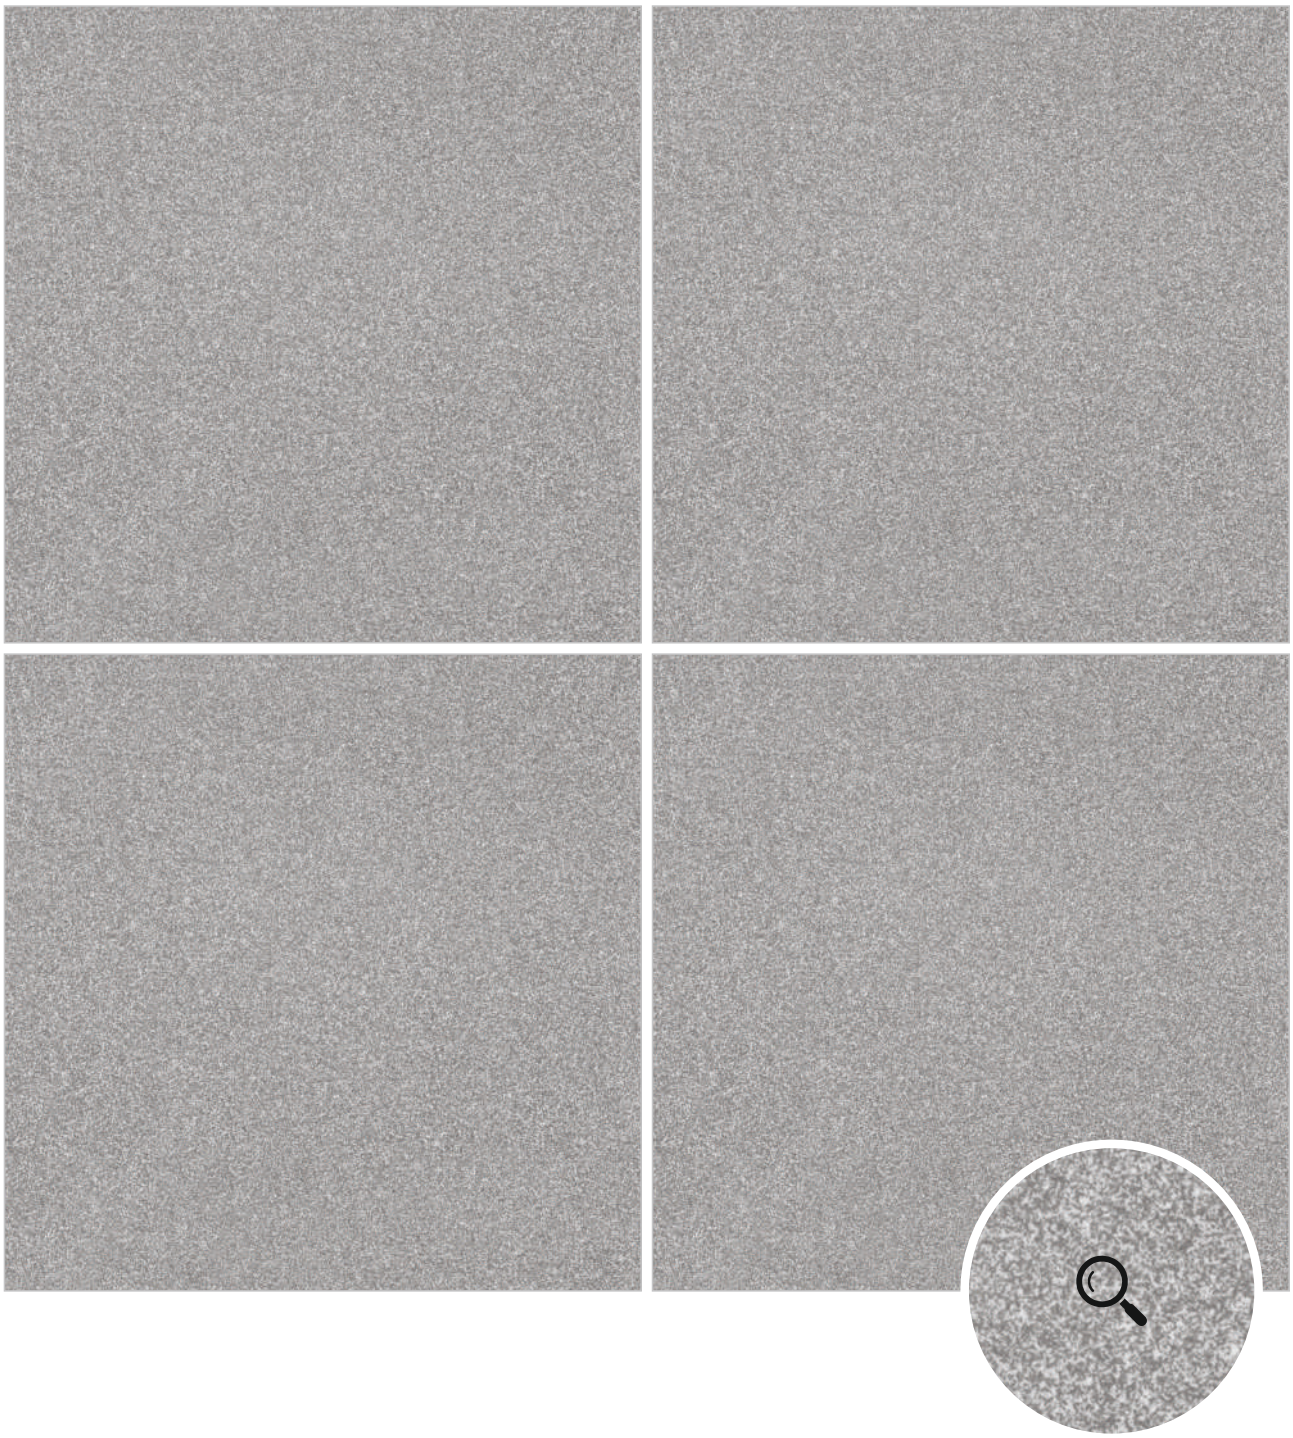

SIZE:	THICKNESS:	SURFACE	TEXTURE
300x300mm	**8mm | 10mm | 12mm**	**MATT**	**PLAIN**




AREO
GREY

SALT & PEPPER
COLLECTION

FULLBODY
VITRIFIED
TILES

CEMENT
GREY

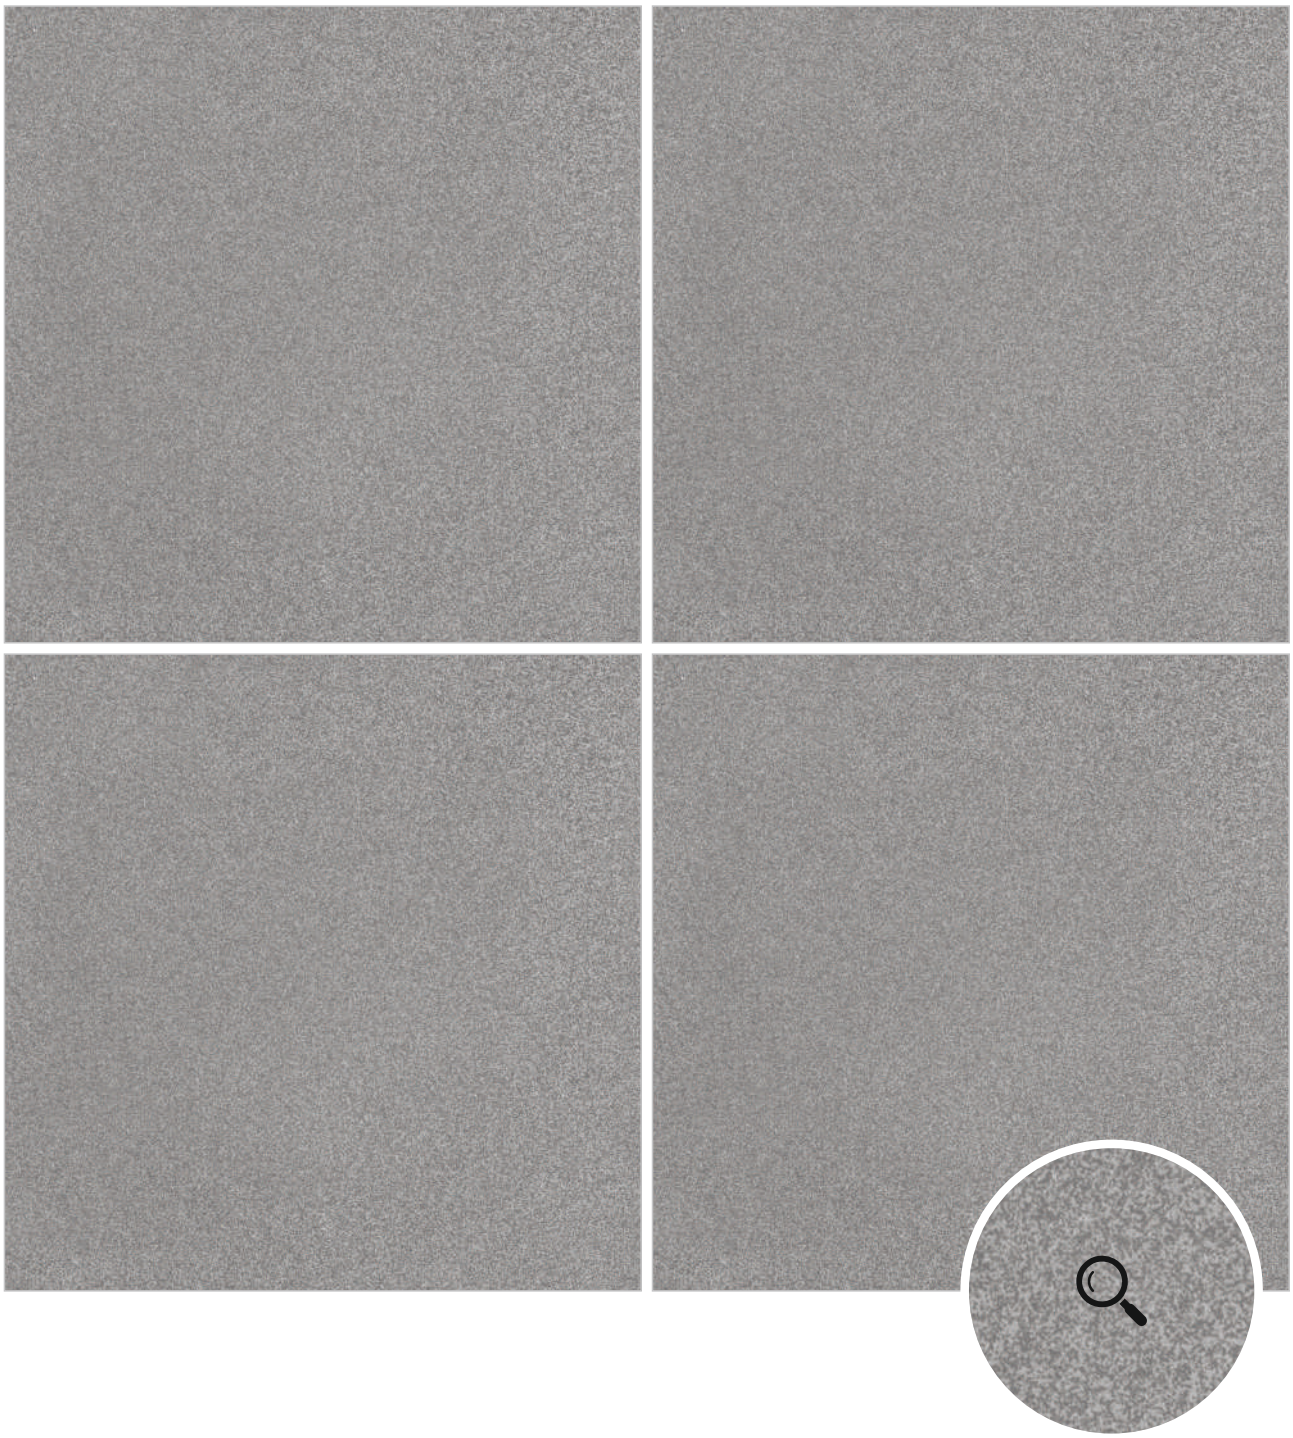

SIZE:	THICKNESS:	SURFACE	TEXTURE
300x300mm	**8mm I 10mm I 12mm**	**MATT**	**PLAIN**




CEMENT
GREY

SALT & PEPPER
COLLECTION

FULLBODY
VITRIFIED
TILES

ANTIQUE GREY

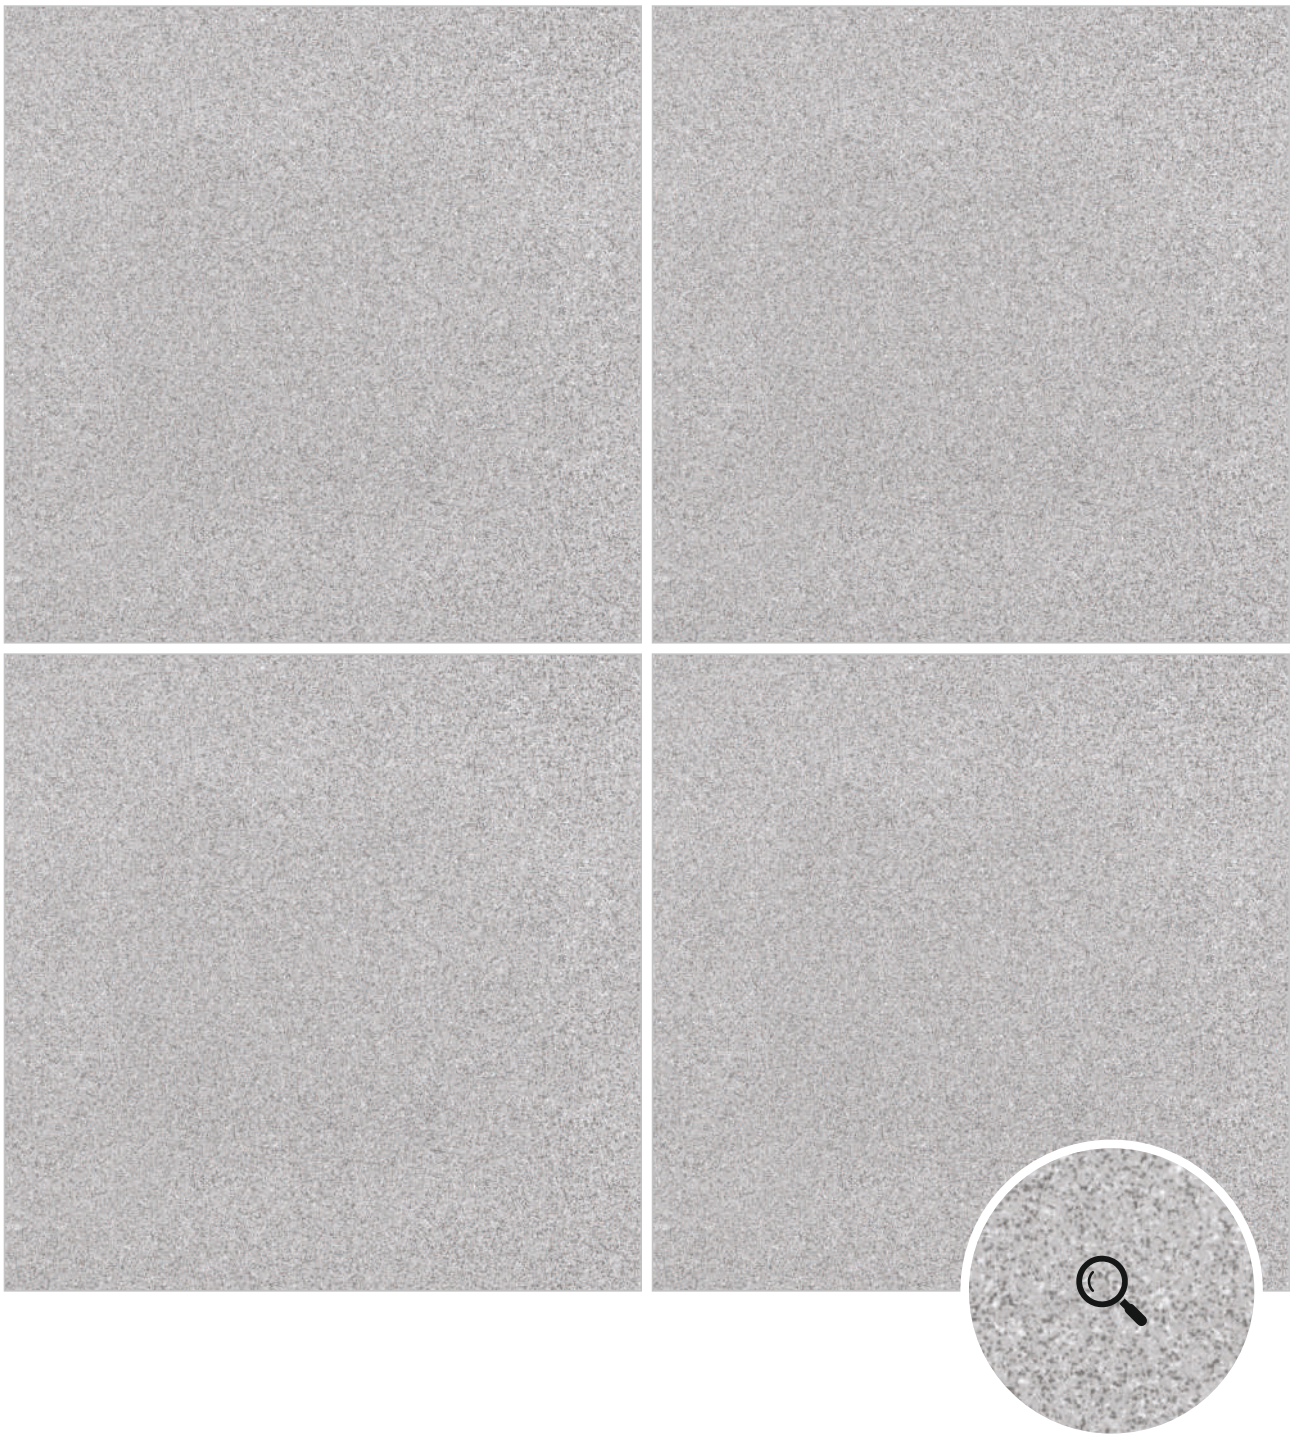

SIZE:	THICKNESS:	SURFACE	TEXTURE
300x300mm	**8mm I 10mm I 12mm**	**MATT**	**PLAIN**




ANTIQUE
GREY

SALT & PEPPER
COLLECTION

FULLBODY
VITRIFIED
TILES

MASHROOM CREAM

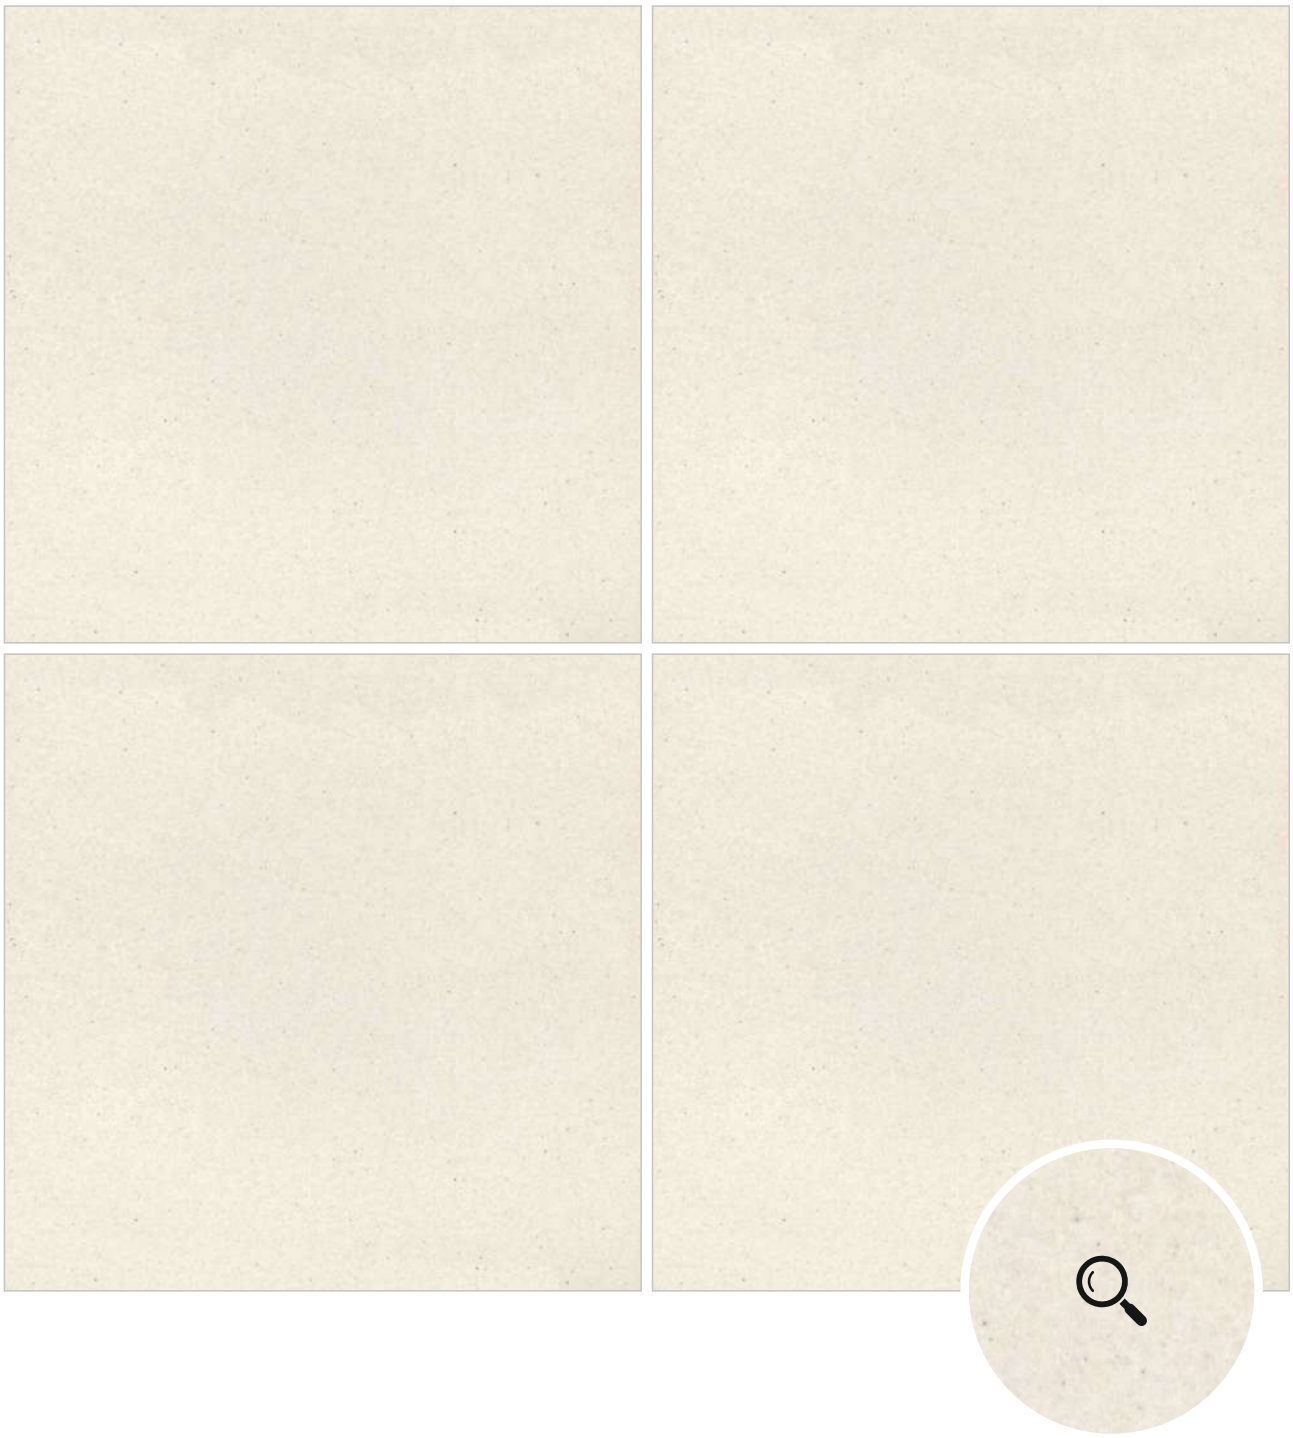

SIZE:	THICKNESS:	SURFACE	TEXTURE
300x300mm	**8mm I 10mm I 12mm**	**MATT**	**PLAIN**



MASHROOM
CREAM

CHARACTERISTICS OF FULLBODY VITRIFIED TILES

TECHNICAL DETAILS	STANDARD AS PER ISO-13006/EN176 GROUP B1A	MEAN VALUE OF FULL BODY VITRIFIED TILES	METHOD OF TEST
Deviation in Length & Width	± 0.60%	± 0.10%	ISO-10545-2
Deviation in Thickness	+ 5.00%	+ 2.00%	ISO-10545-2
Straghtness of Sides	± 0.50%	± 0.10%	ISO-10545-2
Rectangularity	± 0.60%	± 0.10%	ISO-10545-2
Surface Flatness	± 0.50%	± 0.10%	ISO-10545-2
Water Absorption	≤ 0.50%	≤ 0.03%	ISO-10545-3
Breaking Strengh	1300N	2000N	ISO-10545-4
Abrasion Resistance	Max. 175mm	Max. 145mm3	ISO-10545-6
Moh's Hardness	Min. 6	≥6*	En101
Frost Resistance	Frost Proof	Frost Proof	ISO-10545-12
Thermal Shock	No Damage	No Damage	ISO-10545-9
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Expansion	<9x10-6	<6x10-6	ISO-10545-8
Resistance of House Hold Chemical	No Damage	No Damage	ISO-10545-13
Stain Resistance	Resistance	Resistance	ISO-10545-14
Slip Resistance	>0.40	>0.40	ISO-10545-17

PACKAGING DETAILS

SIZE	THICKNESS	PIECES/BOX	SQM./BOX	SQFT./BOX	KG/BOX
300X300MM (12"X12")	8.00MM	09	0.81	8.72	14.00
300X300MM (12"X12")	10.00MM	07	0.63	6.78	14.00
300X300MM (12"X12")	12.00MM	06	0.54	5.81	14.00

SIZE RANGE

100X100MM [PAVERS - 12MM]



12MM



12MM [PUNCH]

200X200MM [NON RECTIFIED]

8MM

10MM



12MM

Note :

- Size / shade variation is inherent in porcelain tiles , in case of any complain its should be brought to our dealer's notice before laying the tiles.
- Colour shown are indicative only. Check actual tiles for exact colour.
- The information contained in this catalogue are accurate as possible, but cannot be considered as legally binding.
- Customers are advised to inspect a sample of the tile before ordering.
- The company reserves the right to change the specifications without prior notice.

TILE FIXING INSTRUCTIONS

It is necessary to use an appropriate adhesive and grouting material for each product An initial approach must be made before starting the installation and take into account the type of joint, structural, perimeter, expansion and installation that must be used for each use. We advise that to obtain an optimal result a 1.5 mm joint should be used

Once the placement is finished: it is recommended to remove the remains of adhesive material and specific grouting for each material, following the manufacturer's instructions for these products.

In general, powder detergents and aggressive scouring pads should not be used for cleaning. It is enough to clean the tiles with a sponge, warm water and a neutral liquid soap. Finally, rinse with clean water.