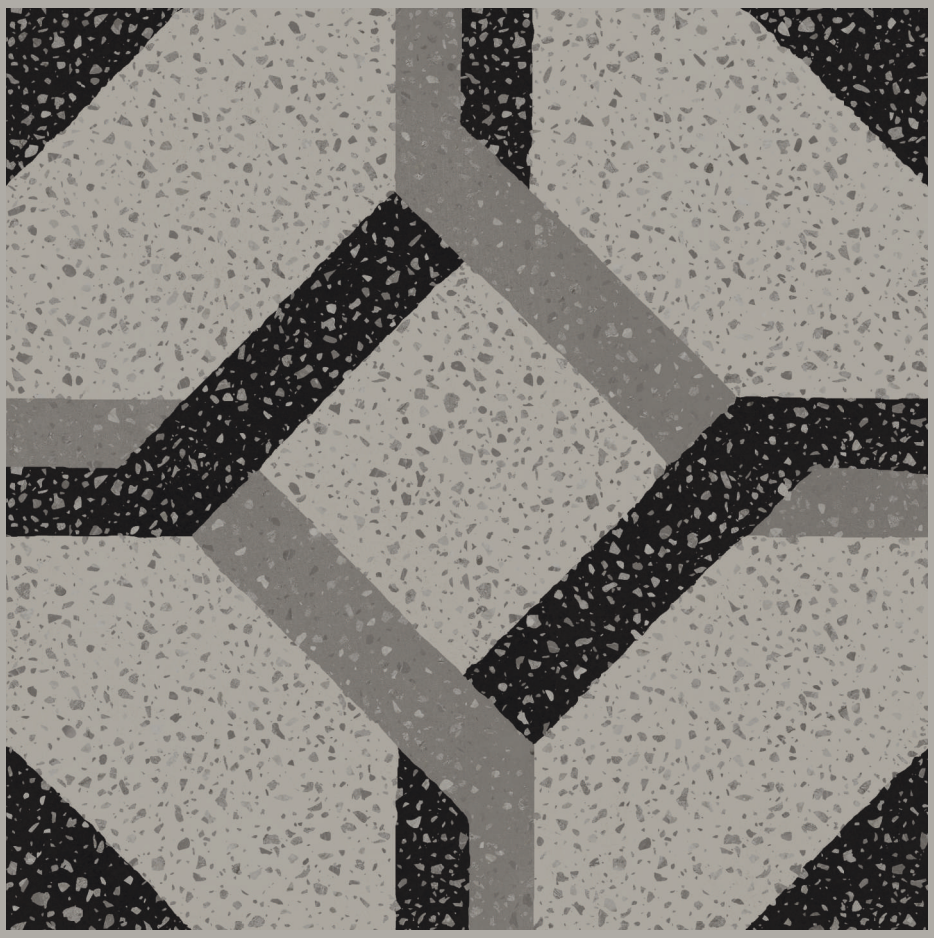


TERRAZZO COLLECTION

GLAZED VITRIFIED TILES

300X300MM (CARVING)

TERRAZZO

COLLECTION

Witness the fabulous tiles in a carving finish that comes in glorious design choices. It comes in 300x300mm dimension and has 4 sensational color variants as well. Choose it for your amazing ambiance.



TERRAZZO
COLLECTION


GLAZED
VITRIFIED
TILES

20451 BASE



SIZE:
300x300mm

SURFACE
CARVING



CARVING

TERRAZZO
COLLECTION


GLAZED
VITRIFIED
TILES

20452 OCTAVIA DESERT



SIZE:
300x300mm

SURFACE
CARVING



CARVING



20451 & 20452

TERRAZZO
COLLECTION


GLAZED
VITRIFIED
TILES

20453 BRACE STONE



SIZE:
300x300mm

SURFACE
CARVING



CARVING



20453

TERRAZZO
COLLECTION


GLAZED
VITRIFIED
TILES

20454 STRAP FOREST



SIZE:
300x300mm

SURFACE
CARVING



CARVING



20454

CHARACTERISTICS OF GLAZED PORCELAIN TILES

DRY-PRESSED CERAMIC TILES, WITH LOW WATER ABSORPTION $\leq$ 0.5%,
FOR INTERNAL AND EXTERNAL WALLS AND FLOORS

Fire Reaction	Class A1
Breaking Strength	$\geq$ 1300 N
Thermal Shock Resistance	PASS
Durability For:	
Indoor Uses	PASS
Outdoor Uses	PASS
Frost Resistance	PASS
Resistance to Chemical for Household use and Swimming Pool Salts	ISO 10545-13 GA
Resistance to Low Concentrations of Acids and Alkalis	ISO 10545-13 GLA
Resistance to High Concentrations of Acids and Alkalis	ISO 10545-13 GHA
Stain Resistance	ISO 10545-14 Class 5

PACKAGING DETAILS

SIZE	THICKNESS	PIECES/BOX	SQM./BOX	SQFT./BOX	KG/BOX
300X300MM (12"X12")	8.00MM	09	0.81	8.72	14.00

Note :

- Size / shade variation is inherent in porcelain tiles , in case of any complain its should be brought to our dealer's notice before laying the tiles.
- Colour shown are indicative only. Check actual tiles for exact colour.
- The information contained in this catalogue are accurate as possible, but cannot be considered as legally binding.
- Customers are advised to inspect a sample of the tile before ordering.
- The company reserves the right to change the specifications without prior notice.

Exterior Elevation or interior Walls & Floors



TILE FIXING INSTRUCTIONS

It is necessary to use an appropriate adhesive and grouting material for each product An initial approach must be made before starting the installation and take into account the type of joint, structural, perimeter, expansion and installation that must be used for each use. We advise that to obtain an optimal result a 3 mm joint should be used

Once the placement is finished: it is recommended to remove the remains of adhesive material and specific grouting for each material, following the manufacturer's instructions for these products.

In general, powder detergents and aggressive scouring pads should not be used for cleaning. It is enough to clean the tiles with a sponge, warm water and a neutral liquid soap. Finally, rinse with clean water.

