
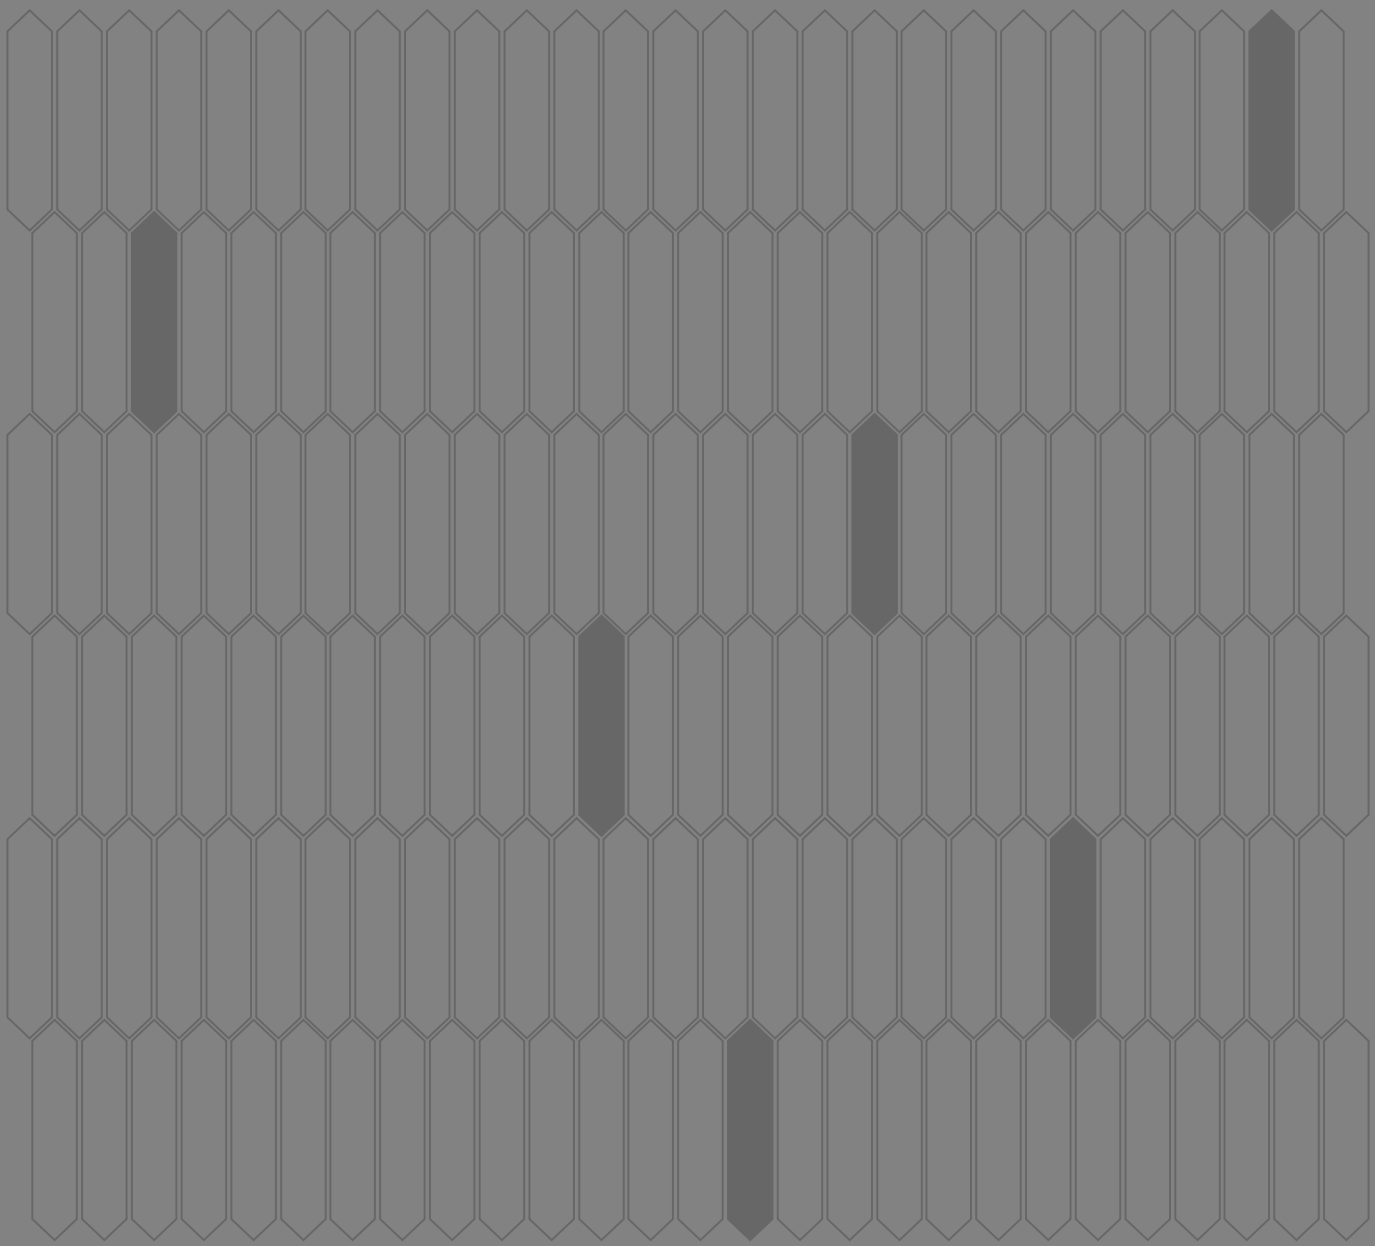


MILAGRO COLLECTION

50X250MM (GLOSSY)

MILAGRO
COLLECTION

Dive into a world of possibilities with our collection of a spectrum of vibrant colorful tiles. Offering 10 distinctive colors, each tile is a canvas of style, suited for diverse tastes and spaces.

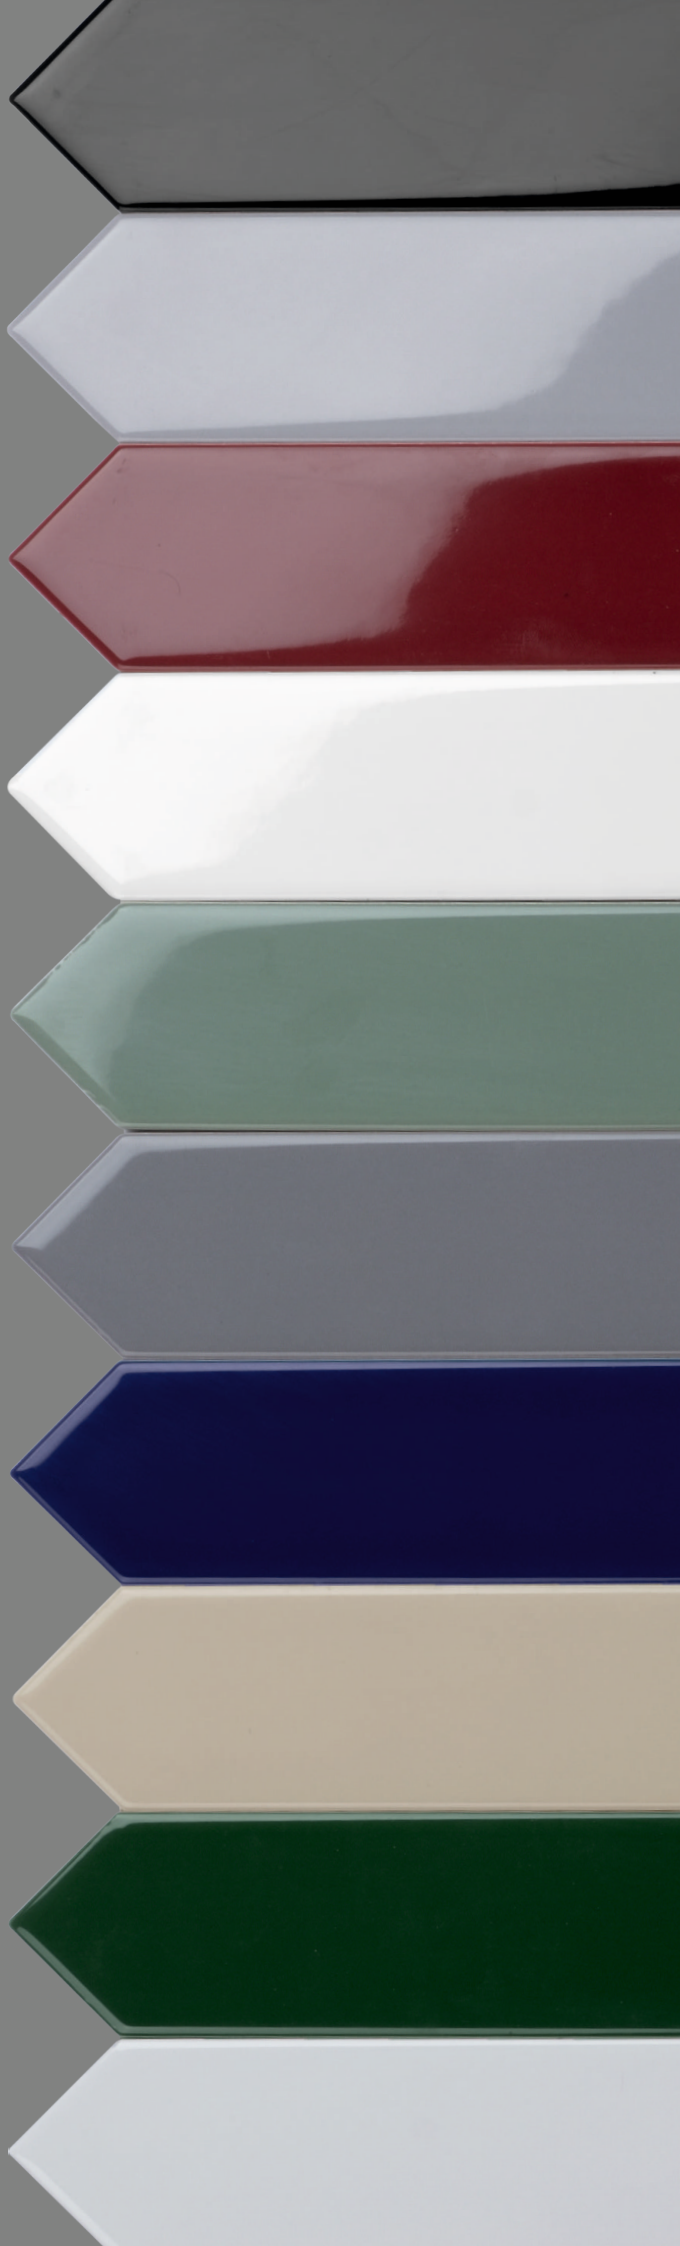

MILAGRO
COLLECTION



[MILAGRO WHITE]



[MILAGRO CLOUD GREY]



[MILAGRO DOLPHIN GREY]

SIZE.
50X250MM


SURFACE
GLOSSY

WALL TILE

MILAGRO
COLLECTION



[MILAGRO OSCURO GREY]

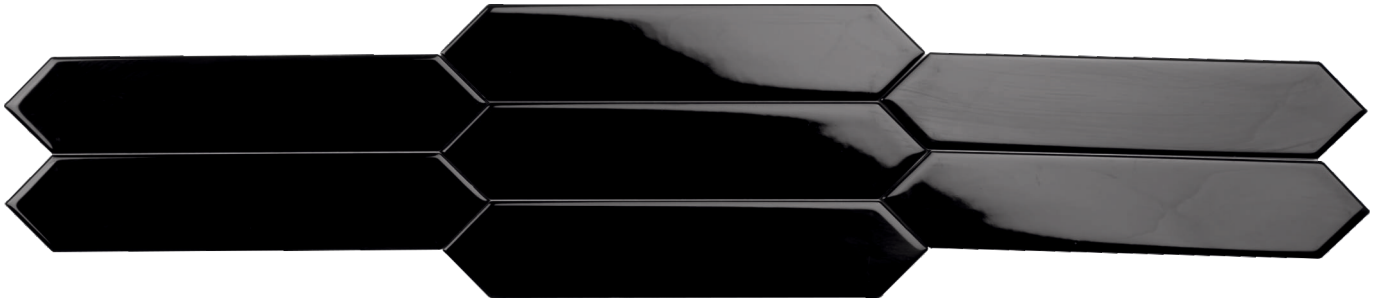

[MILAGRO JET BLACK]




[MILAGRO CASTLE SAND]

SIZE.
50X250MM

SURFACE
GLOSSY

WALL TILE

MILAGRO
COLLECTION

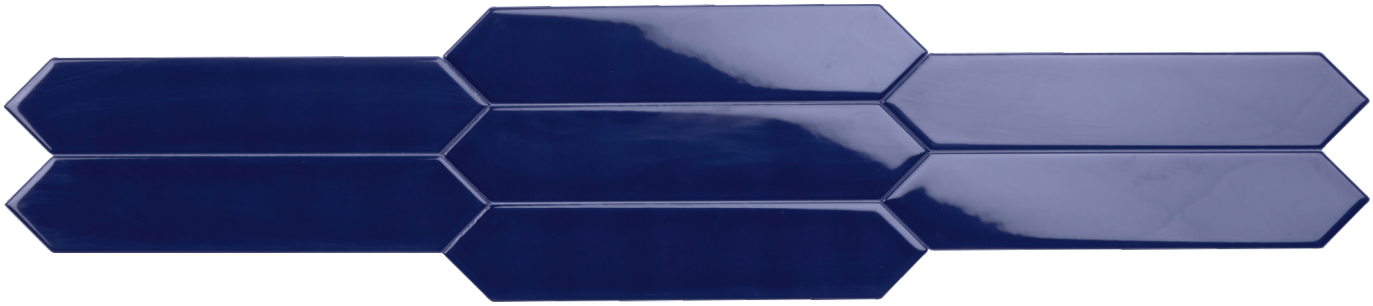

[MILAGRO ESTRELLA BLUE]



[MILAGRO CHERRY RED]



[MILAGRO BOTTELA GREEN]

SIZE.
50X250MM

SURFACE
GLOSSY

WALL TILE

MILAGRO
COLLECTION



[MILAGRO DUCK EGG]

SIZE.
50X250MM

SURFACE
GLOSSY

WALL TILE



MILAGRO WHITE



MILAGRO DOLPHIN GREY



MILAGRO OSCURO GREY


MILAGRO JET BLACK



MILAGRO CASTLE SAND



MILAGRO ESTRELLA BLUE


MILAGRO CHERRY RED



MILAGRO BOTTELA GREEN

TECHNICAL SPECIFICATION as per ISO 13006:2018 - ANNEXL

Sr.No.	Property	International Std.	OUR Tiles Value	Method of Testing
1	Deviation in Length and Width	± 0.6%	± 0.13%	ISO-10545-2
2	Deviation in Thickness	± 10%	± 2.74%	ISO-10545-2
3	Straightness of Sides	± 0.5%	± 0.29%	ISO-10545-2
4	Rectangularity	± 0.5%	± 0.38%	ISO-10545-2
5	Surface Flatness	± 0.5%	± 0.28%	ISO-10545-2
5	Water Absorption	>10%	11.70%	ISO-10545-3
6	MOR	MInimum 12 N/mm3	15.95 N/mm3	ISO-10545-4
7	Breaking Strength	Minimum 600 N	740.31 N	ISO-10545-4
8	Surface Quality	Minimum 95%	100%	ISO-10545-2
9	Density (g/cc)	Minimum 2.2	2.2528 g/cc	ISO-10545-3
10	Chemical Resistance	Minimum Class B	Class GB (PASS)	ISO-10545-13
11	Crazing Resistance	2 cycle	2 cycle (PASS) Fully Resistance	ISO-10545-11
12	Thermal Shock Resistance	10 cycle	10 cycle (PASS) Fully Resistance	ISO-10545-9
13	Coefficient of Liner Thermal Expansion	Maximum 9 x 10 -6	5.15 x 10 -6	ISO-10545-8
14	Small colour differences (Plain Colour Tiles)	GL < 0.75	GL < 0.55	ISO-10545-16
15	Resistance to Staining	Min Class - 3	Class 4	ISO-10545-14
16	Resistance to Low Concentration of Acid & Alkali	Class GLA	Class GLA	ISO-10545-13
17	Resistance to Low Concentration of Acid & Alkali	Class GHA	Class GHA	ISO-10545-13
18	Household Chemical Resistance	Minimum Class B	Class GA	ISO-10545-13
19	Swimming Pool Salt	Minimum Class B	Class GA	ISO-10545-13
20	Lead and Cadmium Release	Maximum 0.1mg/dm2	0.008mg/dm2	ISO-10545-15

PACKAGING DETAILS

SIZE	THICKNESS	PIECES/BOX	SQM./BOX	SQFT./BOX	KG/BOX
50X250MM (2"X10")	8.00MM	22	0.25	2.70	4.00

Note :

- Size / shade variation is inherent in ceramic tiles , in case of any complain its should be brought to our dealer's notice before laying the tiles.
- Colour shown are indicative only. Check actual tiles for exact colour.
- The information contained in this catalogue are accurate as possible, but cannot be considered as legally binding.
- Customers are advised to inspect a sample of the tile before ordering.
- The company reserves the right to change the specifications without prior notice.

Exterior Elevation or interior Walls

